

KOMUNIKATORIAI

Interlogix NX-4V2 / NX-6V2 su GT/GT+/GET greitas paruošimas



GT product
image

GT



GT+ product
image

GT+



GET product
image

GET

Trumpi pajungimo ir programavimo žingsniai, skirti prijungti GT/GT+/GET komunikatorių prie Interlogix NX-4V2, Interlogix NX-6V2 centralės naudojant KeyBus, tada pridėti sistemą į Protegus2. Naudokite kartu su pilnais vadovais kitiems nustatymams. (Gnybtų pavadinimai GT/GT+/GET gali nežymiai skirtis, tačiau jungtys yra tokios pačios.)



ATSARGIAI

Montavimą ir aptarnavimą gali atlikti tik kvalifikuoti specialistai. Prieš jungdami laidus atjunkite maitinimą. Neautorizuoti pakeitimai panaikina garantiją.

1. Reikalavimai

1. GT/GT+/GET programinės įrangos versija 1.21, įdėta SIM kortelė, PIN išjungtas, aktyvus duomenų planas.
2. Interlogix NX-4V2 / NX-6V2 centralė su klaviatūros prieiga (yra montuotojo kodas).
3. CMS paskyros numeris, jei pranešimai siunčiami į CMS.
4. Protegus2 įmonės/montuotojo paskyra ir komunikatoriaus IMEI.

Cookie consent


We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.



Google Analytics

Accept

Reject

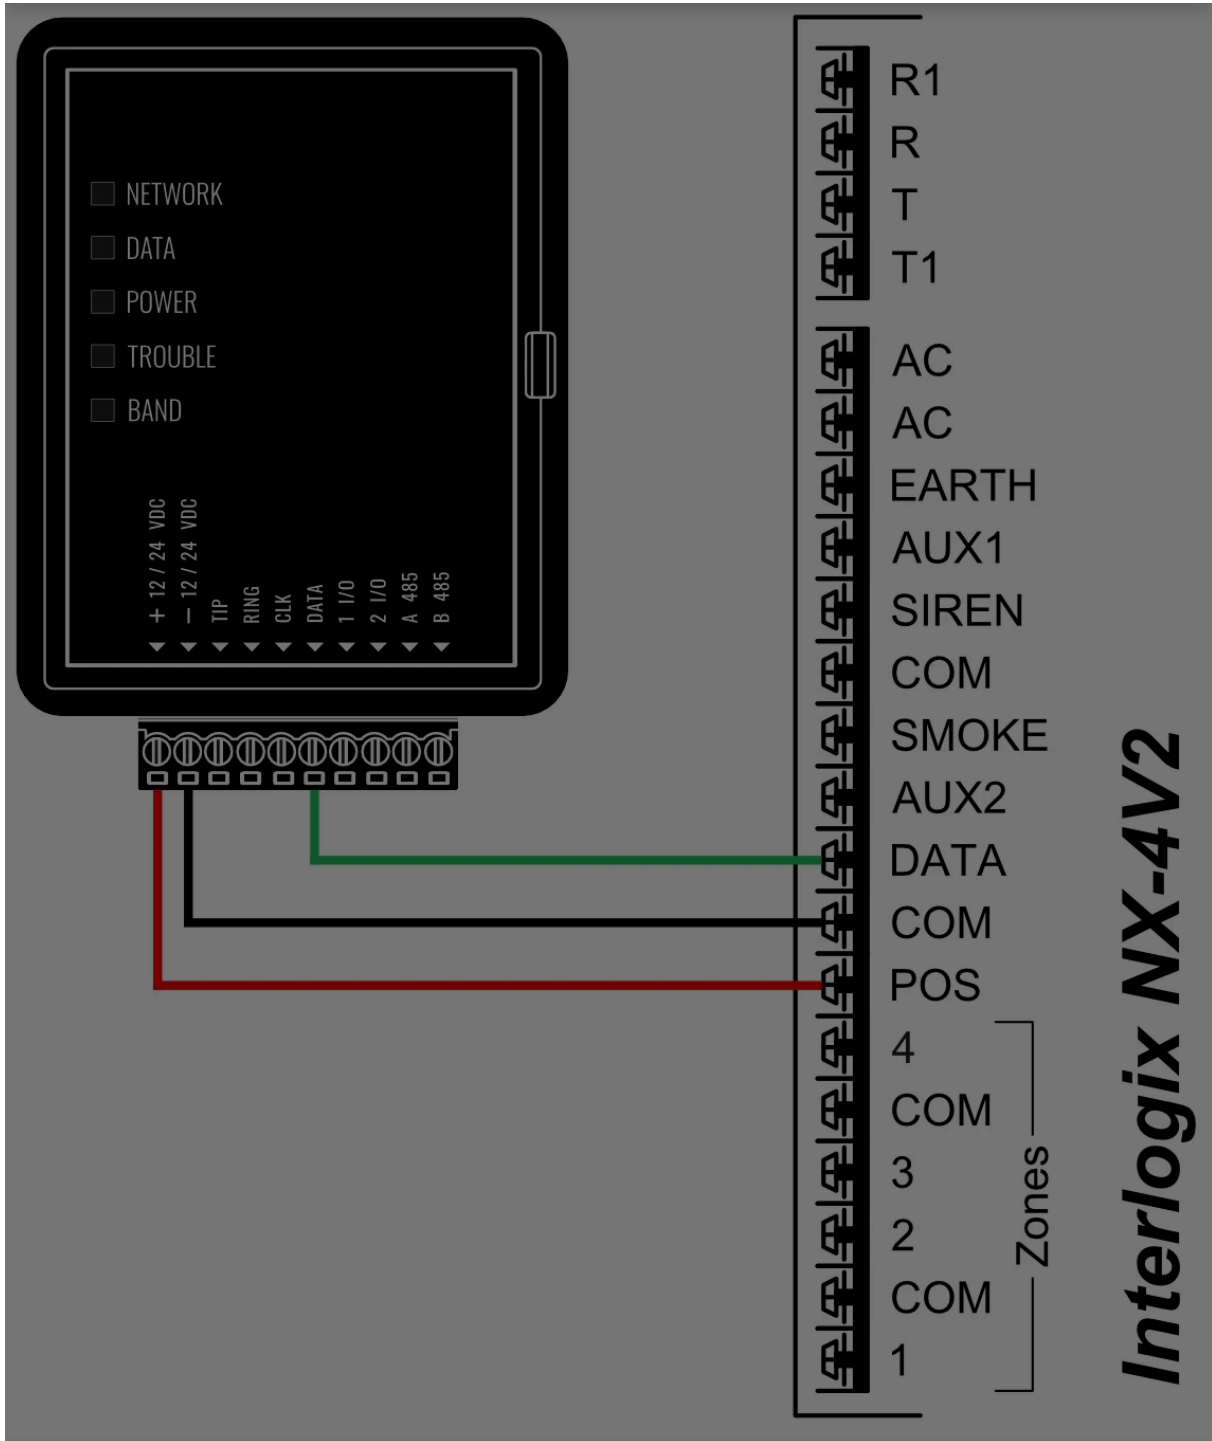


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics



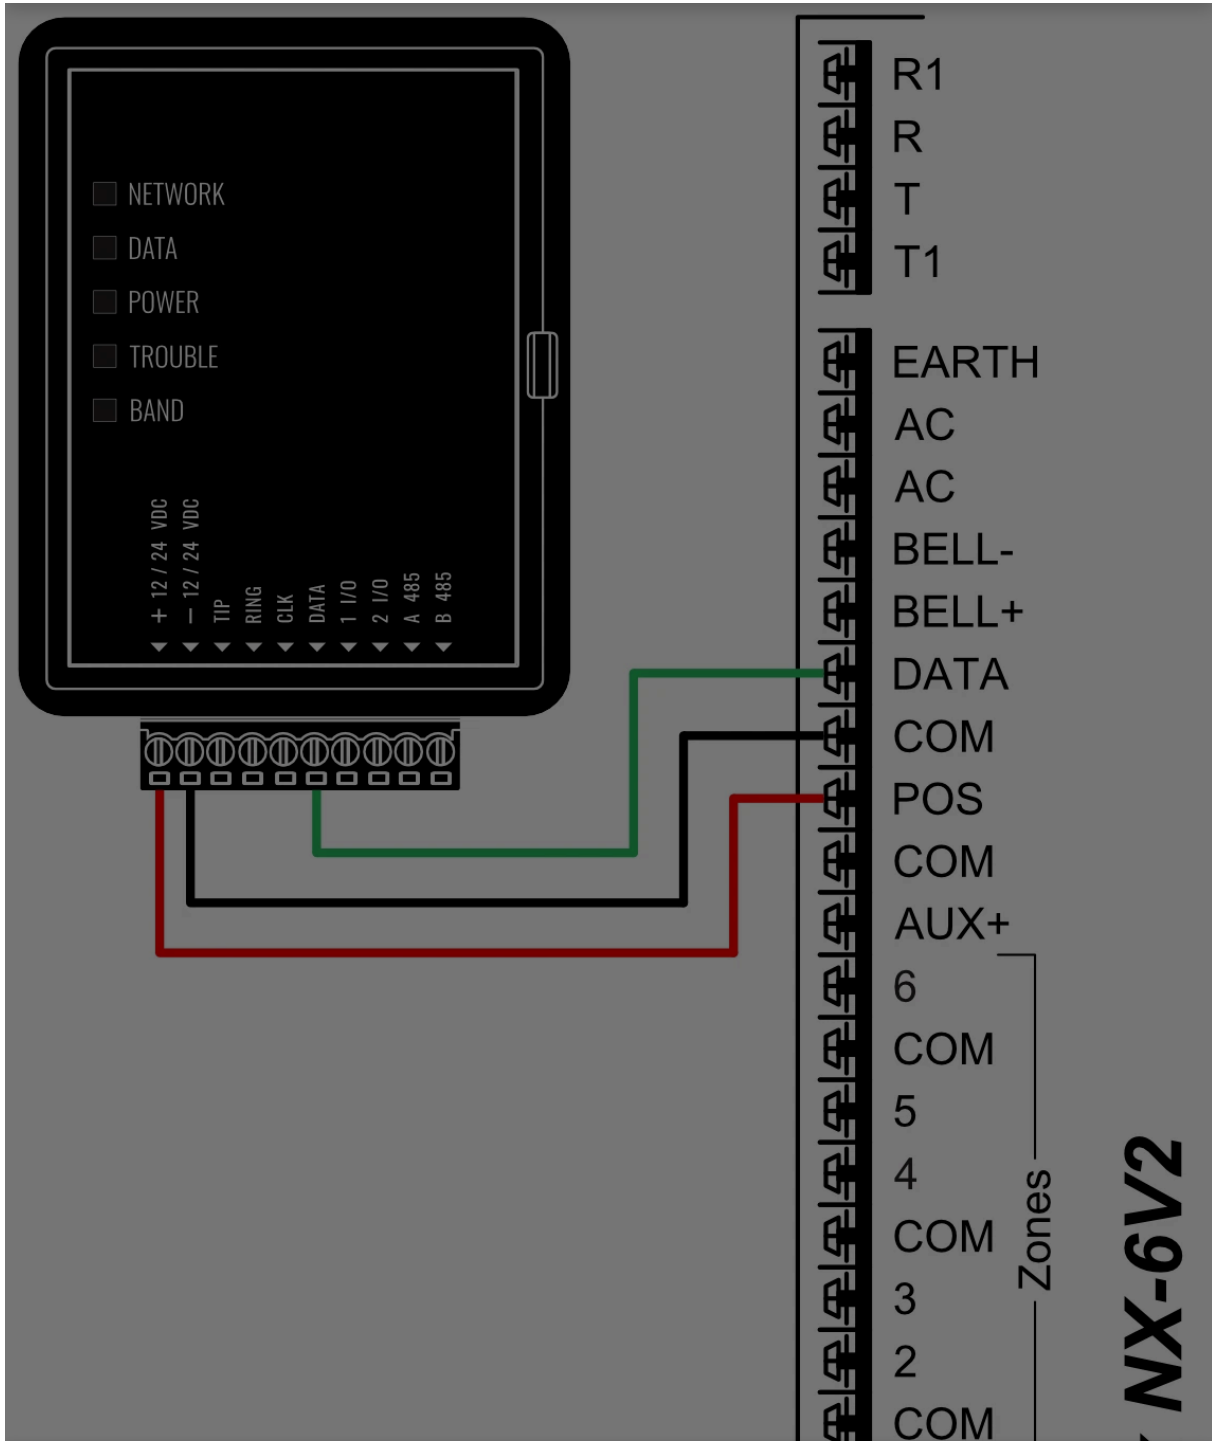

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics





3. Interlogix NX-4V2, Interlogix NX-6V2 signalizacijos centralės programavimas LCD klaviatūra

Naudodami centralės klaviatūrą įveskite šias sekcijas ir nustatykite kaip nurodyta:

Contact ID pranešimų įjungimas

LCD klaviatūra	Klaviatūros įvedimas	Veiksmo aprašymas
Sistema paruošta	*89713	Įeiti į programavimo režimą
Įveskite įrenginio adresą	0#	Pereiti į pagrindinį panelės programavimo meniu
Įveskite vietą	4#	Pereiti į „Phone1 events reported“ perjungimų meniu
Loc#4 Seg#1	12345678*	Visi perjungimai turi būti įjungti. * išsaugoti ir eiti į kitą meniu
Loc#4 Seg#2	12345678*	Visi perjungimai turi būti įjungti. * išsaugoti ir grįžti atgal.
Įveskite vietą	23#	Pereiti į „Partition features“ meniu.
Loc#23 Seg#1	**	Paspauskite * du kartus, kad pereitumėte į 3 sekcijos perjungimų meniu.
Loc#23 Seg#3	12345678*#	3 sekcija. Visi perjungimai turi būti įjungti, * išsaugoti, tada # išsaugoti ir # grįžti į pagrindinį meniu.
Įveskite vietą	37#	Pereiti į „Siren and system supervision“ meniu.
Loc#37 Seg#1	**	Paspauskite * du kartus, kad pereitumėte į 3 sekcijos perjungimų meniu.
Loc#37 Seg#3	12345678*	3 sekcija. Visi perjungimai turi būti įjungti, * išsaugoti.
Loc#37 Seg#4	12345678*#	4 sekcija. Visi perjungimai turi būti įjungti, * išsaugoti, tada # išsaugoti ir # grįžti į pagrindinį meniu.
Įveskite vietą	EXIT EXIT	Paspauskite „EXIT“ du kartus, kad išeitumėte iš programavimo režimo.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



LED klaviatūra	Klaviatūros įvedimas	Veiksmo aprašymas
Paruošta LED, Maitinimo LED šviečia	*89713	Įeiti į programavimo režimą
Service LED mirksi	0#	Pereiti į pagrindinį panelės programavimo meniu
Service LED mirksi, Armed LED šviečia	4#	Pereiti į „Phone1 events reported“ perjungimų meniu
Visos zonų LED šviečia	12345678*	Visi perjungimai turi būti įjungti. * išsaugoti ir eiti į kitą meniu
Visos zonų LED šviečia	12345678*	Visi perjungimai turi būti įjungti. * išsaugoti ir grįžti atgal.
Service LED mirksi, Armed LED šviečia	23#	Pereiti į „Partition features and reporting selection“ meniu.
Service LED mirksi, Ready LED šviečia	**	Paspauskite * du kartus, kad pereitumėte į 3 sekcijos perjungimų meniu.
Service LED mirksi, Ready LED šviečia	12345678*#	3 sekcija. Visi perjungimai turi būti įjungti, * išsaugoti, tada # išsaugoti ir # grįžti į pagrindinį meniu.
Service LED mirksi, Armed LED šviečia	37#	Pereiti į „Siren and system supervision“ meniu.
Service LED mirksi, Ready LED šviečia	**	Paspauskite * du kartus, kad pereitumėte į 3 sekcijos perjungimų meniu.
Service LED mirksi, Ready LED šviečia	12345678*	3 sekcija. Visi perjungimai turi būti įjungti, * išsaugoti.
Service LED mirksi, Ready LED šviečia	12345678*#	4 sekcija. Visi perjungimai turi būti įjungti, * išsaugoti, tada # išsaugoti ir # grįžti į pagrindinį meniu.
Service LED mirksi, Armed LED šviečia	EXIT EXIT	Paspauskite „EXIT“ du kartus, kad išeitumėte iš programavimo režimo.

5. Sistemos pridėjimas į Protegus2


Žingsnis 1. Paspauskite **Pridėti naują sistemą**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



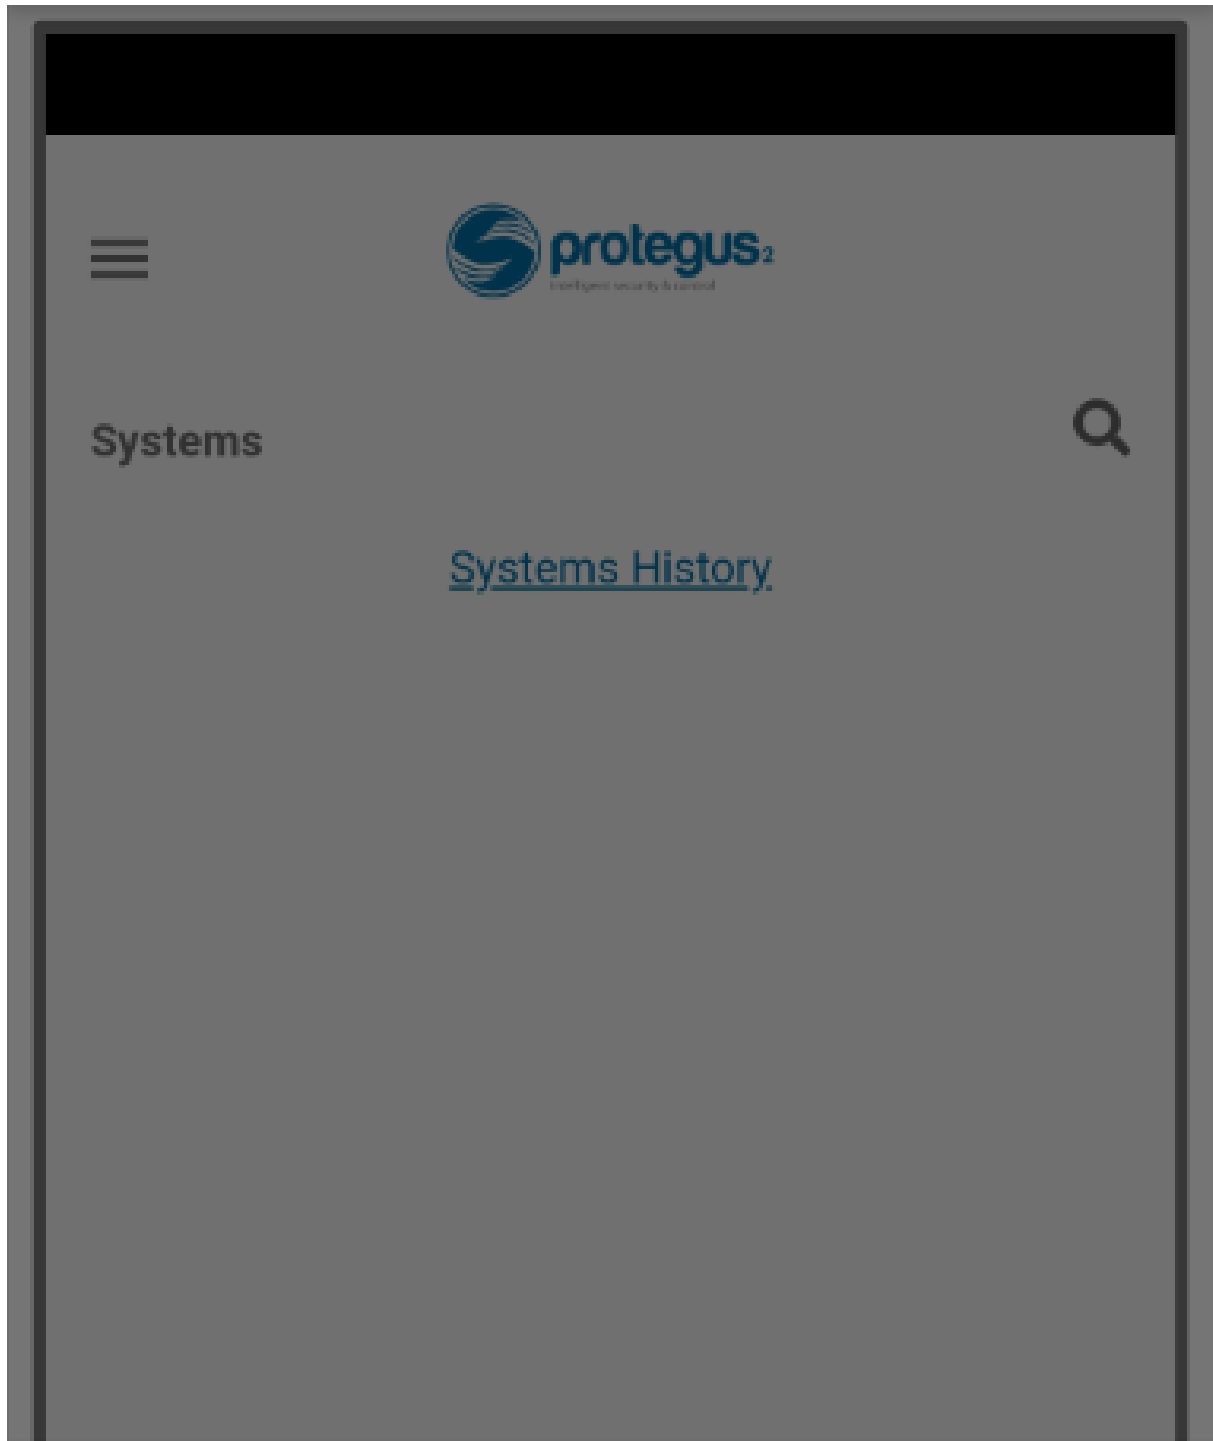

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 2. Įveskite komunikatoriaus **IMEI**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

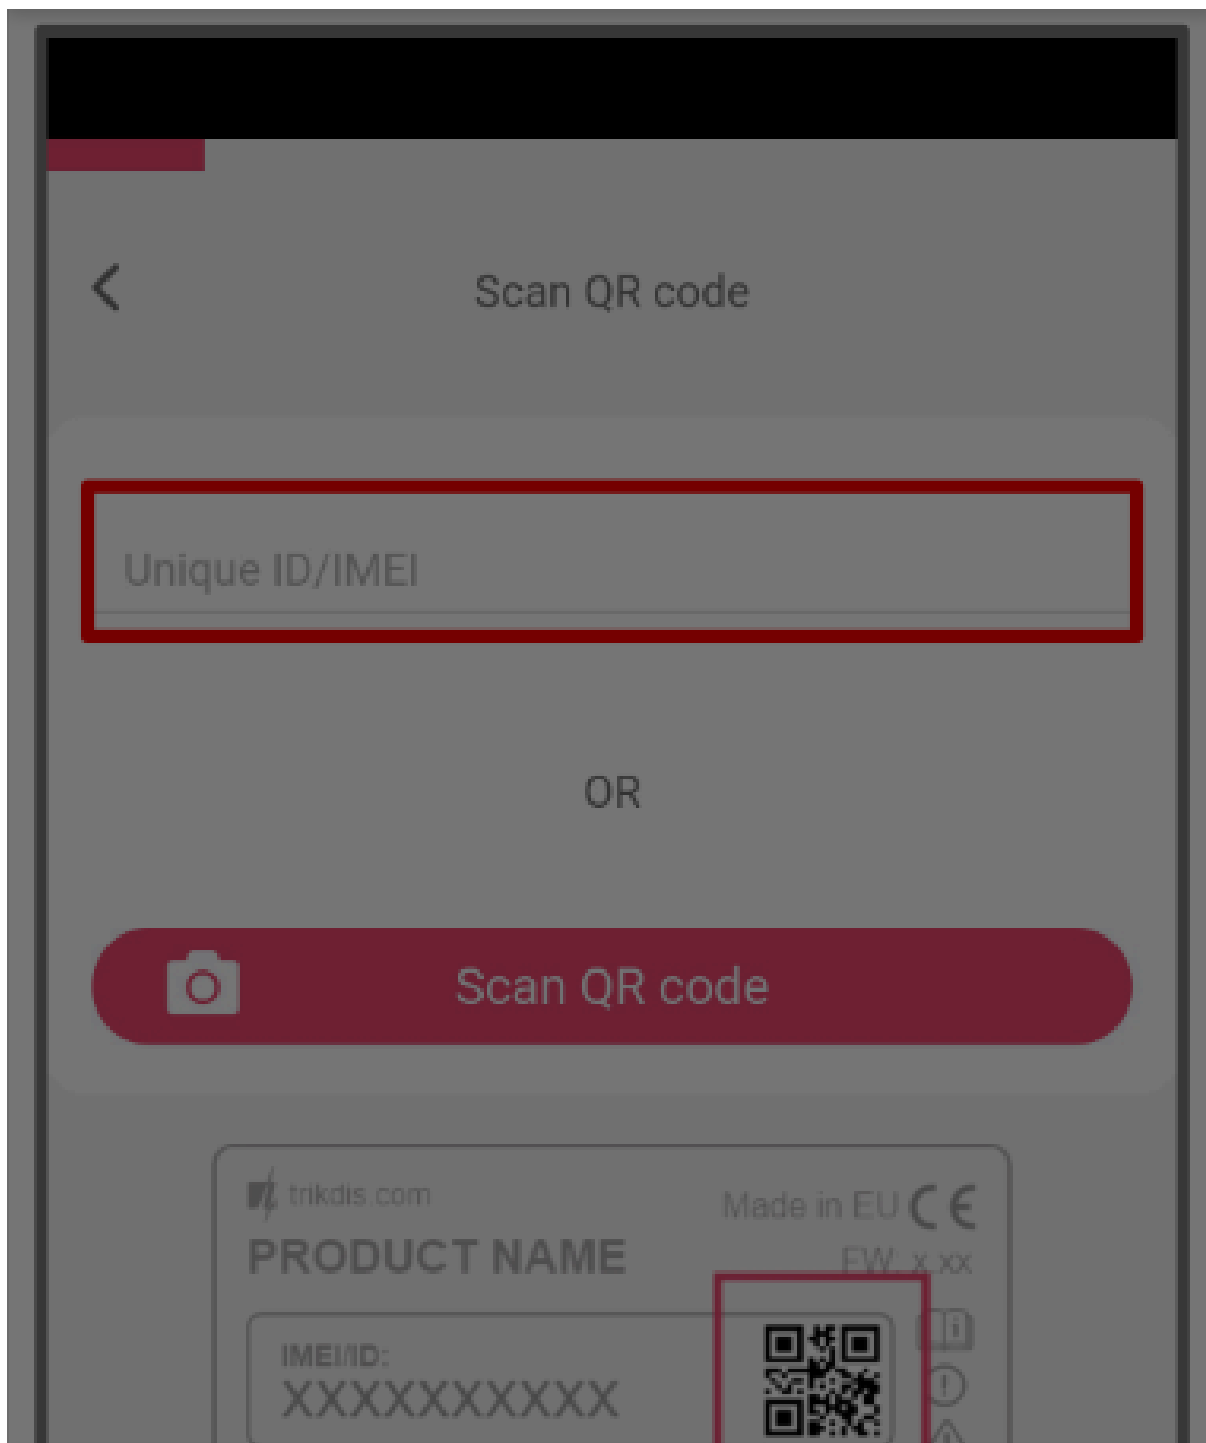


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



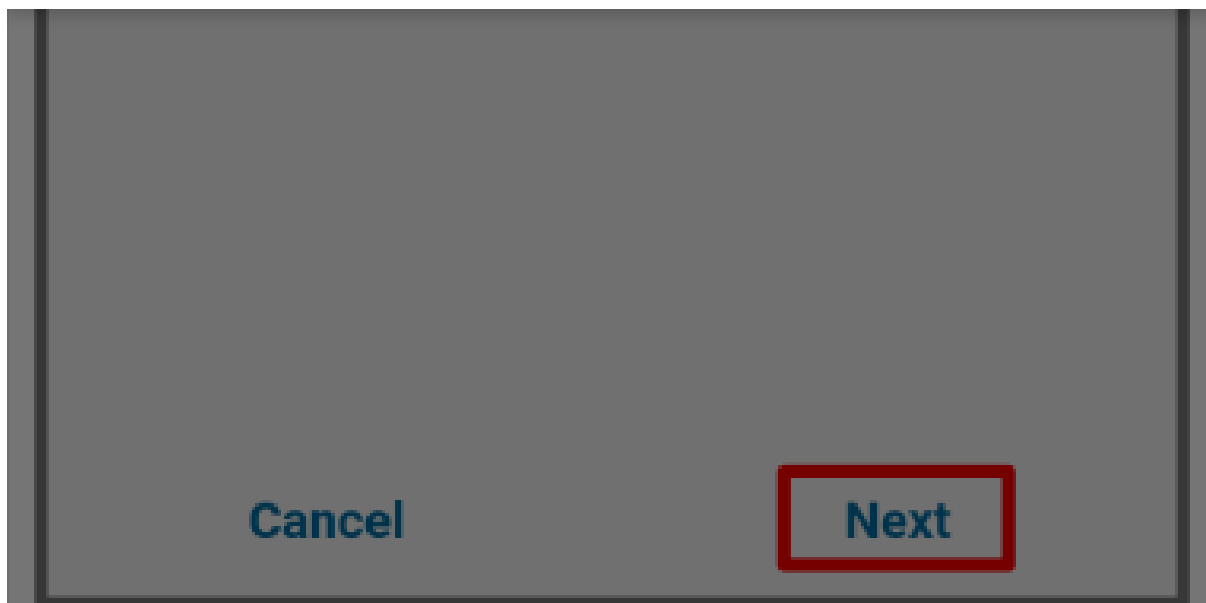

Žingsnis 3. Pasirinkite apsaugos įmonę.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Add only to Protegus2

Žingsnis 4. Pasirinkite **Interlogix**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

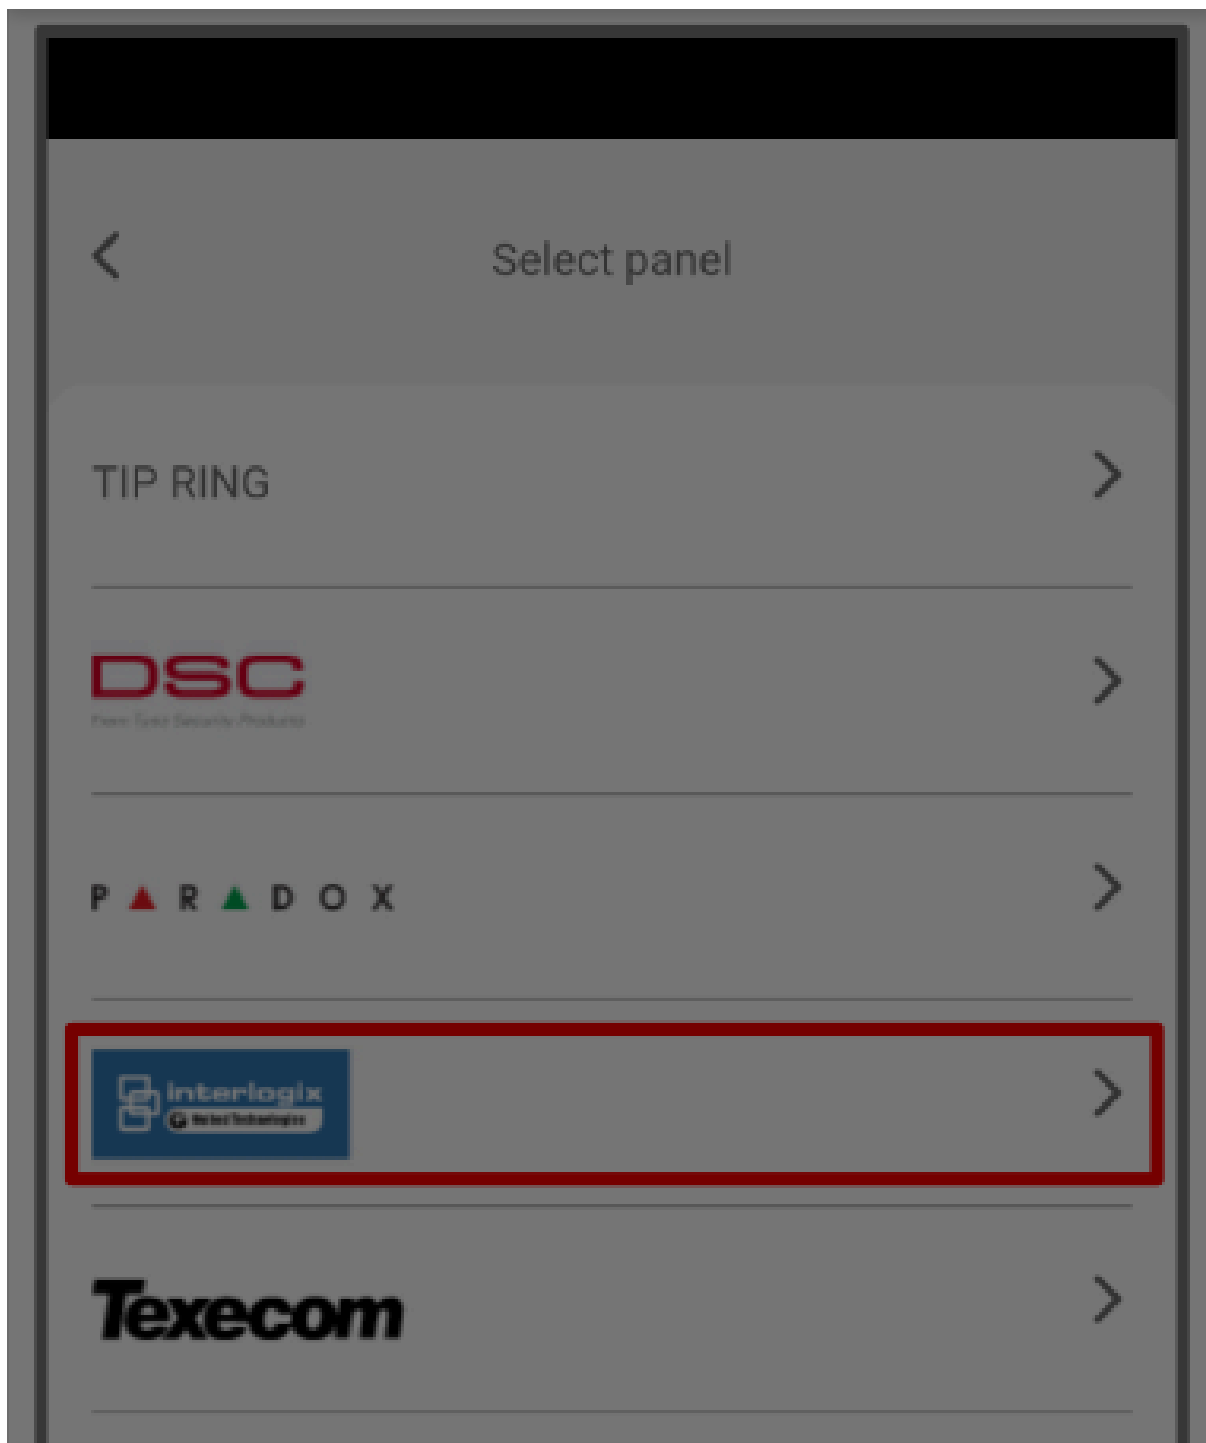

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel

Žingsnis 5. Pasirinkite **NX-4 (NX-6)**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Žingsnis 6. Įveskite **Object ID** ir **Module ID**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



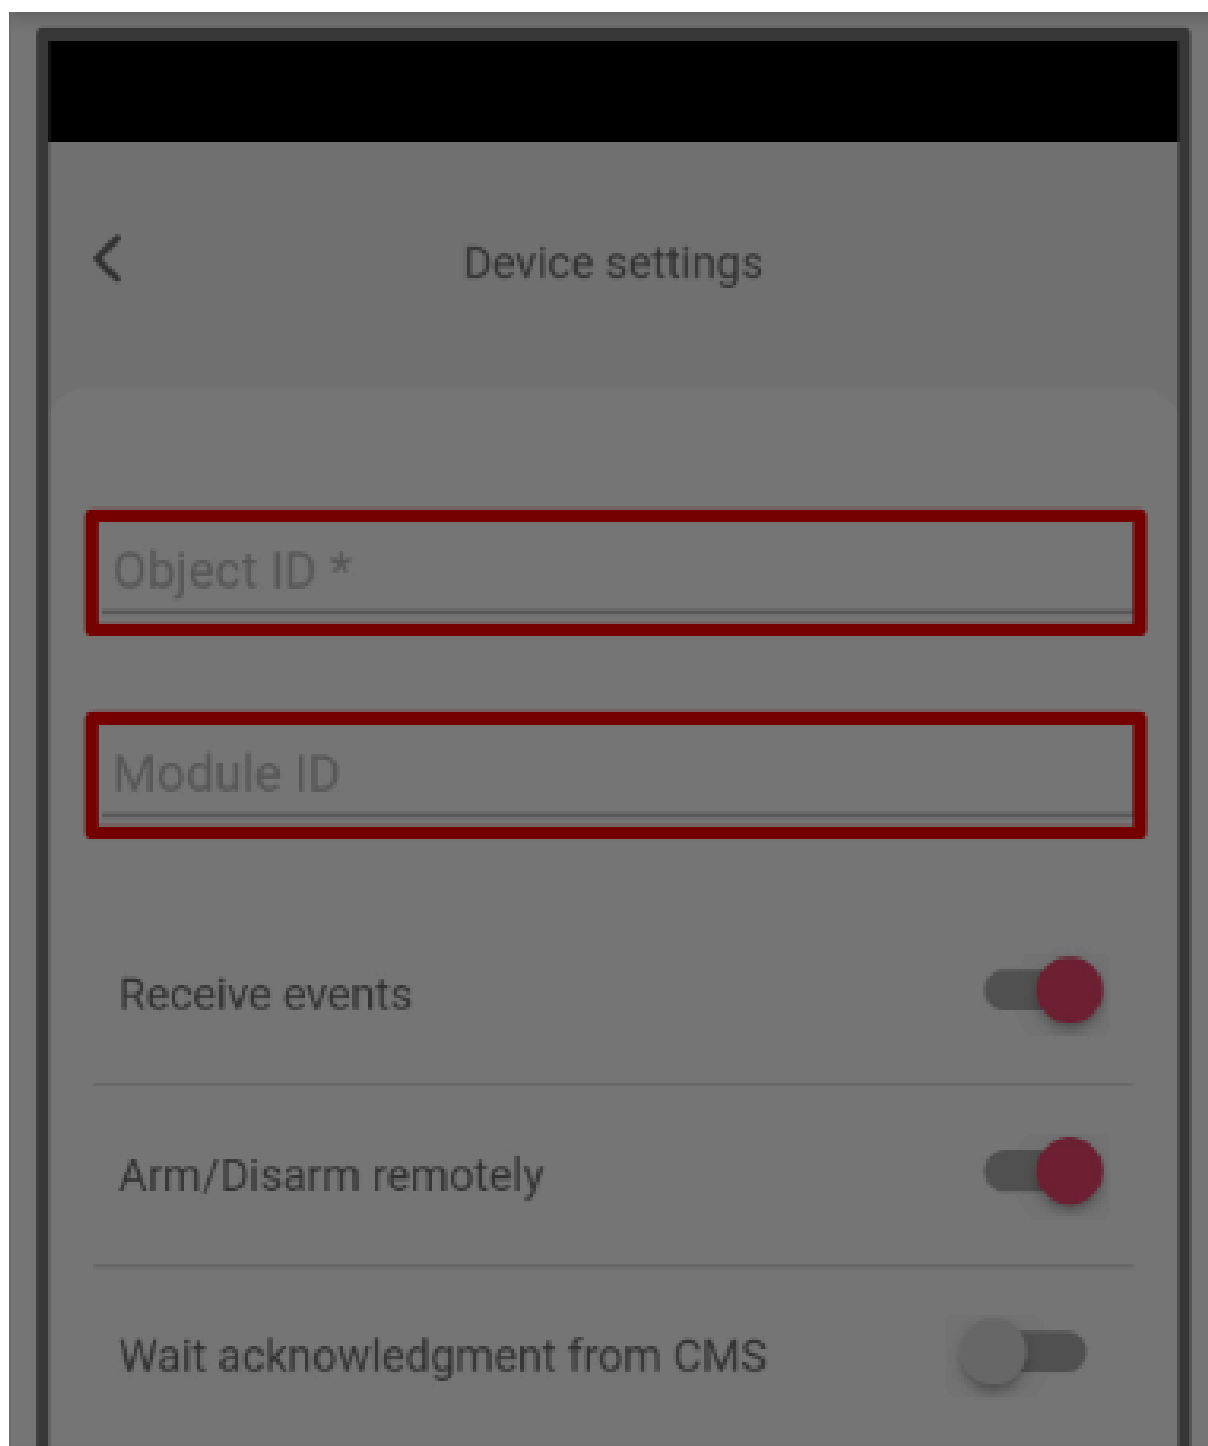

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 7. Palaukite, kol įrašomi duomenys.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



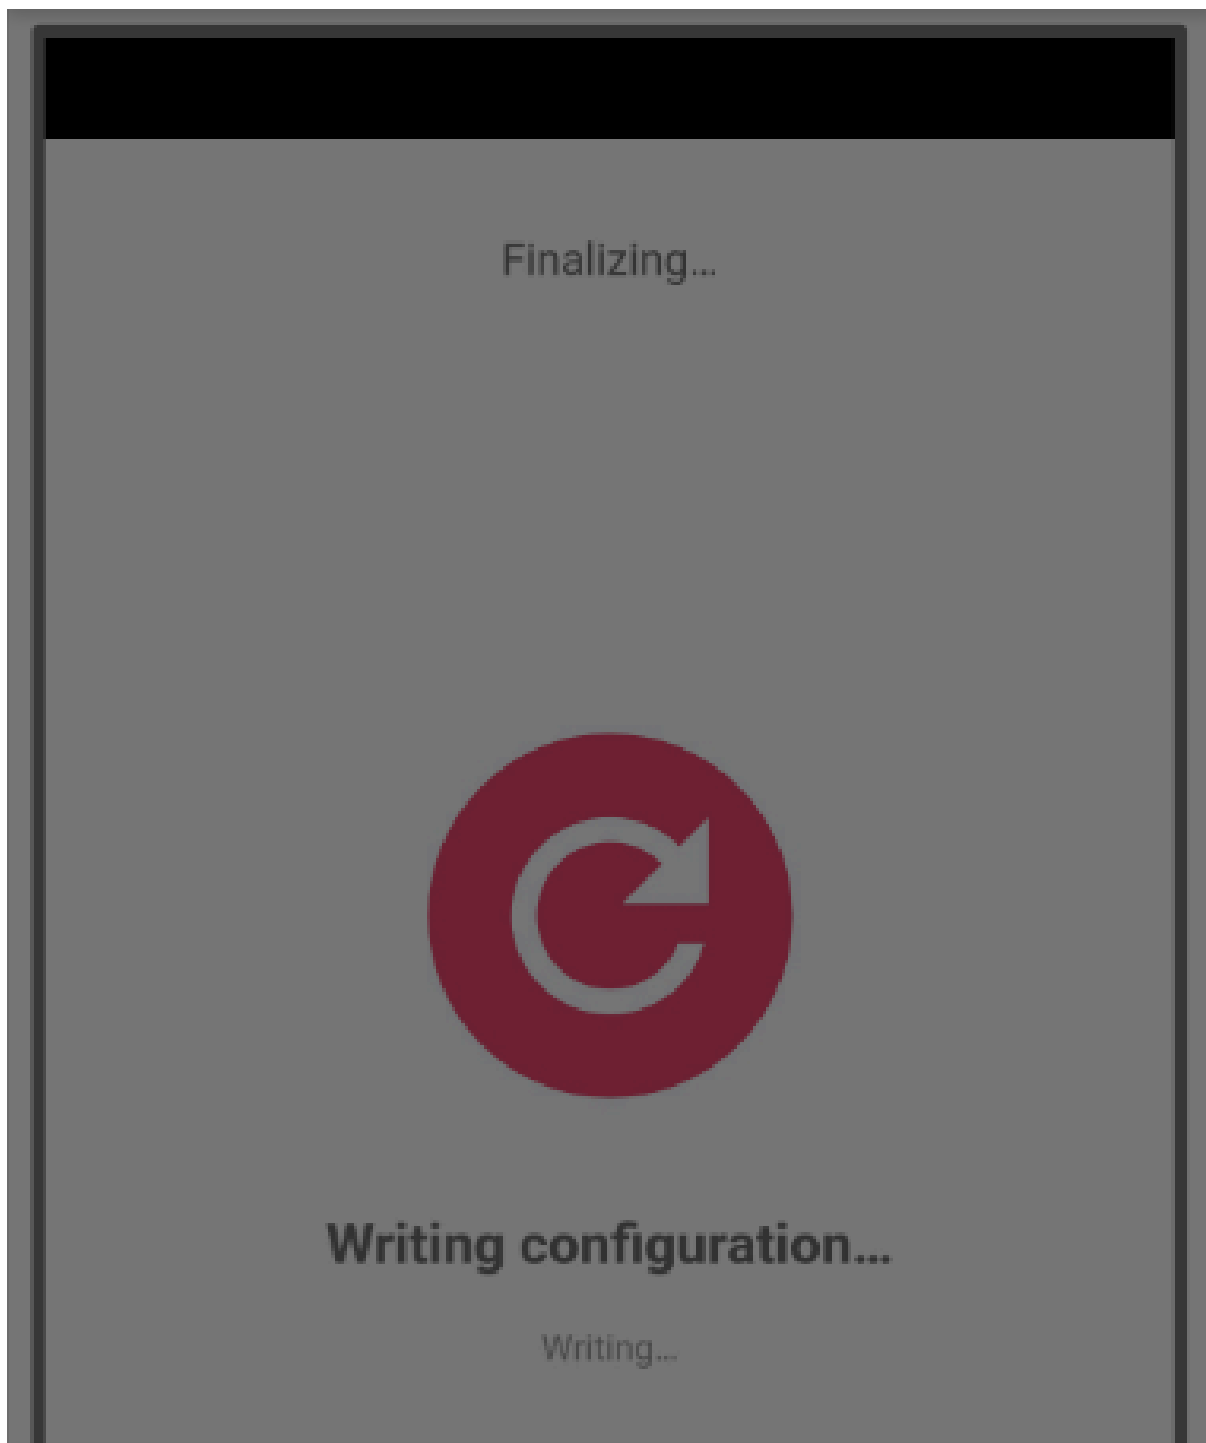

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Žingsnis 8. Paspauskite **Pridėti į Protegus2**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



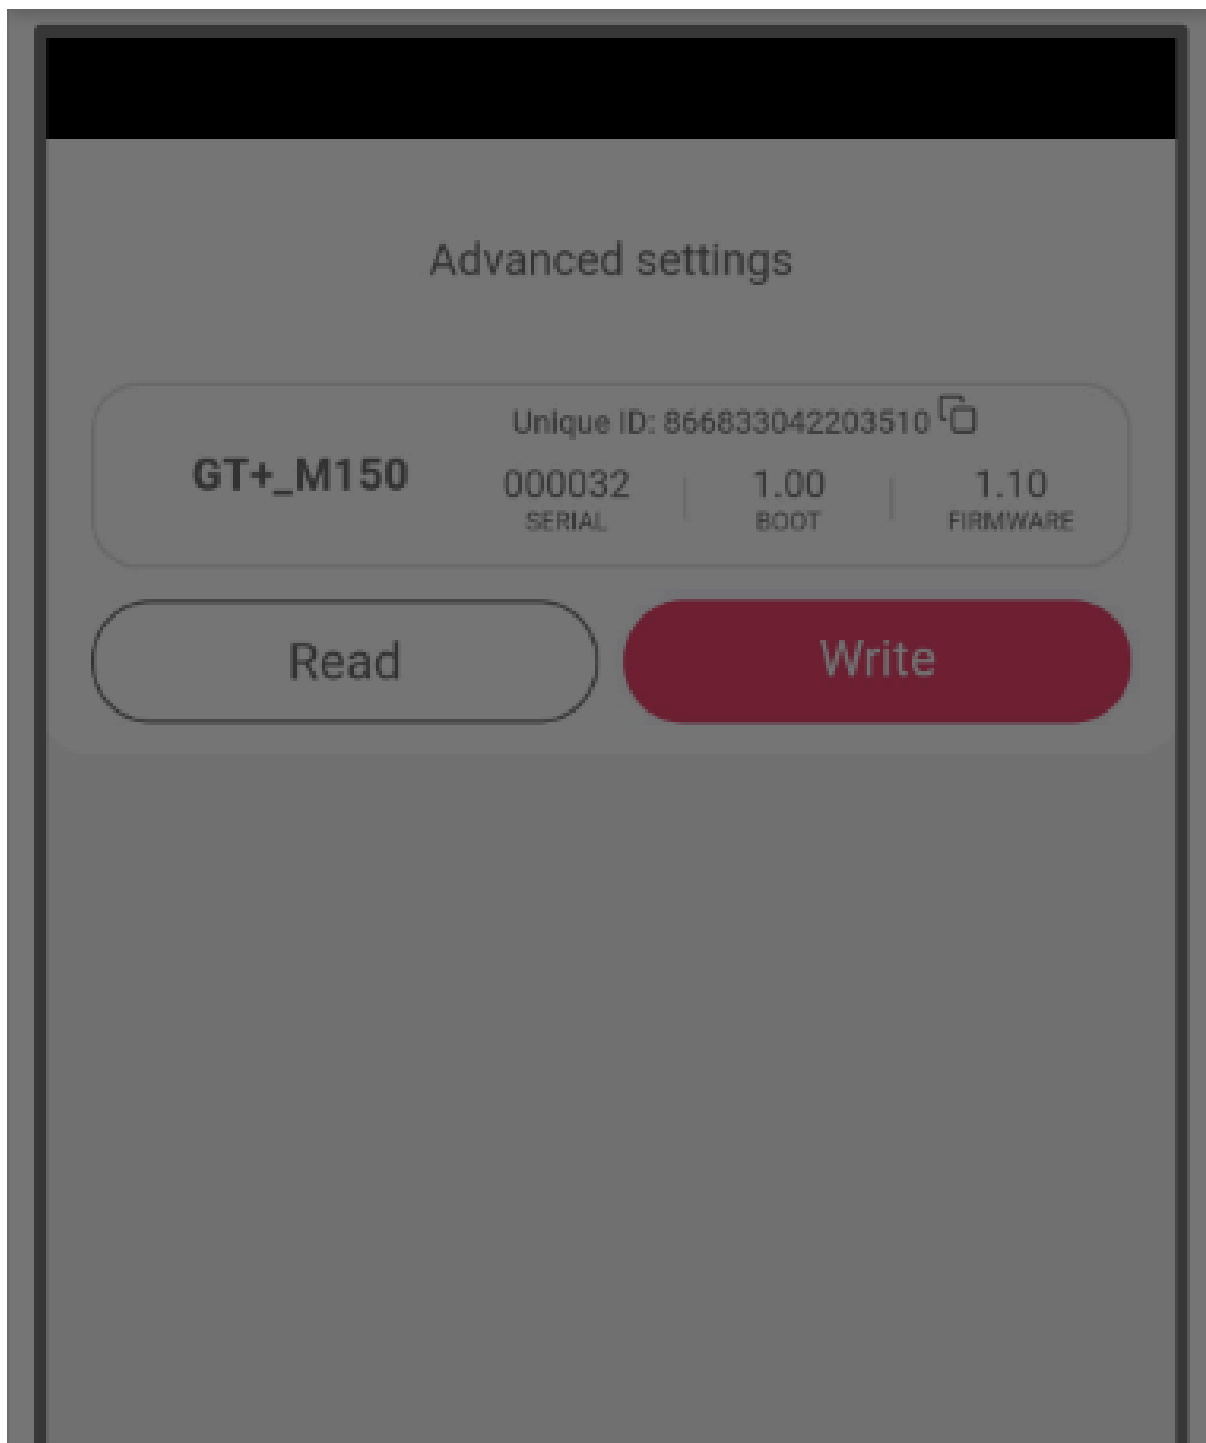

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Add to Protegus2

Finish

Žingsnis 9. Įveskite sistemos **Pavadinimą**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Add new system

Name
System 1

Background


Time zone
Europe/Vilnius

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 10. Paspauskite **Praleisti**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



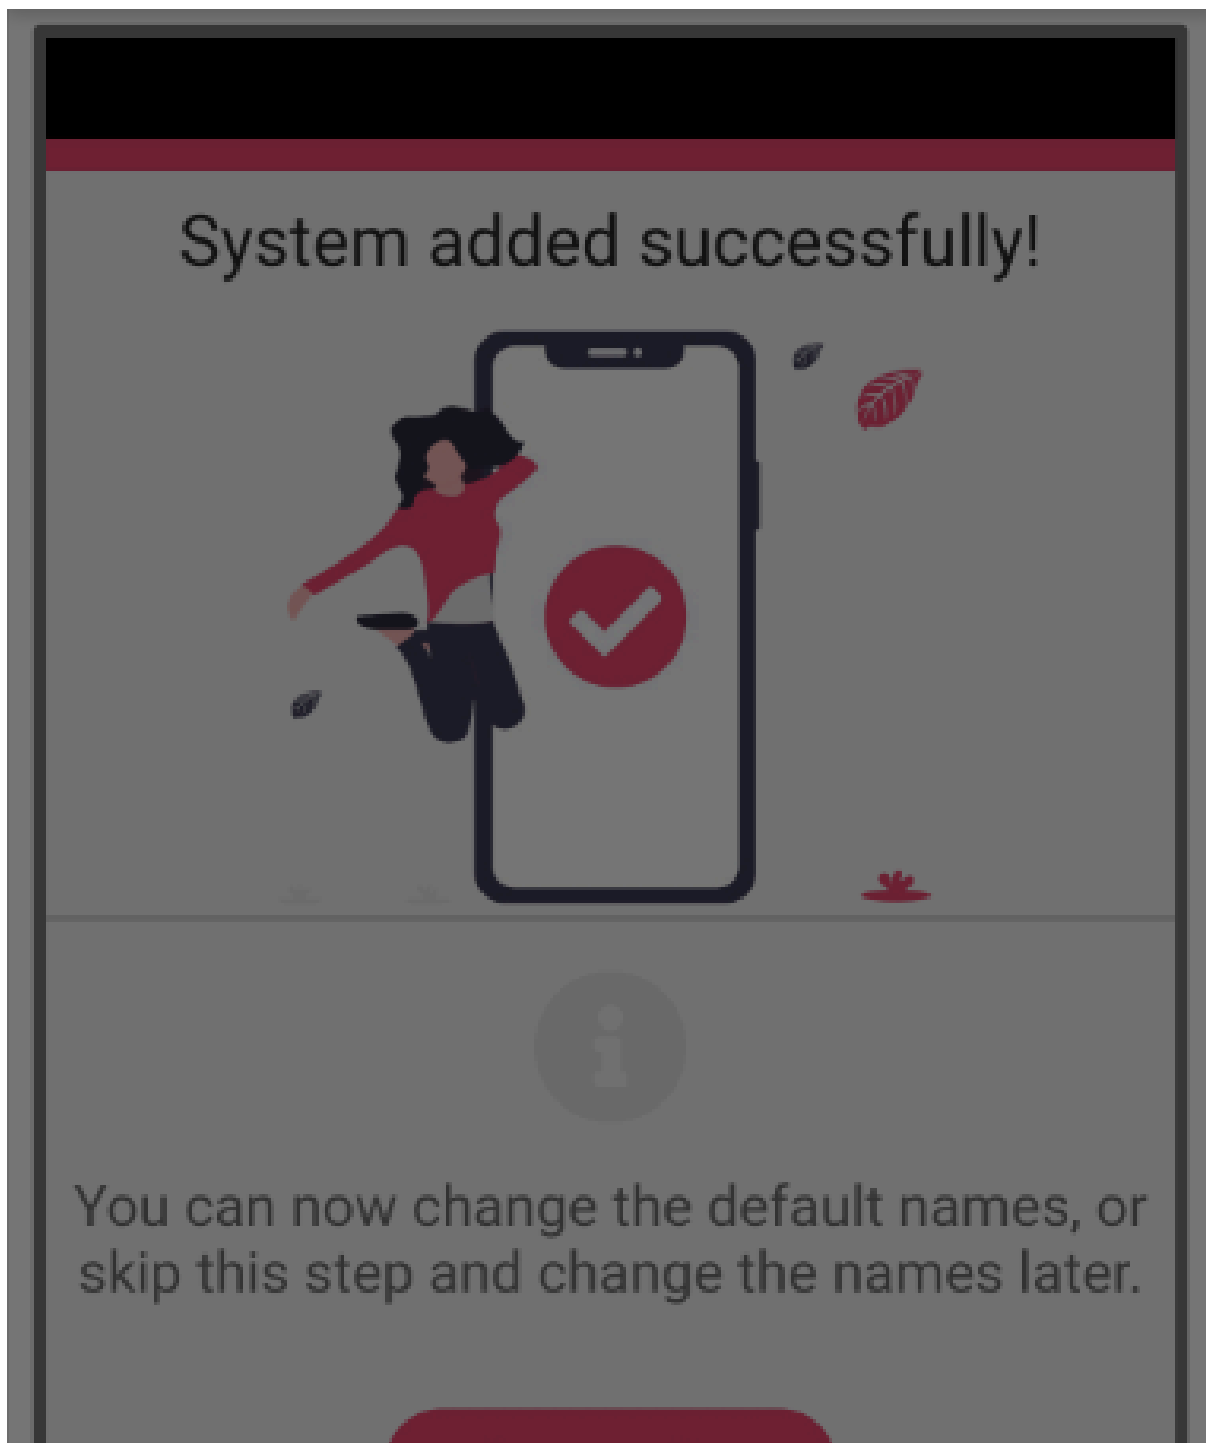


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 11. Paspauskite ant sistemos.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



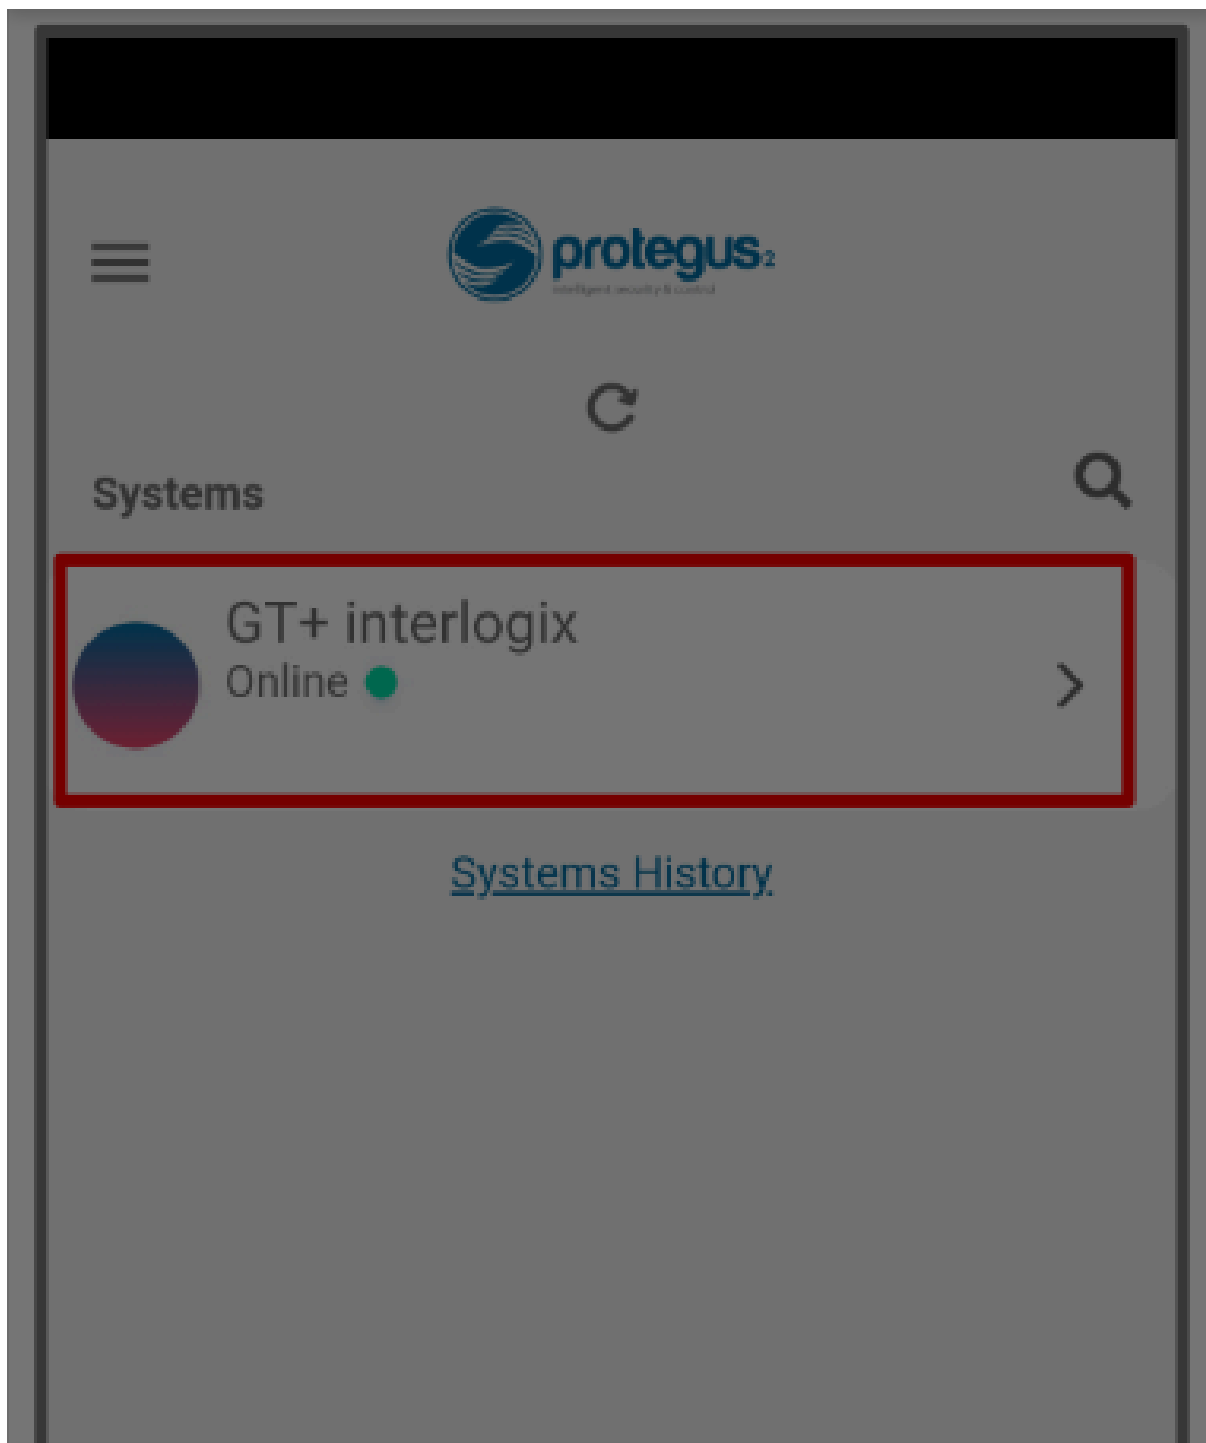

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 12. Palaukite 1 minutę, kol užbaigiama, ir paspauskite **Perduoti**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




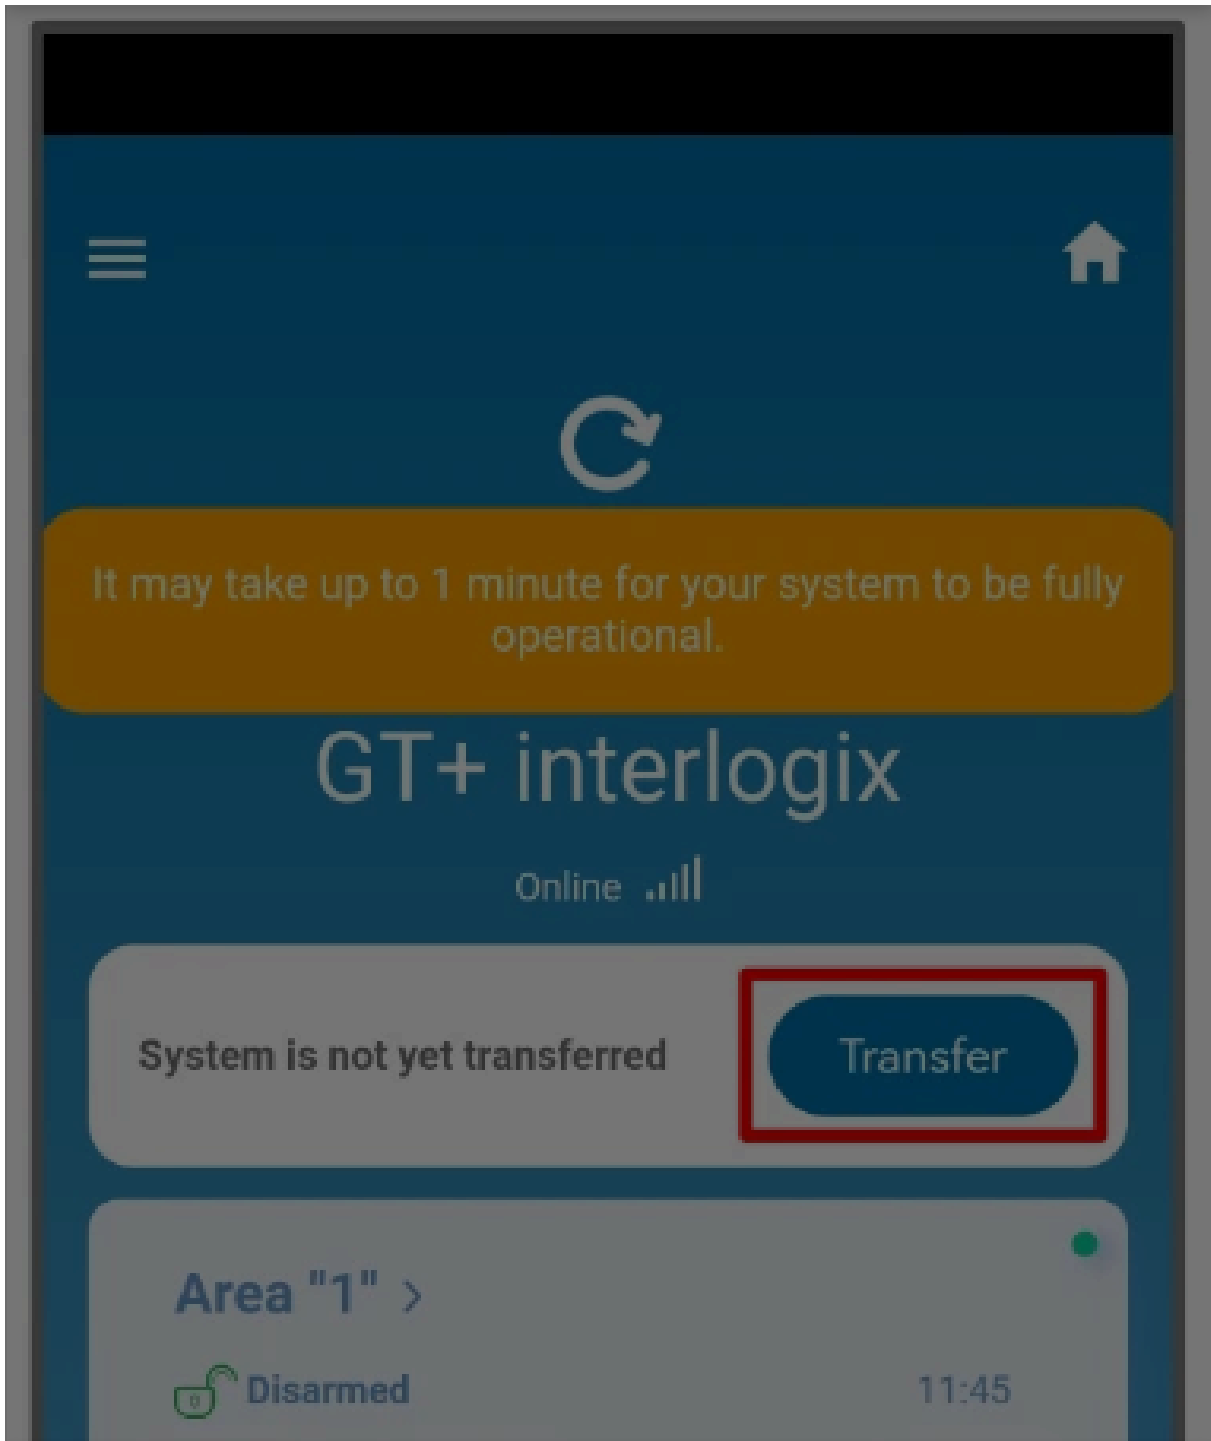

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

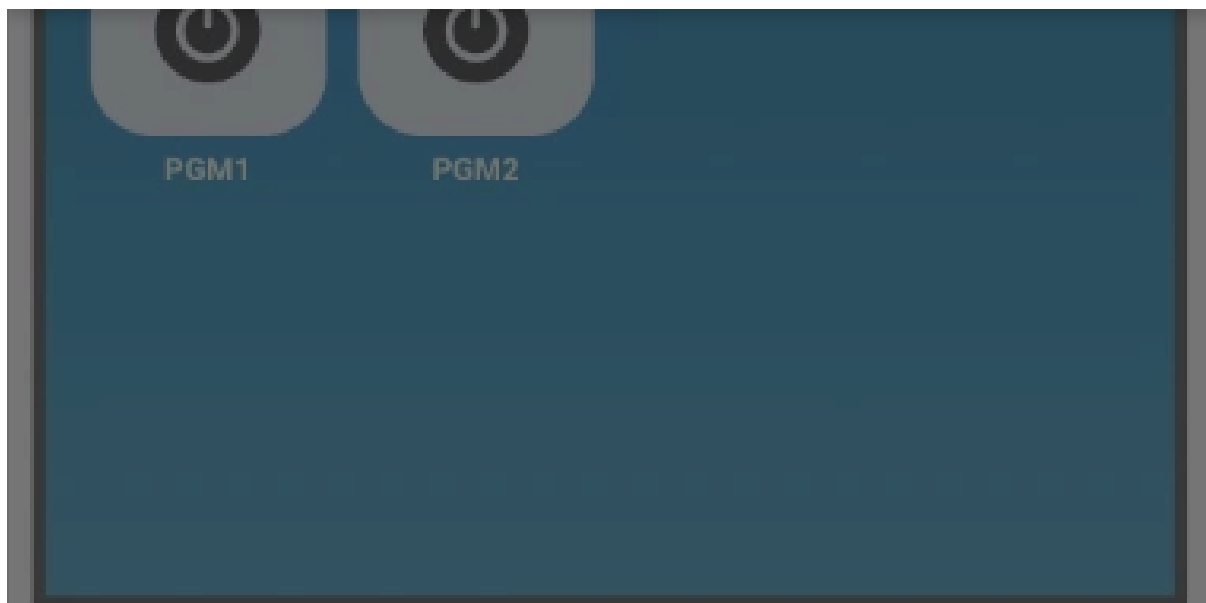


Žingsnis 13. Įveskite naudotojo el. paštą, kuriam montuotojas perduos sistemą.
Paspauskite **Perduoti**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



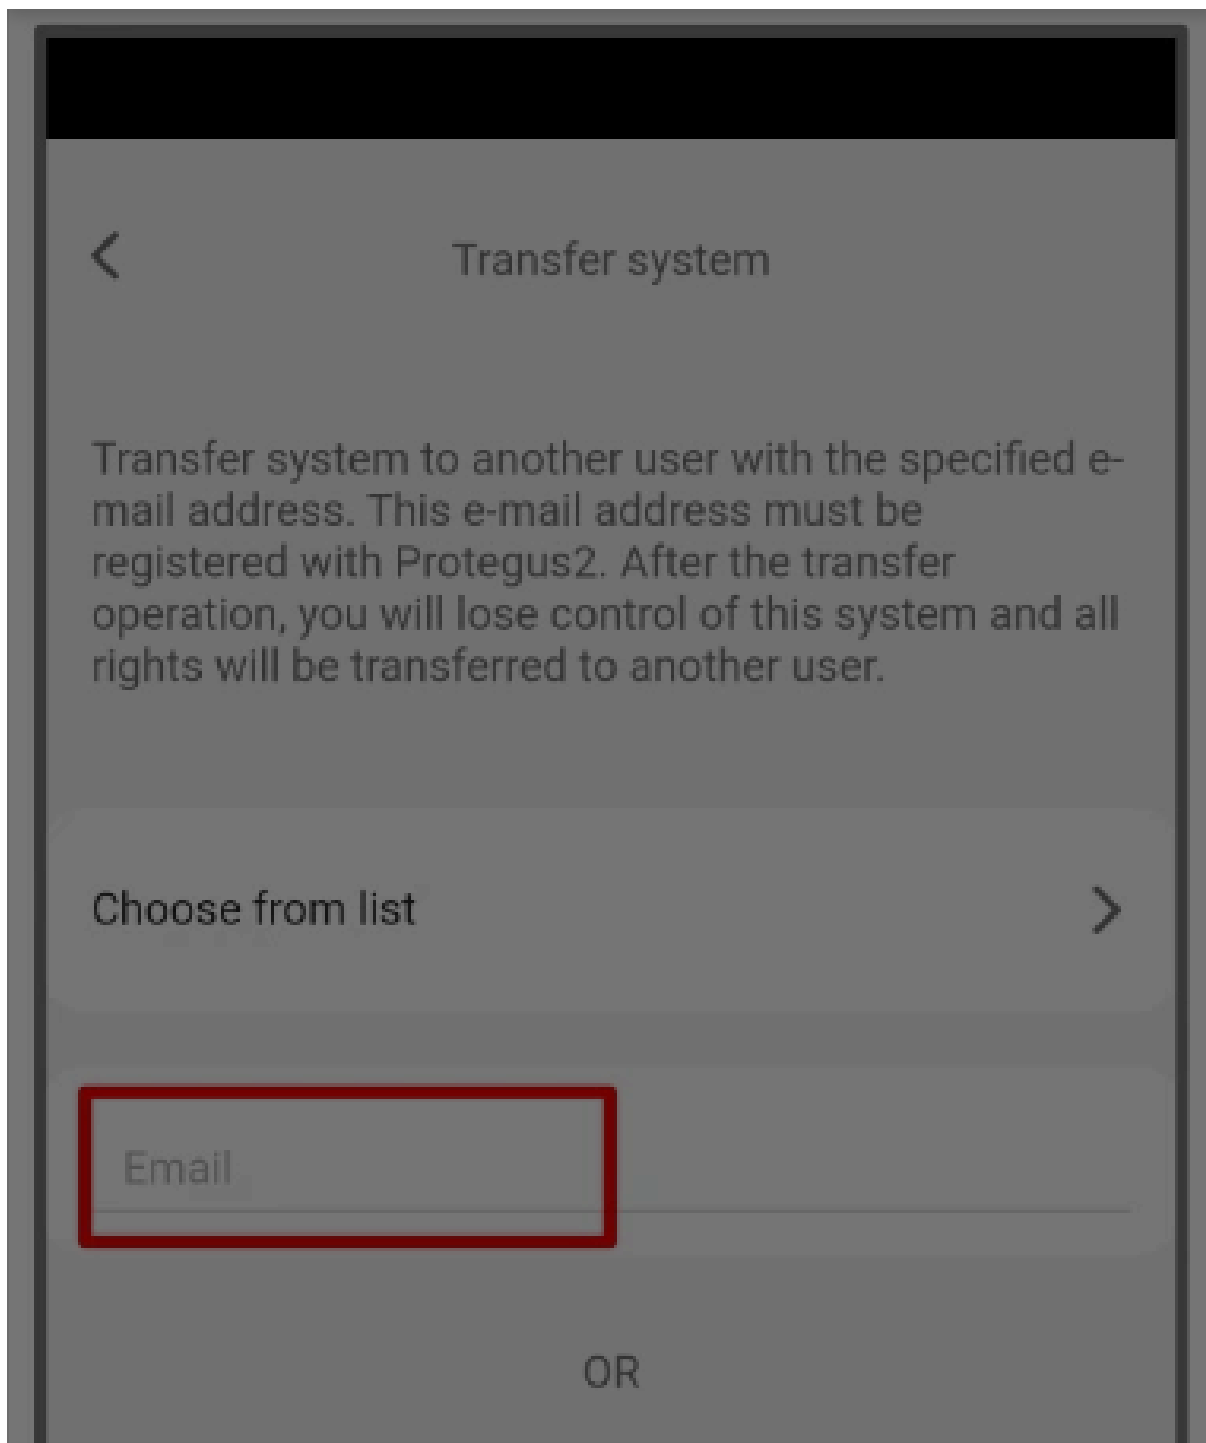

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Transfer


Žingsnis 14. Sistema atsiras Protegus naudotojo telefone.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



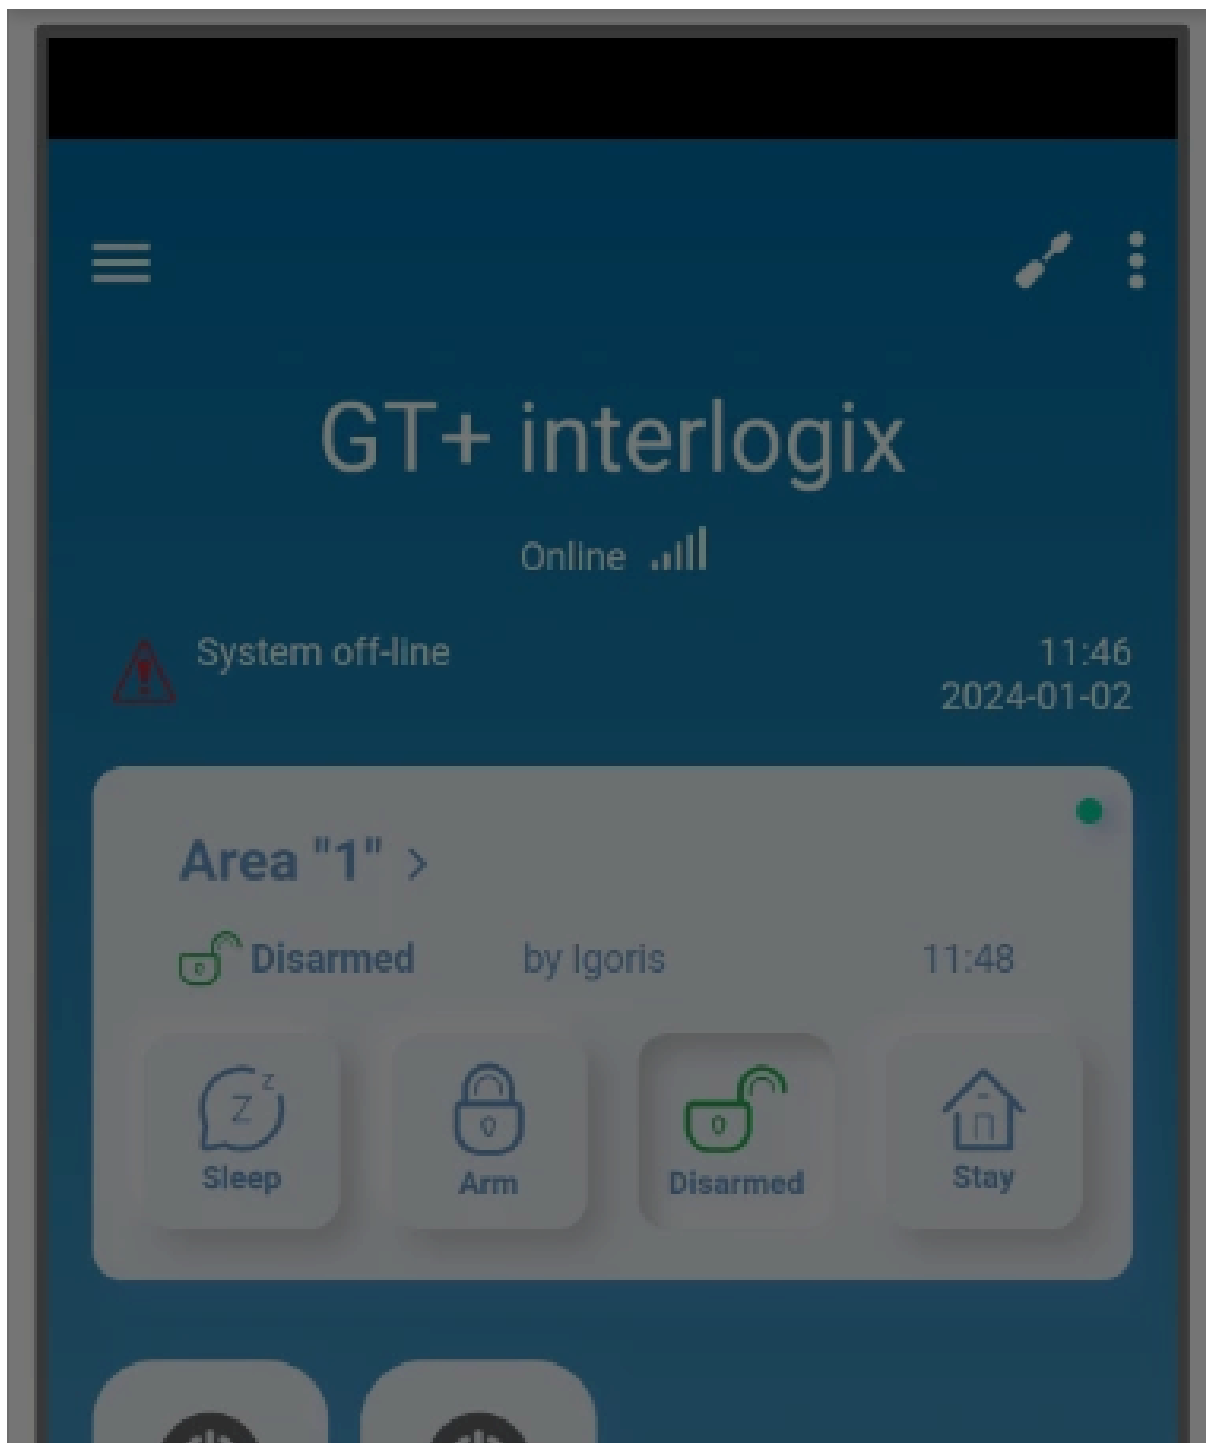

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





PATARIMAS

Baigę įrengimą ir nustatymus atlikite sistemos patikrą:

1. Sukurkite įvykį:
 - įjunkite/išjunkite sistemą centralės klaviatūra.
 - sukelkite zonos aliarmą, kai apsaugos sistema įjungta.
2. Įsitikinkite, kad įvykis pasiekia CMS (Central Monitoring Station) ir Protegus2 programėlę.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

