

COMMUNICATORS

Paradox SP(+)/MG(+) with GT/GT+/GET quick setup



GT product image

GT



GT+ product image

GT+



GET product image

GET

Short wiring and programming steps to connect the GT/GT+/GET communicator to Paradox SP/SP+/MG/MG+ panels using TIP/RING and KeyBus, then enroll the system in Protegus2. Use this alongside the full manuals for all other settings. (Terminal labels differ slightly between GT/GT+/GET, but the connections are the same.)



CAUTION

Install and service only by qualified personnel. Disconnect power before wiring. Unauthorized changes void warranty.

1. Prerequisites

- GT/GT+/GET firmware 1.21, SIM inserted, PIN disabled, data plan active.
- Paradox SP/SP+/MG/MG+ panel with keypad access (installer code available).
- CMS account number if reporting to CMS.
- Protegus2 company/installer account and communicator IMEI.

2. Wiring

Cookie consent


We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.



Google Analytics

Accept

Reject

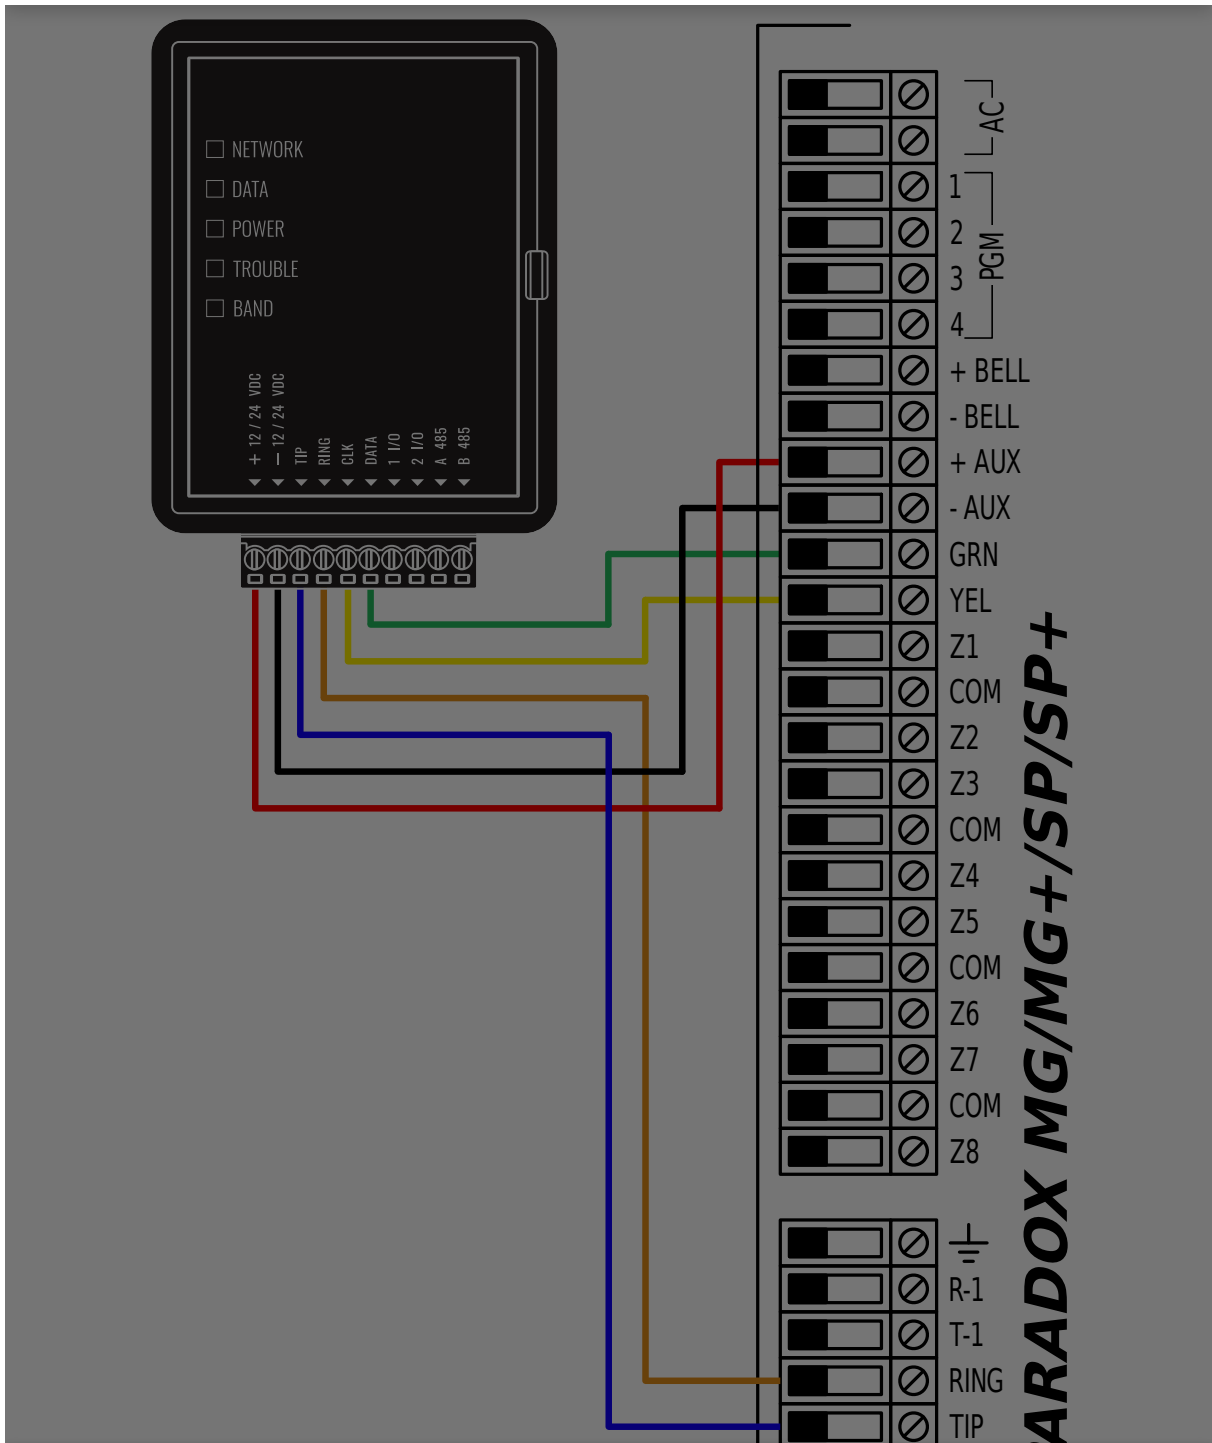

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics






3. Section 811: enter Partition 1 account number (placeholder example: 1111 ; use your CMS-provided value).
4. Section 812: enter Partition 2 account number (placeholder example: 2222 ; use your CMS-provided value).
5. Section 815: enter phone number for reporting (placeholder example: 123456 ; use your CMS-provided value).
6. Section 911: set PC password (placeholder example: 1234 ; set per your policy).
7. Press [CLEAR] to exit programming.

Refer to the full Paradox manual if your keypad codes differ.

4. Add system to Protegus2 (mobile or web)

Step 1. Tap Add new system.

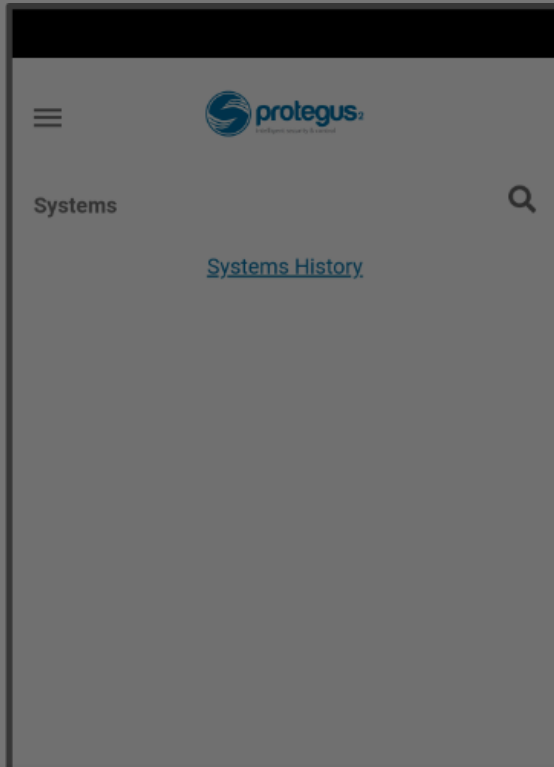


Step 2. Enter the communicator IMEI, tap Next.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



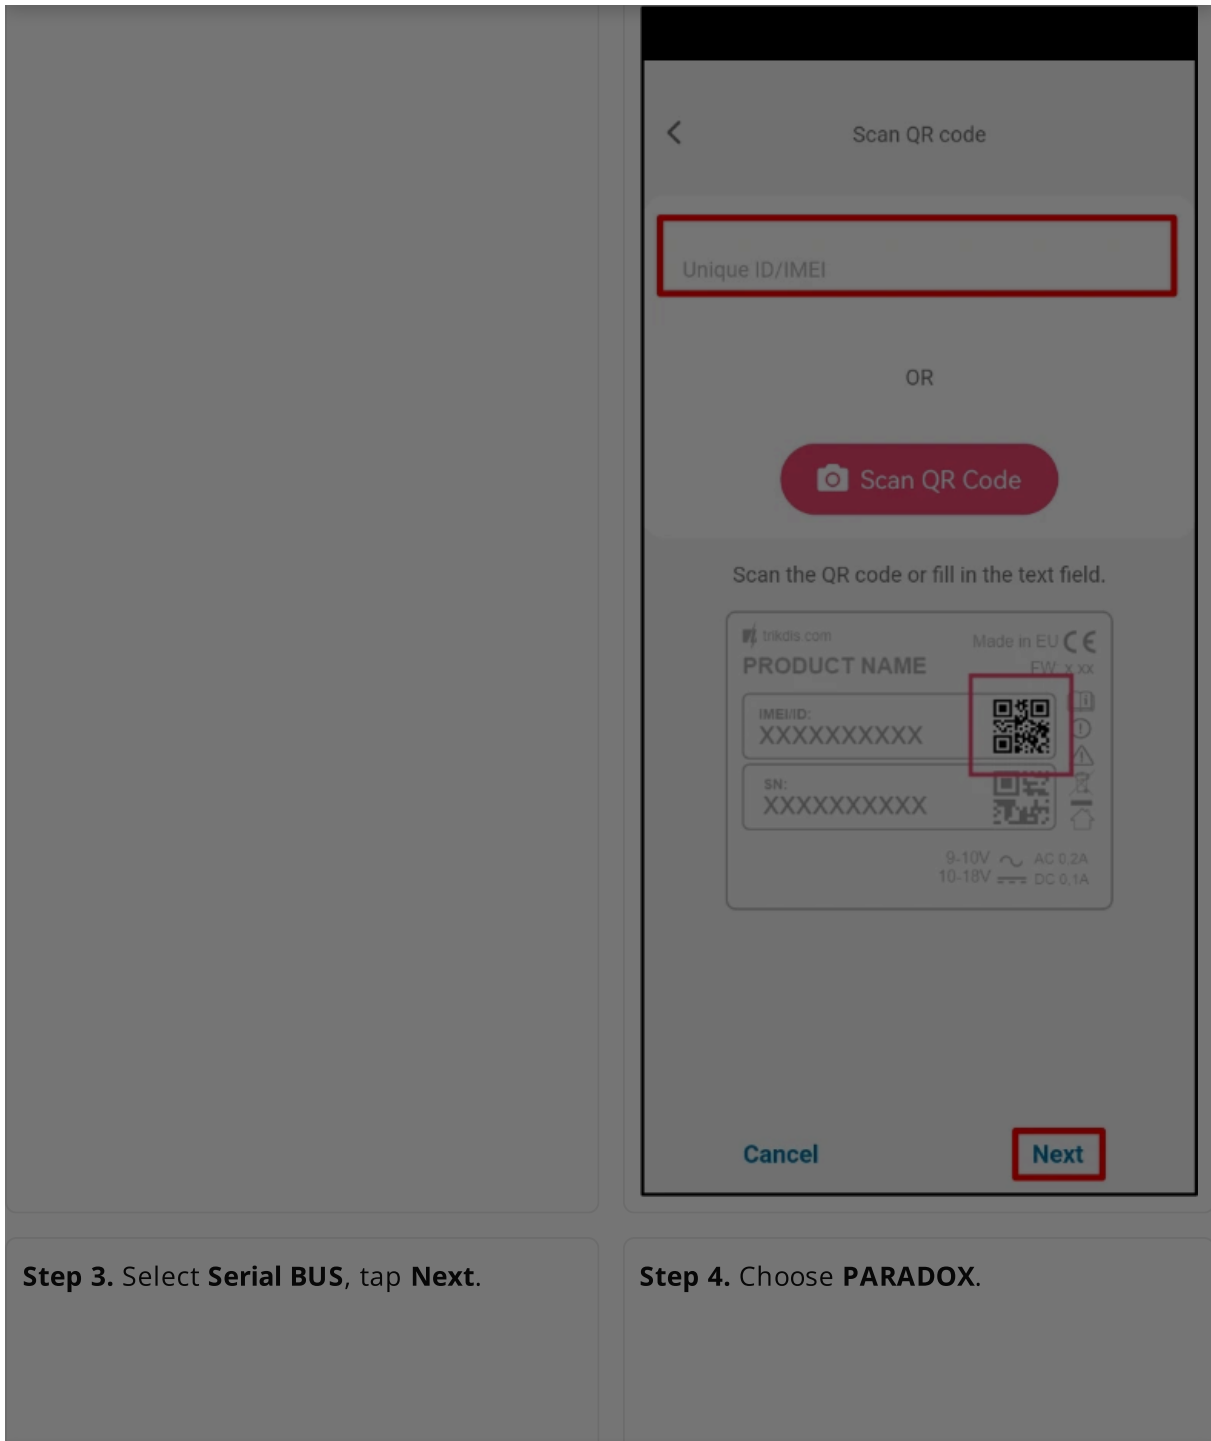

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics



The image displays two sequential steps in a mobile application's setup process. Both screens are titled 'Select panel' and feature a list of panel options. In the first screenshot, 'Serial BUS' is selected, and the 'Next' button is highlighted. In the second screenshot, 'PARADOX' is selected, and the 'Next' button is highlighted. The 'Next' button in the second screenshot is highlighted with a red box.

Step 5. Choose **PARADOX SP+/MG+ series KeyBus**.

Step 6. Enter **Primary Object ID**, tap **Next**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Step 7. Wait while data is written.



Step 8. Tap **Next**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



 <p>Writing data to the device</p> <ul style="list-style-type: none"> Connection succeeded ✓ Preparation succeeded ✓ Writing... ⌚ Restart Connect <p>Cancel</p>	 <p>Configuration successful</p> <ul style="list-style-type: none"> Connection succeeded ✓ Preparation succeeded ✓ Write successful ✓ Restarted ✓ Connection succeeded ✓ <p>Next</p>
<p>Step 9. Enter system Name, tap Next.</p>	<p>Step 10. Tap Skip (if you do not add users now).</p>

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



Step 11. Wait ~1 minute for completion.


Step 12. Setup finished.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



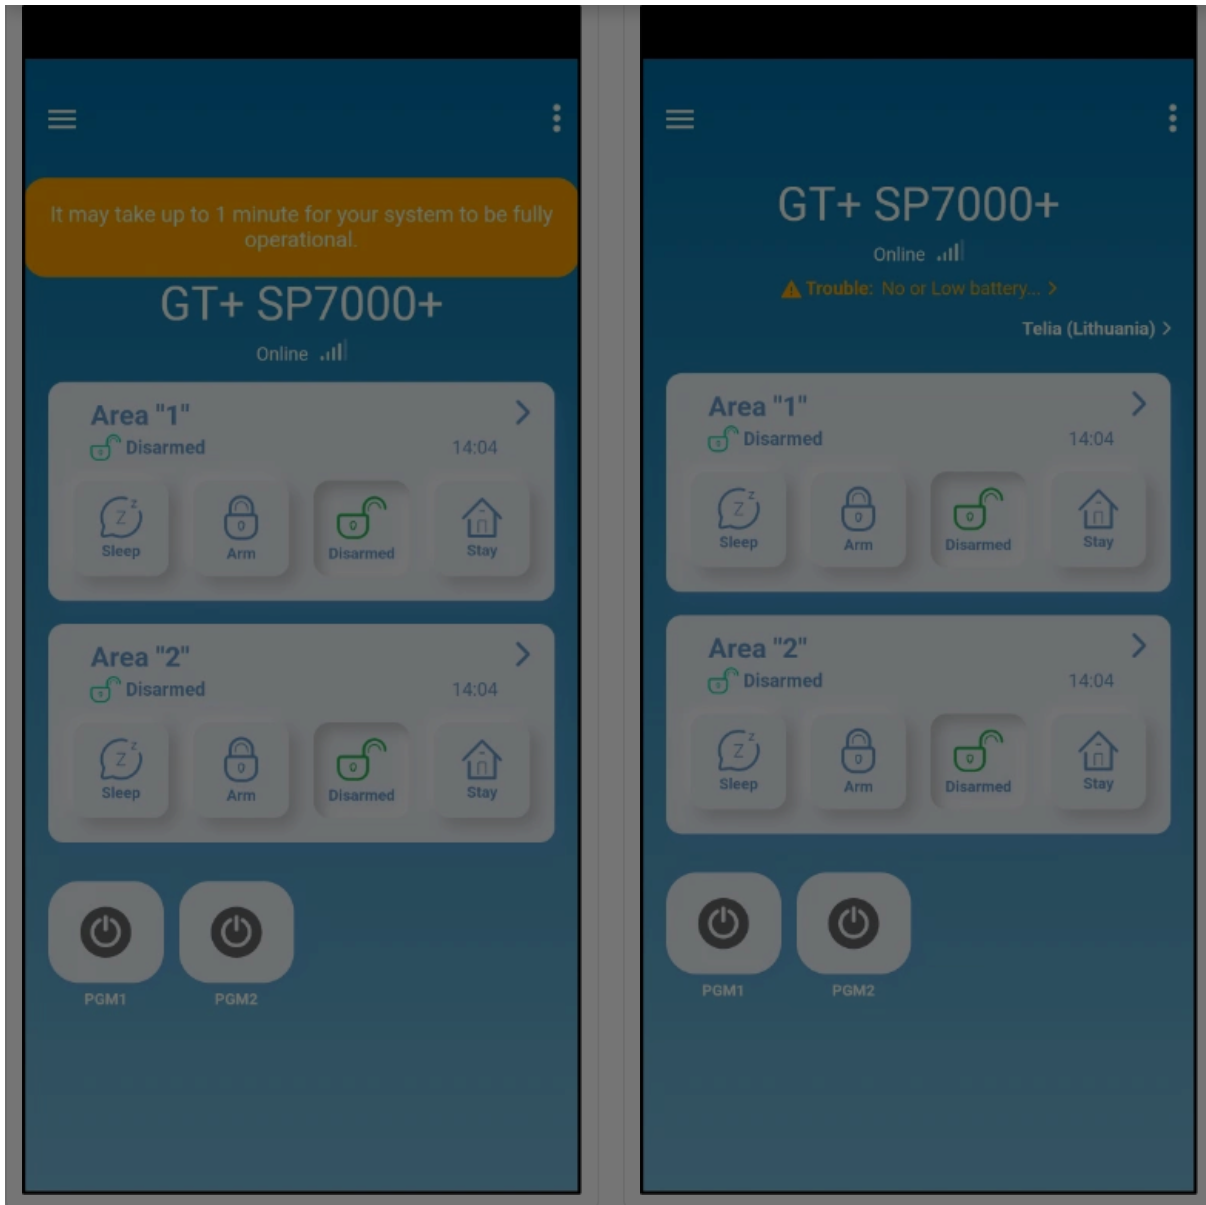

TIP

If Protegus2 cannot finish writing data, verify the KeyBus wiring (YEI/GRN), IMEI entry, and that CMS/Contact ID settings are saved on the panel.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics

