

COMUNICADORES

Paradox SP(+)/MG(+) con GT/GT+/GET configuración rápida



Pasos breves de cableado y programación para conectar el comunicador GT/GT+/GET a paneles Paradox SP/SP+/MG/MG+ usando TIP/RING y KeyBus, y luego añadir el sistema a Protegus2. Use esto junto con los manuales completos para otros ajustes. (Las etiquetas de terminal pueden variar ligeramente entre GT/GT+/GET, pero las conexiones son las mismas.)

 **PRECAUCIÓN**

La instalación y el servicio deben ser realizados solo por personal cualificado. Desconecte la alimentación antes de cablear. Los cambios no autorizados anulan la garantía.

1. Requisitos

1. Firmware GT/GT+/GET 1.21, SIM insertada, PIN deshabilitado, plan de datos activo.
2. Panel Paradox SP/SP+/MG/MG+ con acceso al teclado (código de instalador disponible).
3. Número de cuenta CMS si reporta a CMS.
4. Cuenta de empresa/instalador de Protegus2 y IMEI del comunicador.

2. Cableado


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

Accept

Reject

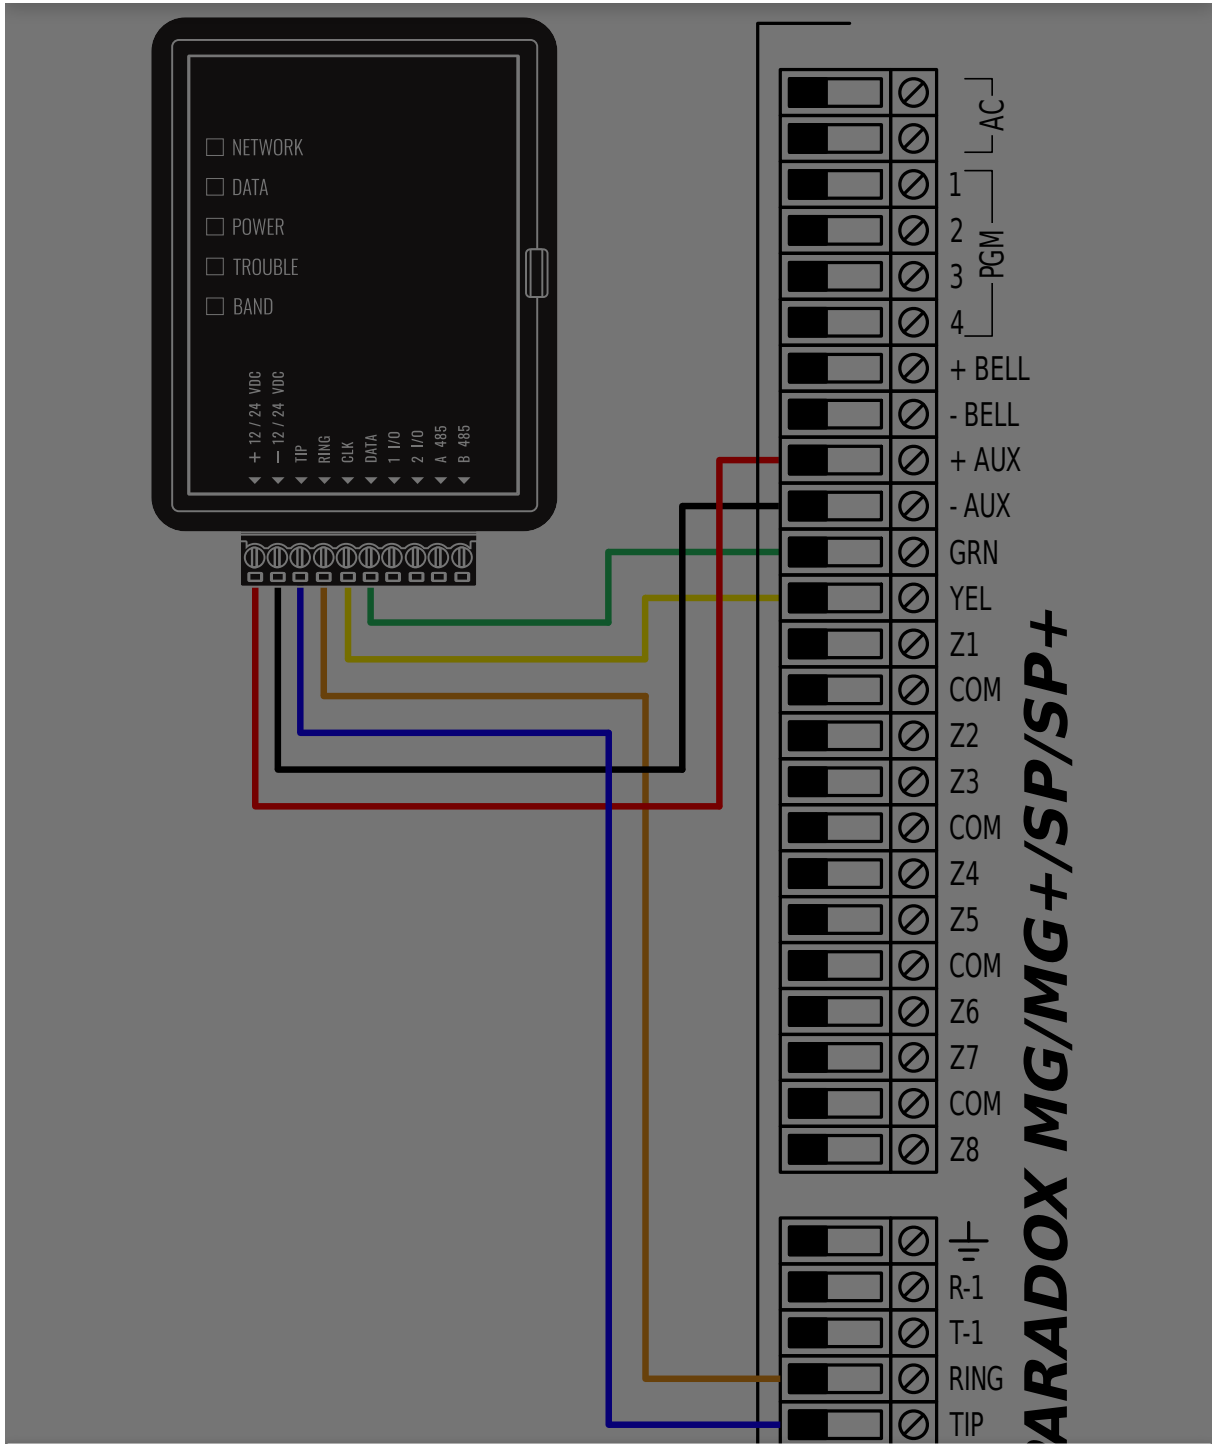

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics





2. Sección 801: opciones generales del marcador → deje los valores predeterminados salvo que se requiera.
3. Sección 811: introduzca el número de cuenta de la Partición 1 (ejemplo 1111 ; use el valor de su CMS).
4. Sección 812: introduzca el número de cuenta de la Partición 2 (ejemplo 2222 ; use el valor de su CMS).
5. Sección 815: introduzca el número de teléfono de reporte (ejemplo 123456 ; use el valor de su CMS).
6. Sección 911: configure la contraseña de PC (ejemplo 1234 ; según su política).
7. Presione [CLEAR] para salir de la programación.

Consulte el manual completo de Paradox si los códigos del teclado son diferentes.

4. Añadir sistema a Protegus2 (móvil o web)

Paso 1. Pulse **Agregar nuevo sistema.**

Paso 2. Introduzca el **IMEI** del comunicador, pulse **Siguiente.**

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Paso 3. Seleccione **TIP RING**, pulse **Siguiente**.

Paso 4. Pulse **Atrás**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



Paso 5. Seleccione **Serial BUS**, pulse **Siguiente**.

Paso 6. Seleccione **PARADOX**.



Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



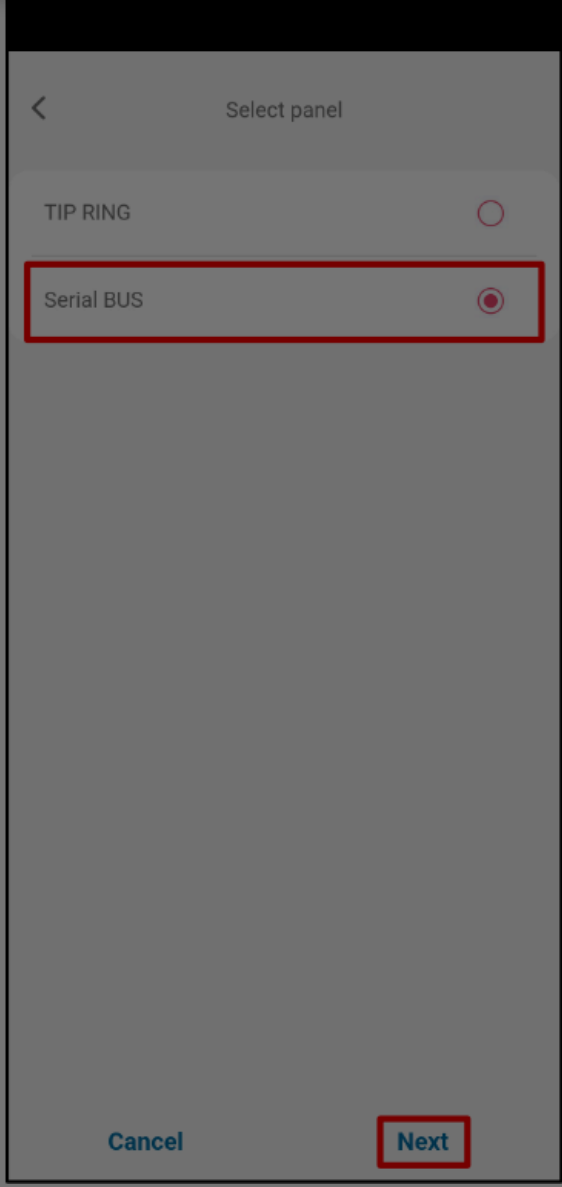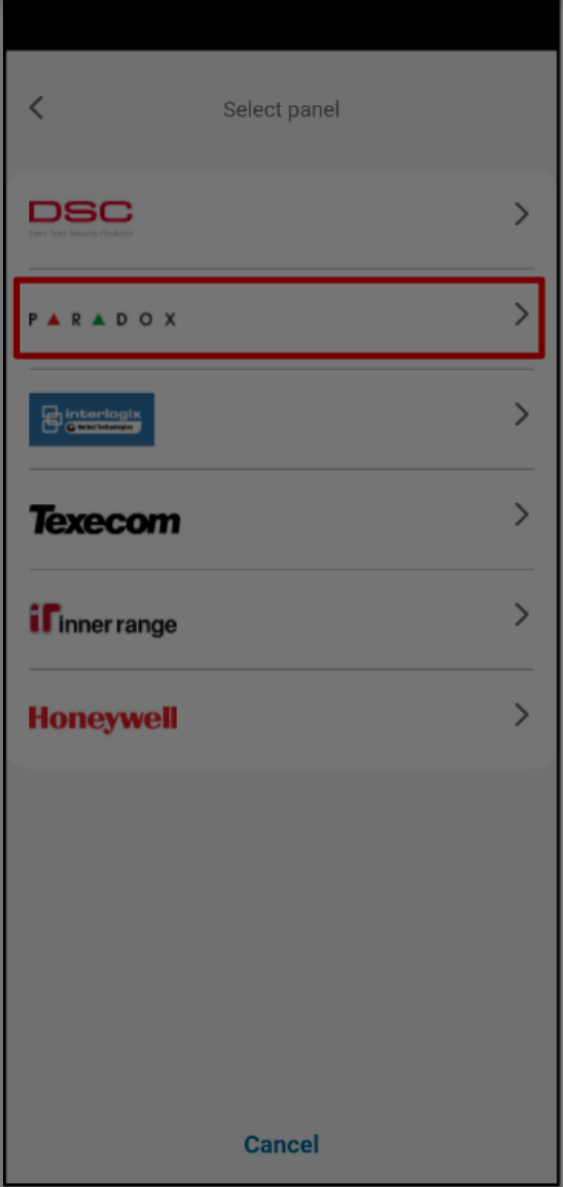

	
<p>Paso 7. Seleccione PARADOX SP+/MG+ series KeyBus.</p>	<p>Paso 8. Introduzca Primary Object ID, pulse Siguiente.</p>

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



Paso 9. Espere mientras se escriben los datos.



Paso 10. Pulse **Siguiente**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





 <p>Writing data to the device</p> <ul style="list-style-type: none"> Connection succeeded ✓ Preparation succeeded ✓ Writing... ⌛ Restart Connect <p>Cancel</p>	 <p>Configuration successful</p> <ul style="list-style-type: none"> Connection succeeded ✓ Preparation succeeded ✓ Write successful ✓ Restarted ✓ Connection succeeded ✓ <p>Next</p>
<p>Paso 11. Introduzca el Nombre del sistema, pulse Siguiente.</p>	<p>Paso 12. Pulse Saltar (si no añade usuarios ahora).</p>

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

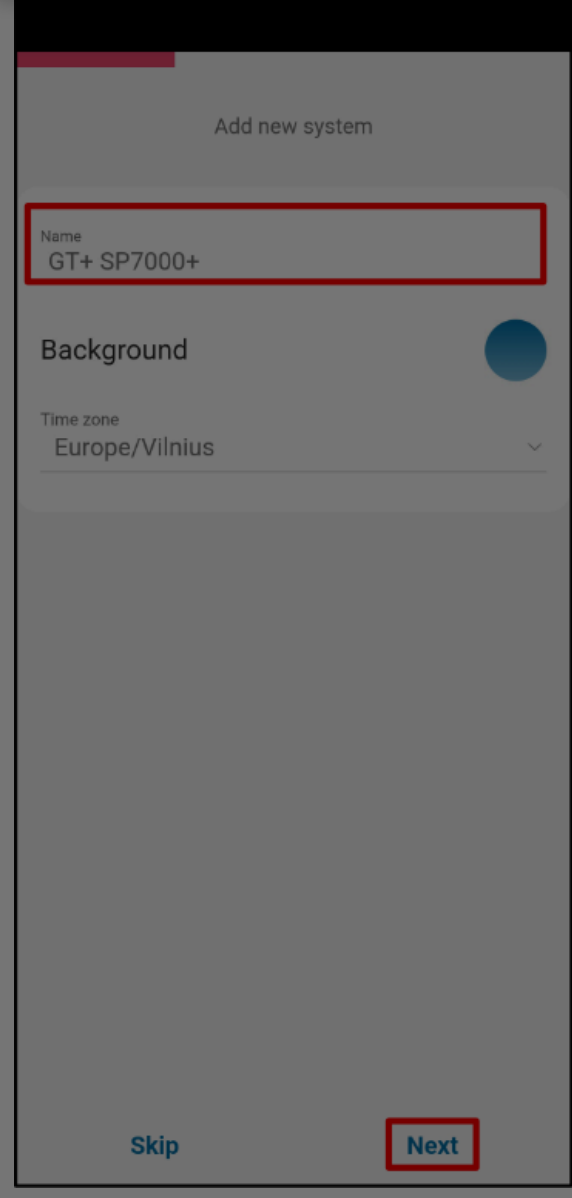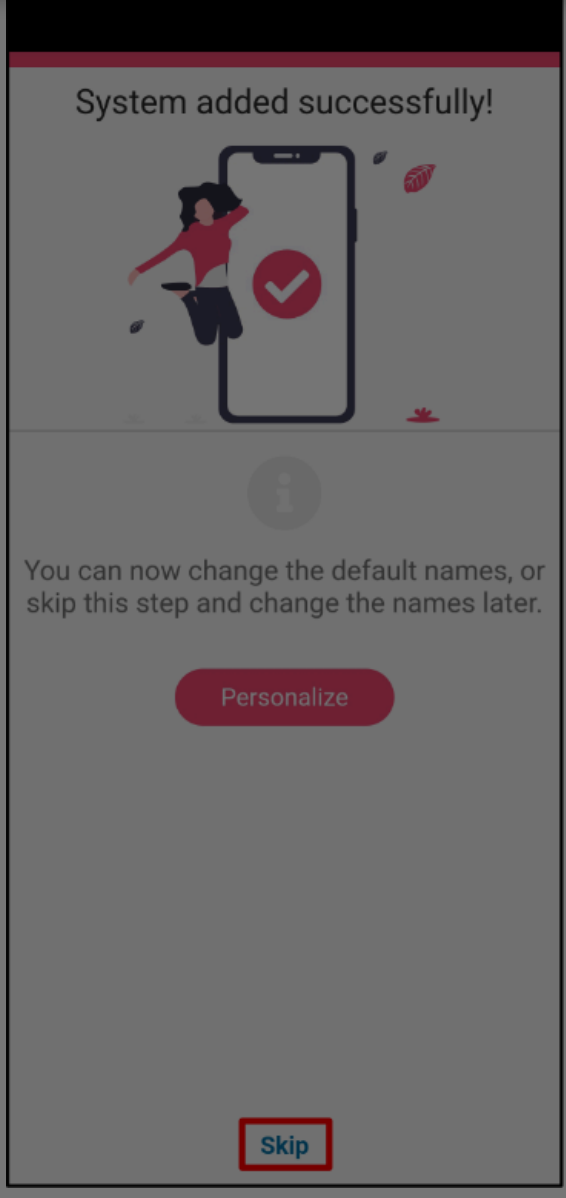

 <p>Add new system</p> <p>Name GT+ SP7000+</p> <p>Background</p> <p>Time zone Europe/Vilnius</p> <p>Skip Next</p>	 <p>System added successfully!</p> <p>You can now change the default names, or skip this step and change the names later.</p> <p>Personalize</p> <p>Skip</p>
<p>Paso 13. Espere ~1 minuto para completar.</p>	<p>Paso 14. Configuración finalizada.</p>

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



CONSEJO

Si Protegus2 no puede finalizar la escritura de datos, verifique el cableado KeyBus (YEL/GRN), la entrada de IMEI y que la configuración de CMS/Contact ID esté guardada en el panel.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics