

KOMUNIKATORIAI

Paradox SP(+)/MG(+) su GT/GT+/GET greitas paruošimas



GT product
image

GT



GT+ product
image

GT+



GET product
image

GET

Trumpi pajungimo ir programavimo žingsniai, skirti prijungti GT/GT+/GET komunikatorių prie Paradox SP/SP+/MG/MG+ centralės naudojant TIP/RING ir KeyBus, tada pridėti sistemą į Protegus2. Naudokite kartu su pilnais vadovais kitiems nustatymams. (Gnybtų pavadinimai GT/GT+/GET gali nežymiai skirtis, tačiau jungtys yra tokios pačios.)



ATSARGIAI

Montavimą ir aptarnavimą gali atlikti tik kvalifikuoti specialistai. Prieš jungdami laidus atjunkite maitinimą. Neautorizuoti pakeitimai panaikina garantiją.

1. Reikalavimai

1. GT/GT+/GET programinės įrangos versija 1.21, įdėta SIM kortelė, PIN išjungtas, aktyvus duomenų planas.
2. Paradox SP/SP+/MG/MG+ centralė su klaviatūros prieiga (yra montuotojo kodas).
3. CMS paskyros numeris, jei pranešimai siunčiami į CMS.
4. Protegus2 įmonės/montuotojo paskyra ir komunikatoriaus IMEI.

Cookie consent


We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.



Google Analytics

Accept

Reject

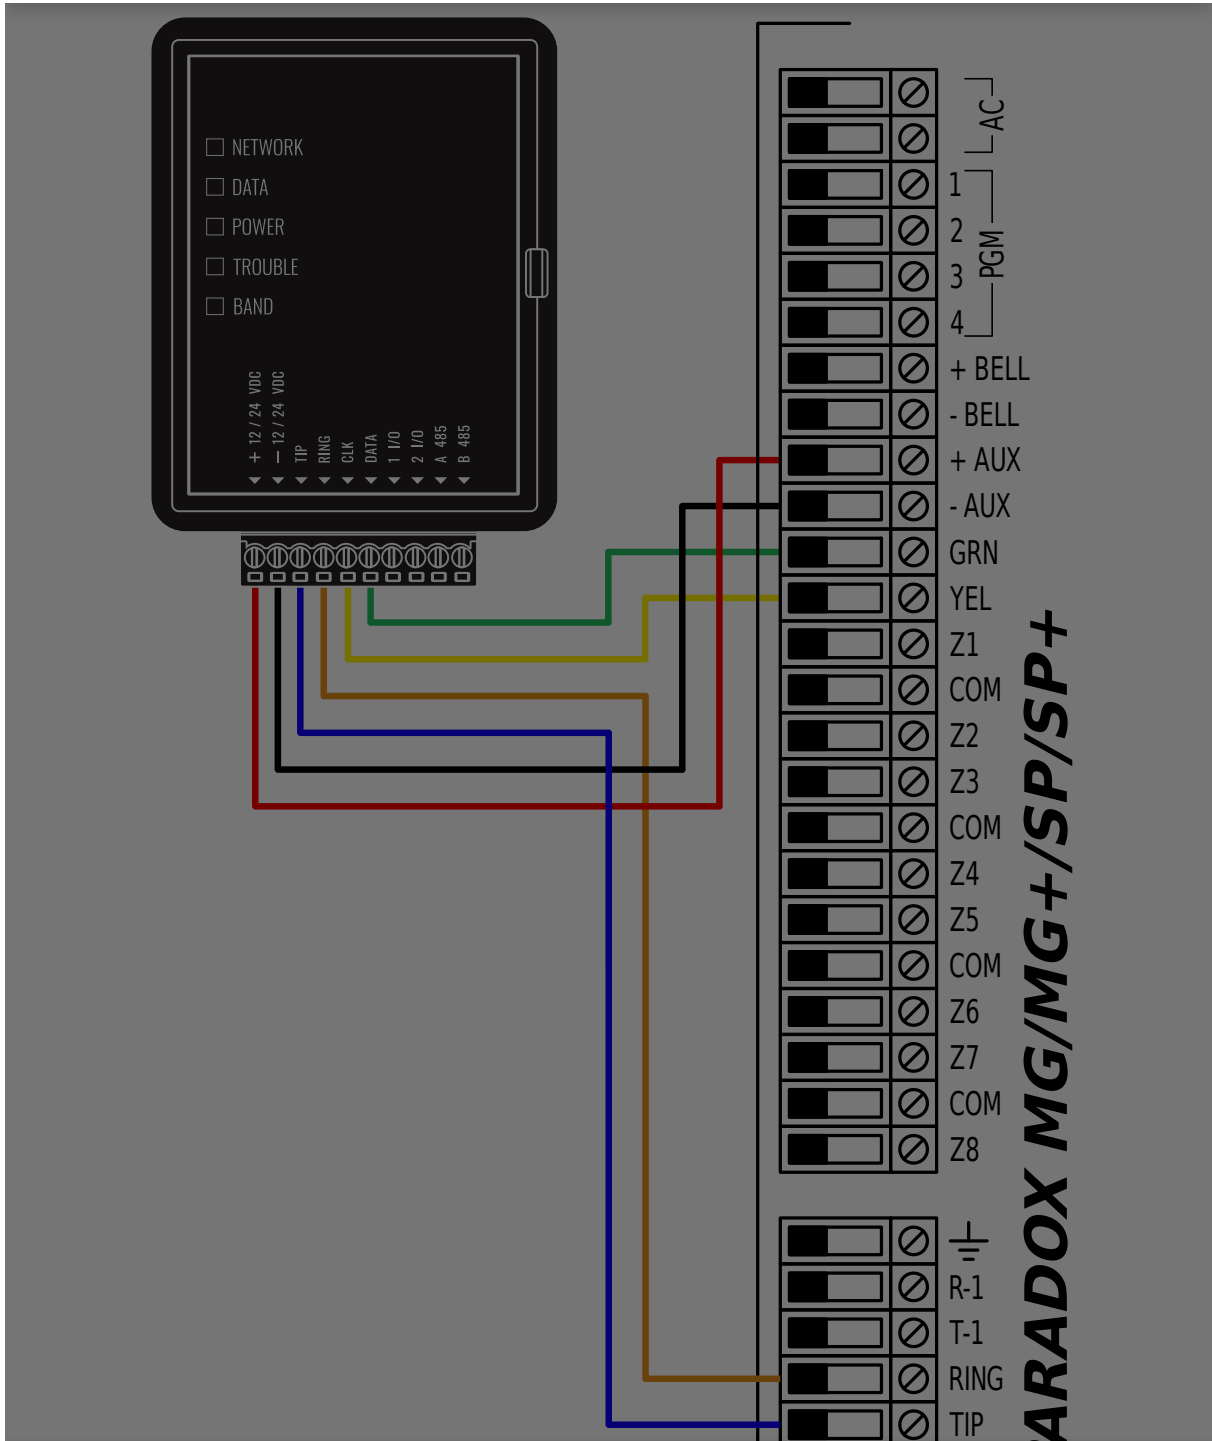

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics





- Skiltis 801: bendros telefoninės linijos parinktys → palikite numatytas, jei nereikia keisti.
- Skiltis 811: įveskite 1 skaidinio paskyros numerį (pavyzdys 1111 ; naudokite savo CMS reikšmę).
- Skiltis 812: įveskite 2 skaidinio paskyros numerį (pavyzdys 2222 ; naudokite savo CMS reikšmę).
- Skiltis 815: įveskite telefono numerį pranešimams (pavyzdys 123456 ; naudokite savo CMS reikšmę).
- Skiltis 911: nustatykite PC slaptažodį (pavyzdys 1234 ; nustatykite pagal politiką).
- Paspauskite [CLEAR] , kad išeitumėte iš programavimo.

Jei jūsų klaviatūros kodai skiriasi, vadovaukitės pilnu Paradox vadovu.

4. Sistemos pridėjimas į Protegus2 (mobiliajame įrenginyje arba naršyklėje)


Žingsnis 1. Paspauskite **Pridėti naują sistemą**.

Žingsnis 2. Įveskite komunikatoriaus **IMEI**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

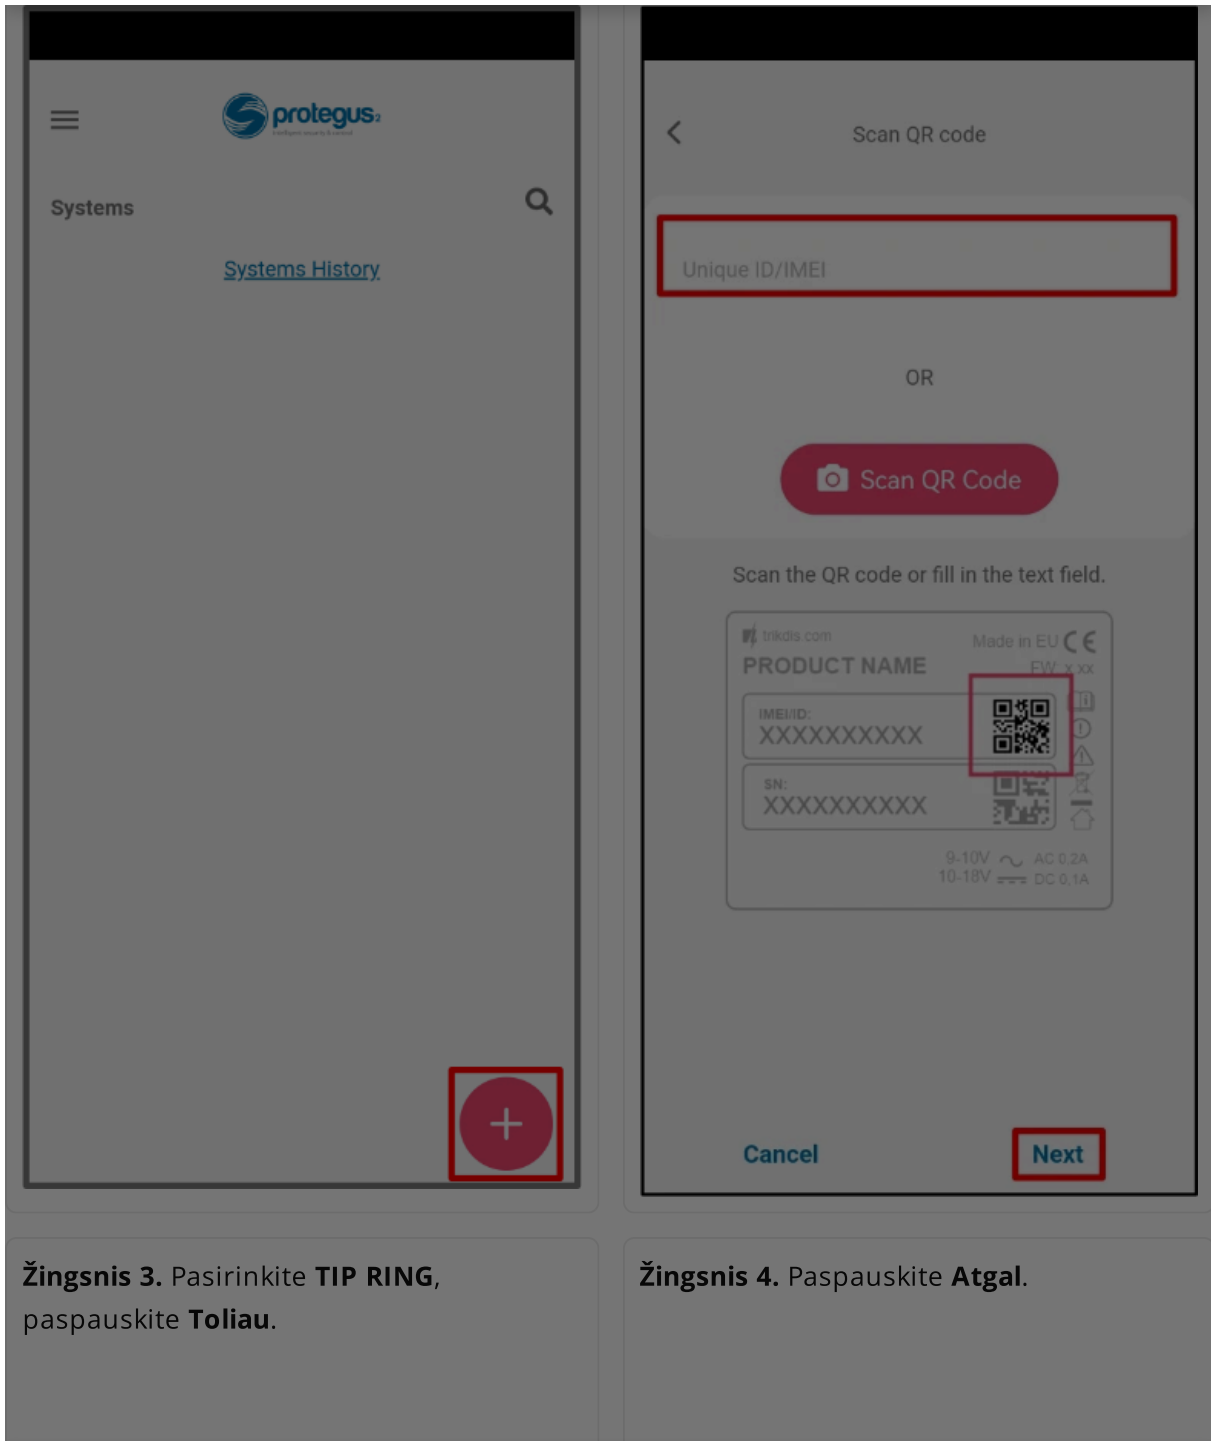

Žingsnis 3. Pasirinkite **TIP RING**, paspauskite **Toliau**.

Žingsnis 4. Paspauskite **Atgal**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



Žingsnis 5. Pasirinkite **Serial BUS**, paspauskite **Toliau**.

Žingsnis 6. Pasirinkite **PARADOX**.



Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



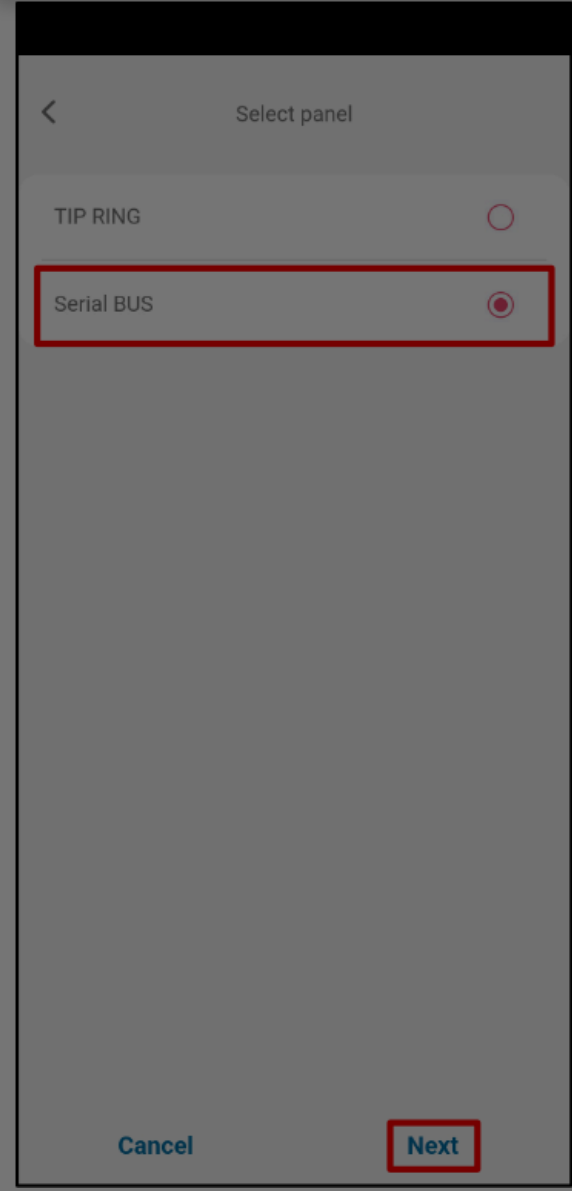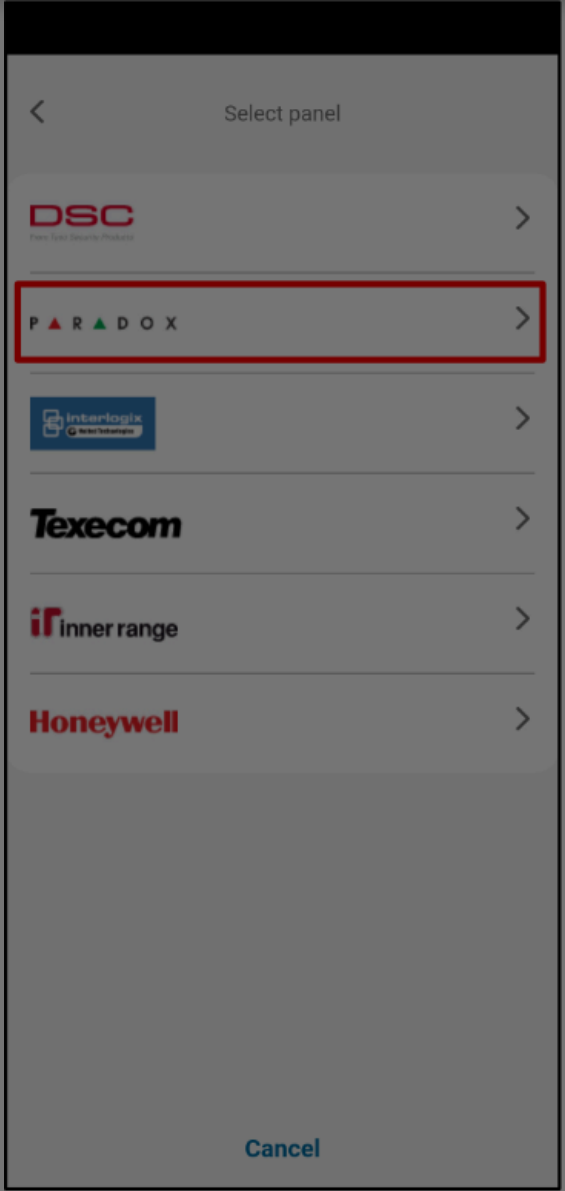


	
<p>Žingsnis 7. Pasirinkite PARADOX SP+/MG+ series KeyBus.</p>	<p>Žingsnis 8. Įveskite Primary Object ID, paspauskite Toliau.</p>

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

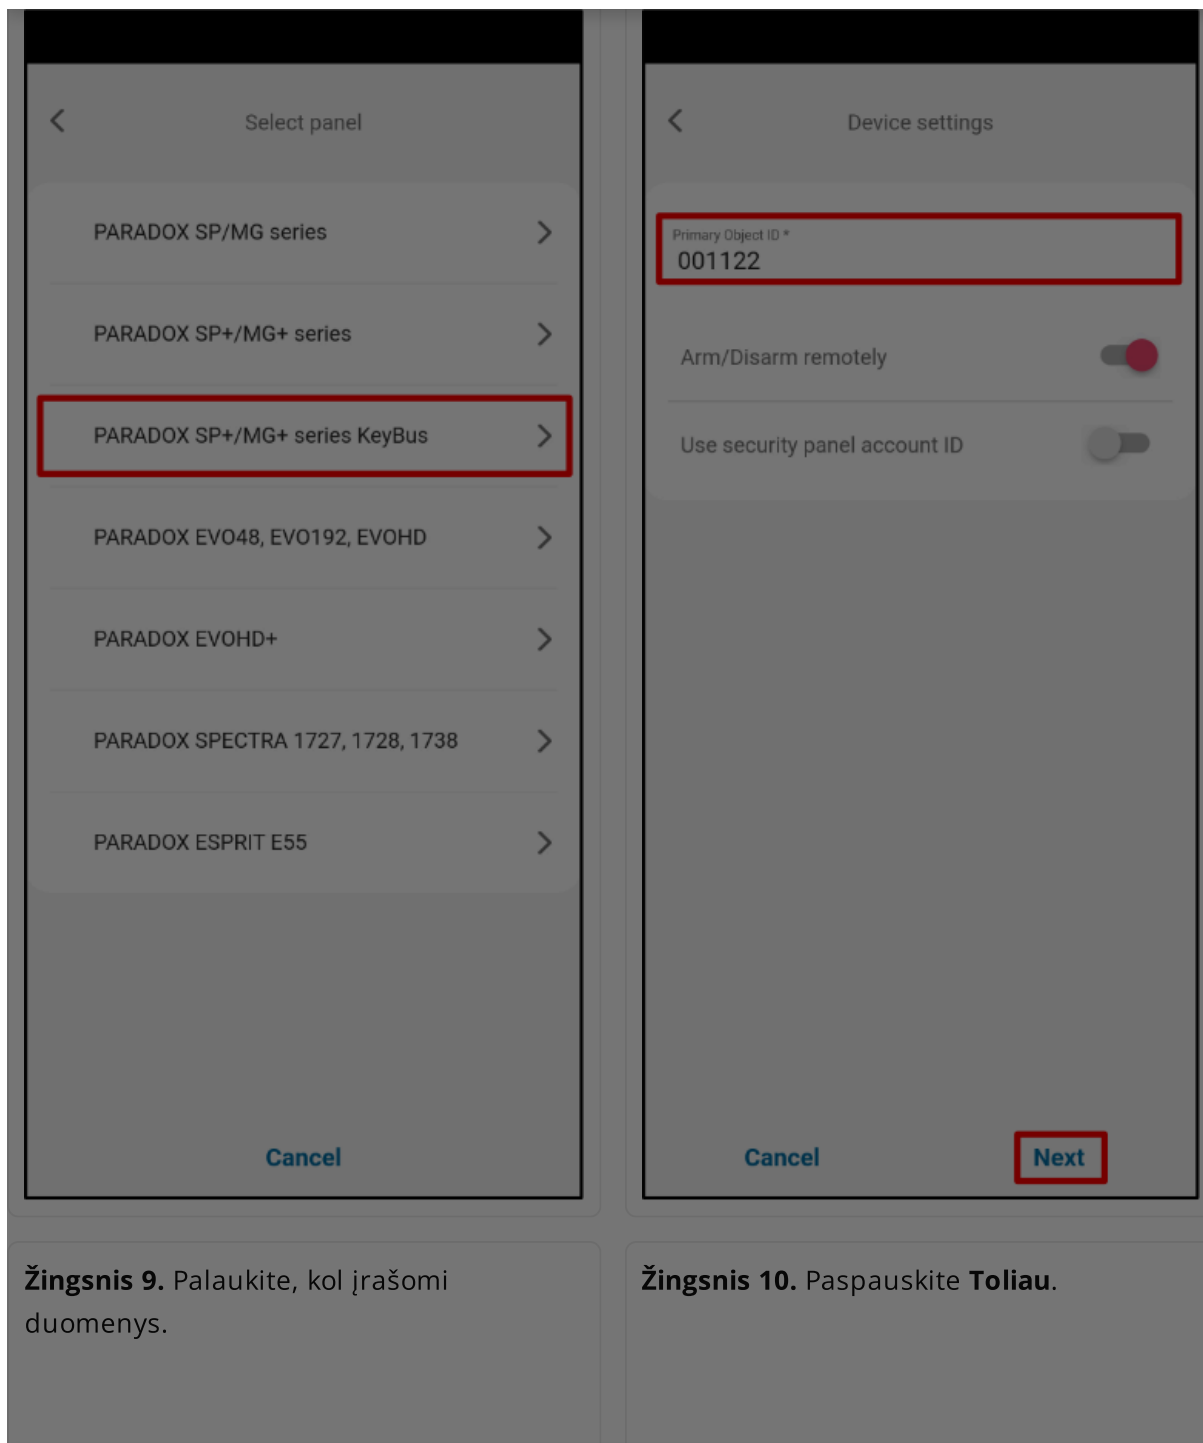

Žingsnis 9. Palaukite, kol įrašomi duomenys.



Žingsnis 10. Paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



 <p>Writing data to the device</p> <p>Connection succeeded ✓</p> <p>Preparation succeeded ✓</p> <p>Writing... ⌂</p> <p>Restart</p> <p>Connect</p> <p>Cancel</p>	 <p>Configuration successful</p> <p>Connection succeeded ✓</p> <p>Preparation succeeded ✓</p> <p>Write successful ✓</p> <p>Restarted ✓</p> <p>Connection succeeded ✓</p> <p>Next</p>
<p>Žingsnis 11. Įveskite sistemos Pavadinimą, paspauskite Toliau.</p>	<p>Žingsnis 12. Paspauskite Praleisti (jei dabar nepridedate naudotojų).</p>



Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



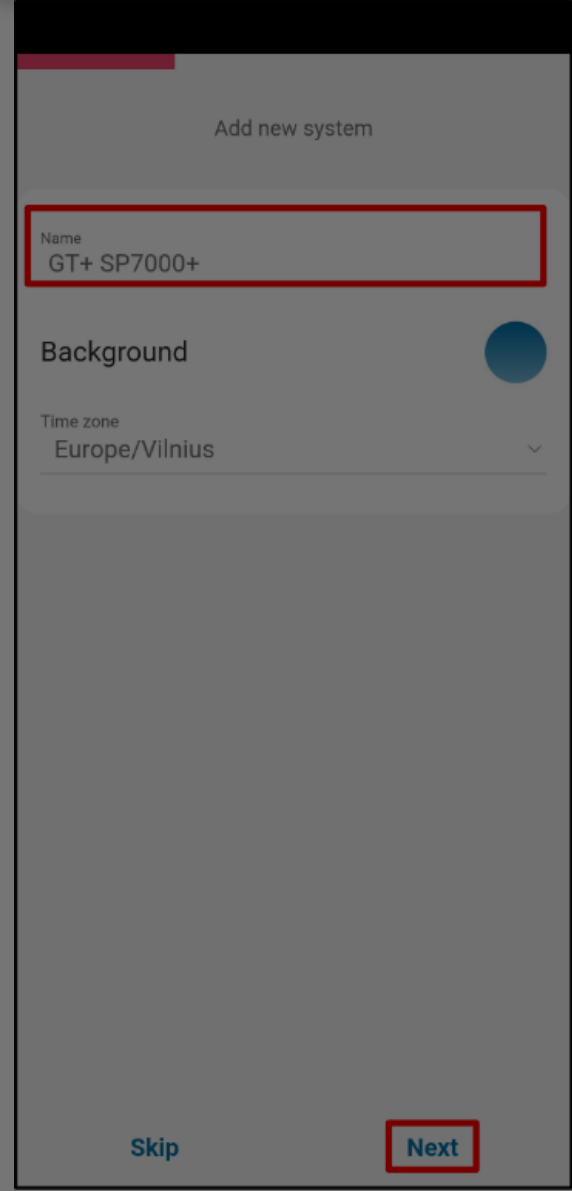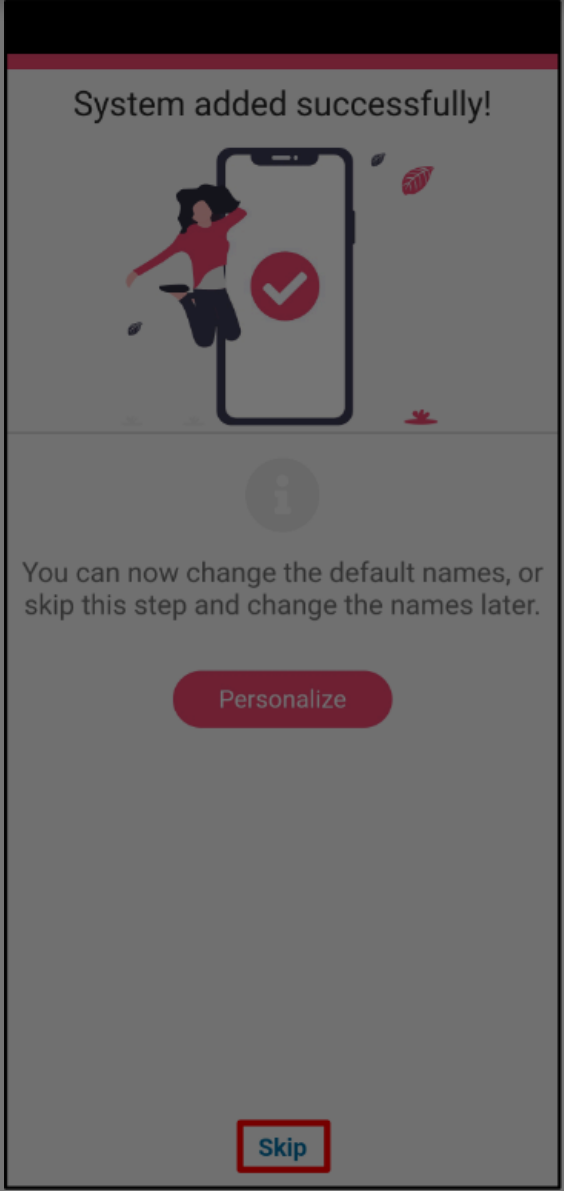


 <p>Add new system</p> <p>Name GT+ SP7000+</p> <p>Background</p> <p>Time zone Europe/Vilnius</p> <p>Skip Next</p>	 <p>System added successfully!</p> <p>You can now change the default names, or skip this step and change the names later.</p> <p>Personalize</p> <p>Skip</p>
<p>Žingsnis 13. Palaukite ~1 minutę, kol užbaigiama.</p>	<p>Žingsnis 14. Konfigūracija baigta.</p>

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

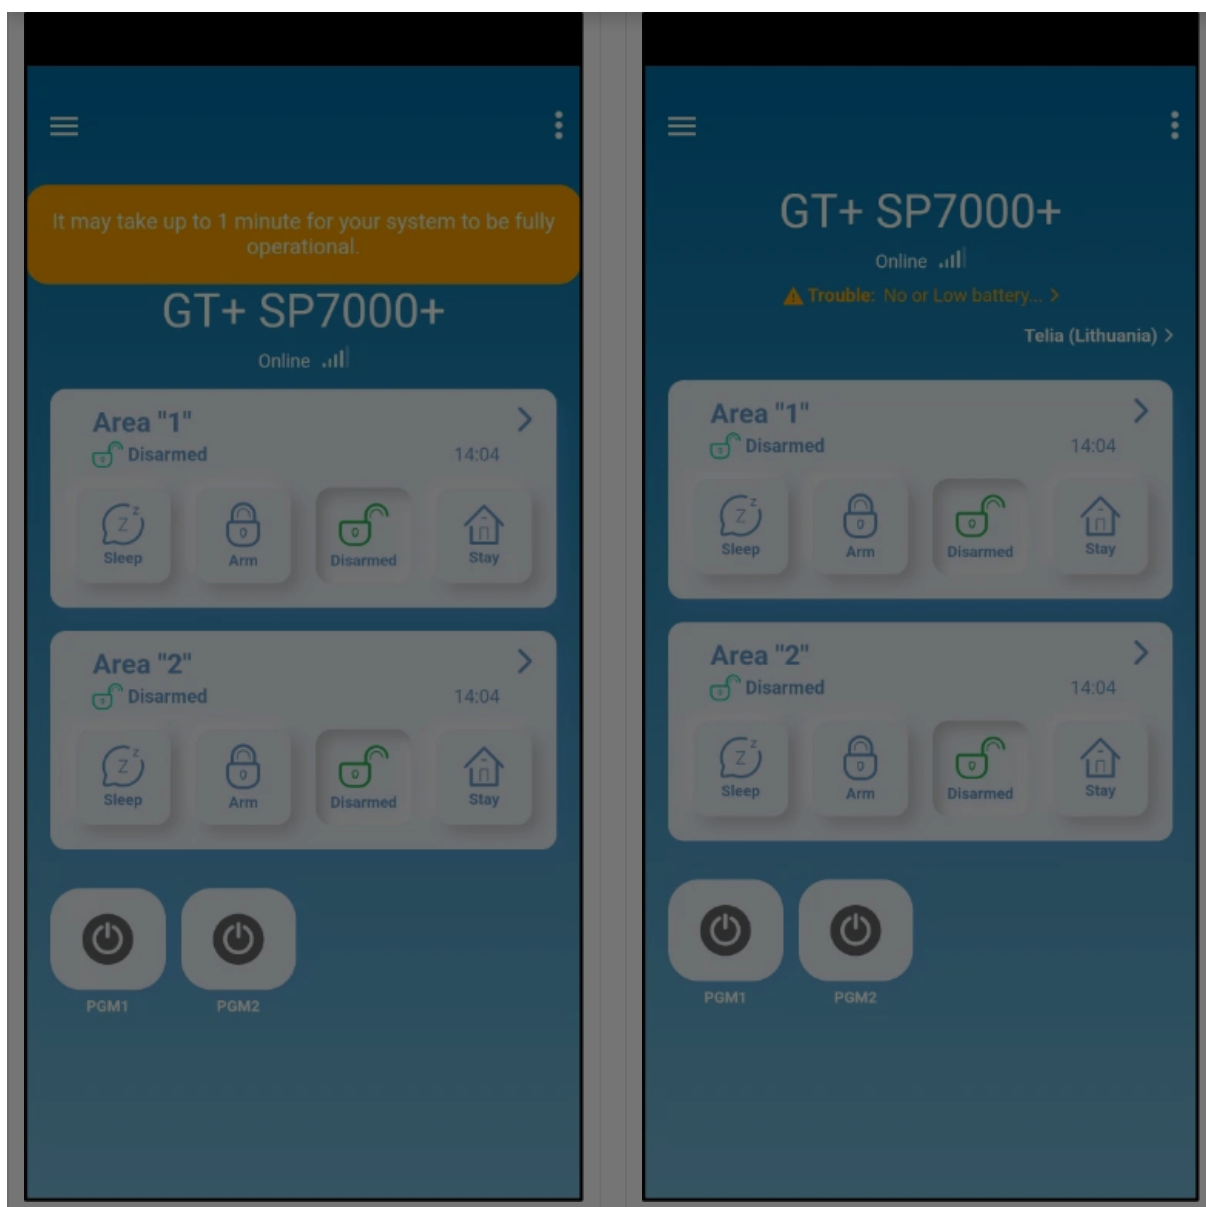

PATARIMAS

Jei Protegus2 negali užbaigti duomenų įrašymo, patikrinkite KeyBus (YEL/GRN) pajungimą, IMEI įvedimą ir ar CMS/Contact ID nustatymai išsaugoti panelėje.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics