

KOMUNIKATORIAI

Honeywell Vista-48 su GT/GT+/GET greitas paruošimas



GT product image

GT



GT+ product image

GT+



GET product image

GET

Trumpi pajungimo ir programavimo žingsniai, skirti prijungti GT/GT+/GET komunikatorių prie Honeywell Ademco Vista-48 (Vista-20, Vista-15) centralės naudojant KeyBus, tada pridėti sistemą į Protegus2. Naudokite kartu su pilnais vadovais kitiems nustatymams. (Gnybtų pavadinimai GT/GT+/GET gali nežymiai skirtis, tačiau jungtys yra tokios pačios.)



ATSARGIAI

Montavimą ir aptarnavimą gali atlikti tik kvalifikuoti specialistai. Prieš jungdami laidus atjunkite maitinimą. Neautorizuoti pakeitimai panaikina garantiją.

1. Reikalavimai

1. GT/GT+/GET programinės įrangos versija 1.21, įdėta SIM kortelė, PIN išjungtas, aktyvus duomenų planas.
2. Honeywell Ademco Vista-48 (Vista-20, Vista-15) centralė su klaviatūros prieiga (yra montuotojo kodas).
3. CMS paskyros numeris, jei pranešimai siunčiami į CMS.
4. Protegus2 įmonės/montuotojo paskyra ir komunikatoriaus IMEI.

Cookie consent


We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.



Google Analytics

Accept

Reject

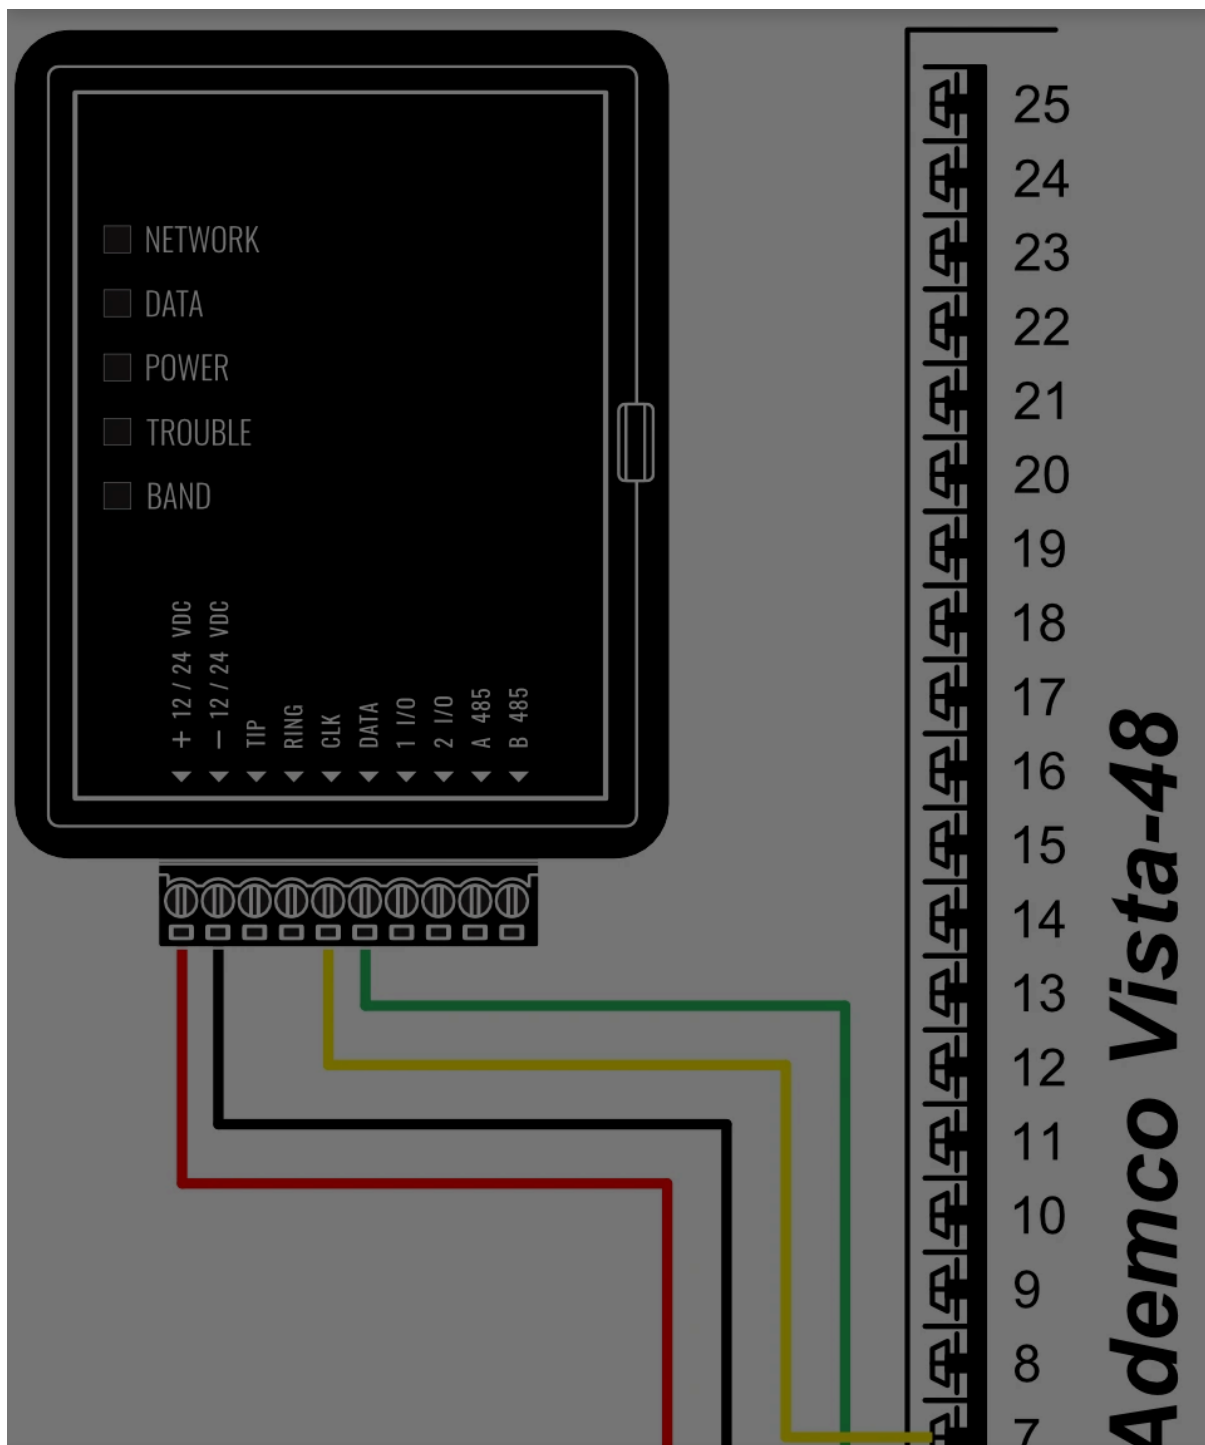

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics





3. Honeywell Ademco Vista-48 (Vista-20, Vista-15) signalizacijos centralės programavimas klaviatūra

Naudodami centralės klaviatūrą įveskite šias sekcijas ir nustatykite kaip nurodyta:


Contact ID pranešimų įjungimas

Klaviatūros įvedimas	Veiksmo aprašymas
*4112800 *	Įeiti į programavimo režimą
*591 *	Įjungti „Exit Error Report Code“.
*601 *	Įjungti „Trouble Report Code“.
*611 *	Įjungti „Bypass reporting Code“.
*621 *	Įjungti „AC Mains Loss Report Code“.
*631 *	Įjungti „Low Battery Report Code“.
*641 *	Įjungti „Test Report Code“.
*651 *	Įjungti „Open Report Code“.
*661 *	Įjungti „Arm Away/Stay Report Code“.
*671 *	Įjungti „RF Low Battery Report Code“.
*681 *	Įjungti „Cancel Report Code“.
*691 *	Įjungti „Alarm Restores“.
*701 *	Įjungti „Alarm Restore Report Code“.
*711 *	Įjungti „Trouble Restore Report Code“.
*721 *	Įjungti „Bypass Restore Report Code“.
*731 *	Įjungti „AC Mains Restore Report Code“.
*741 *	Įjungti „Low Battery Restore Report Code“.
*751 *	Įjungti „RF Low Restore Code“.
*761 *	Įjungti „Test Restore Report Code“.
*291 *	Įjungti „ECP Contact ID Output for ACM“.
*1891 *	Įjungti „AUI Device 1 and 2 Enable“.
*99	Išėiti iš programavimo režimo

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

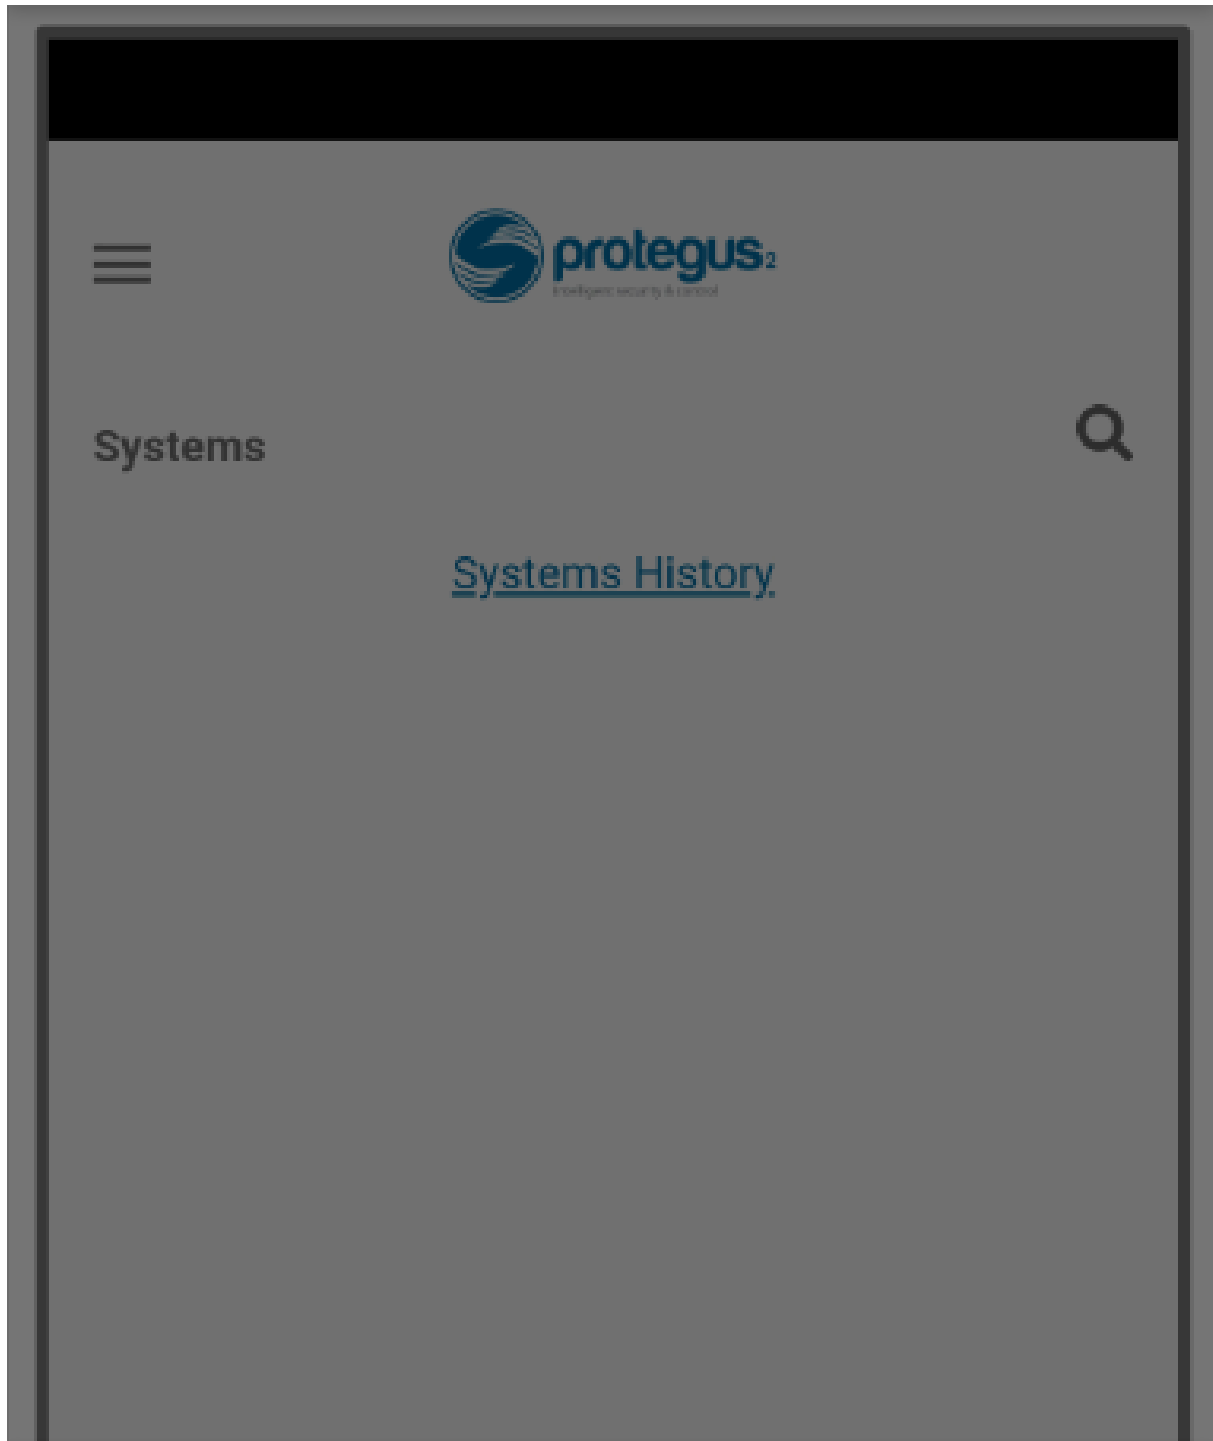

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 2. Įveskite komunikatoriaus **IMEI**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




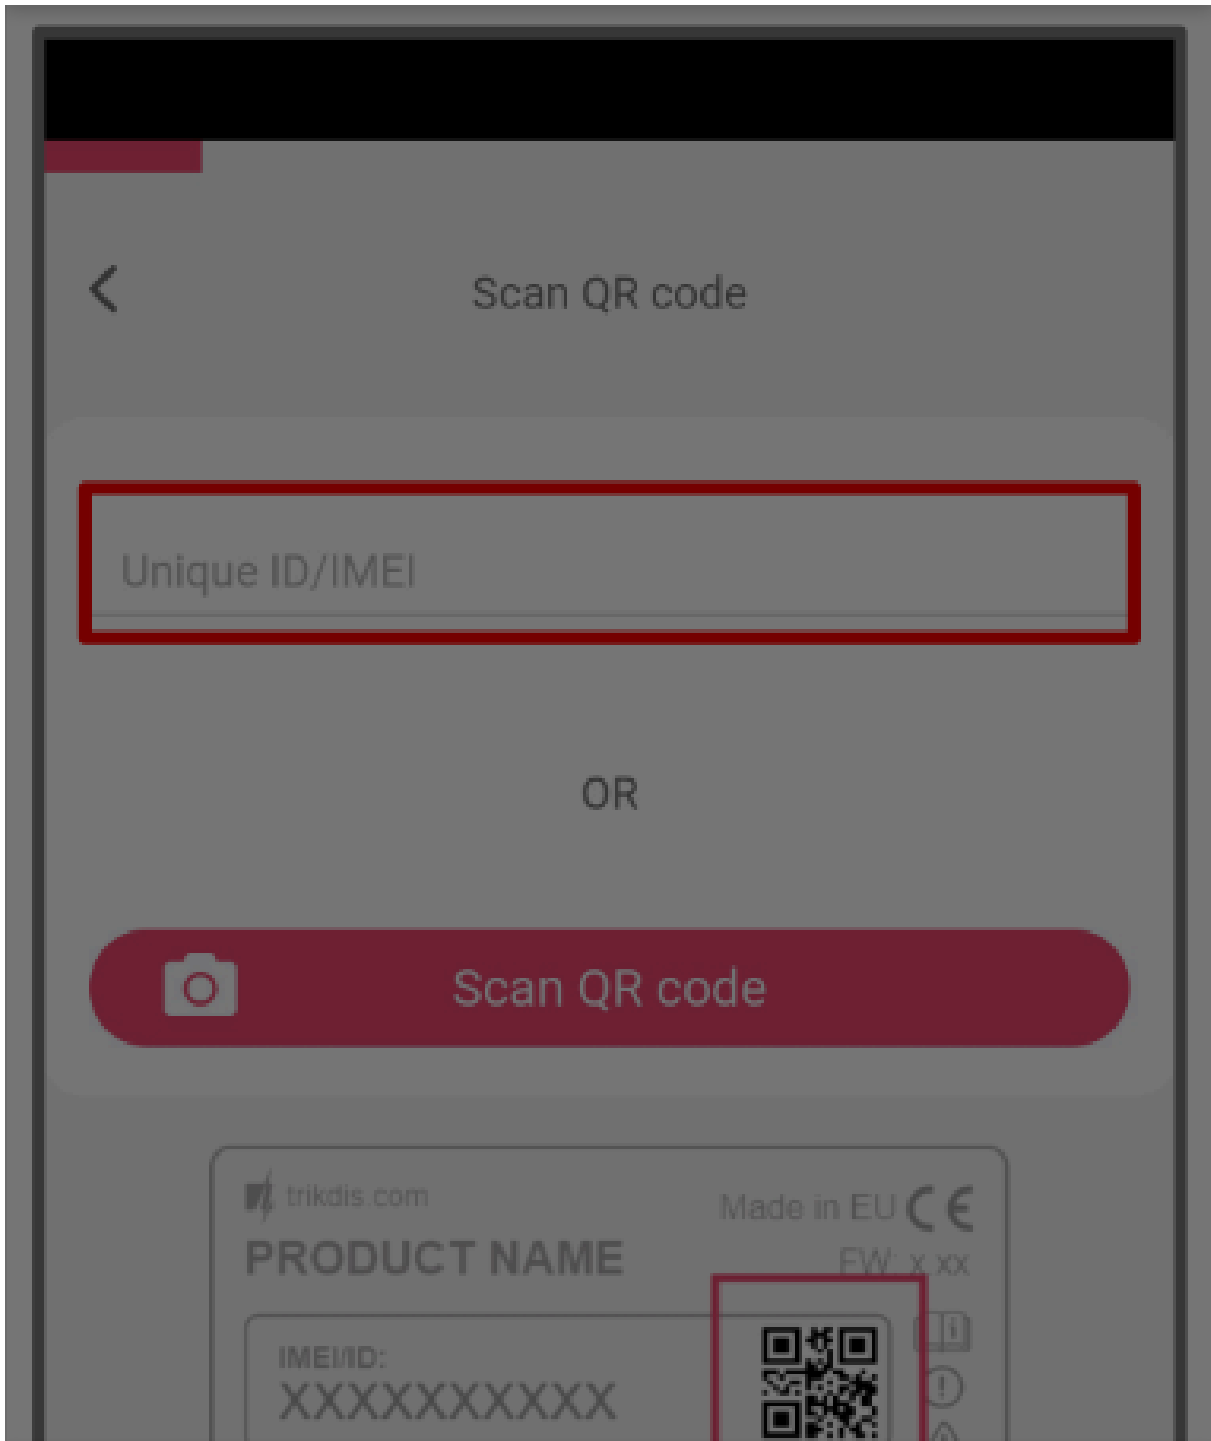

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




Žingsnis 3. Pasirinkite apsaugos įmonę.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Add only to Protegus2

Žingsnis 4. Pasirinkite **Honeywell**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

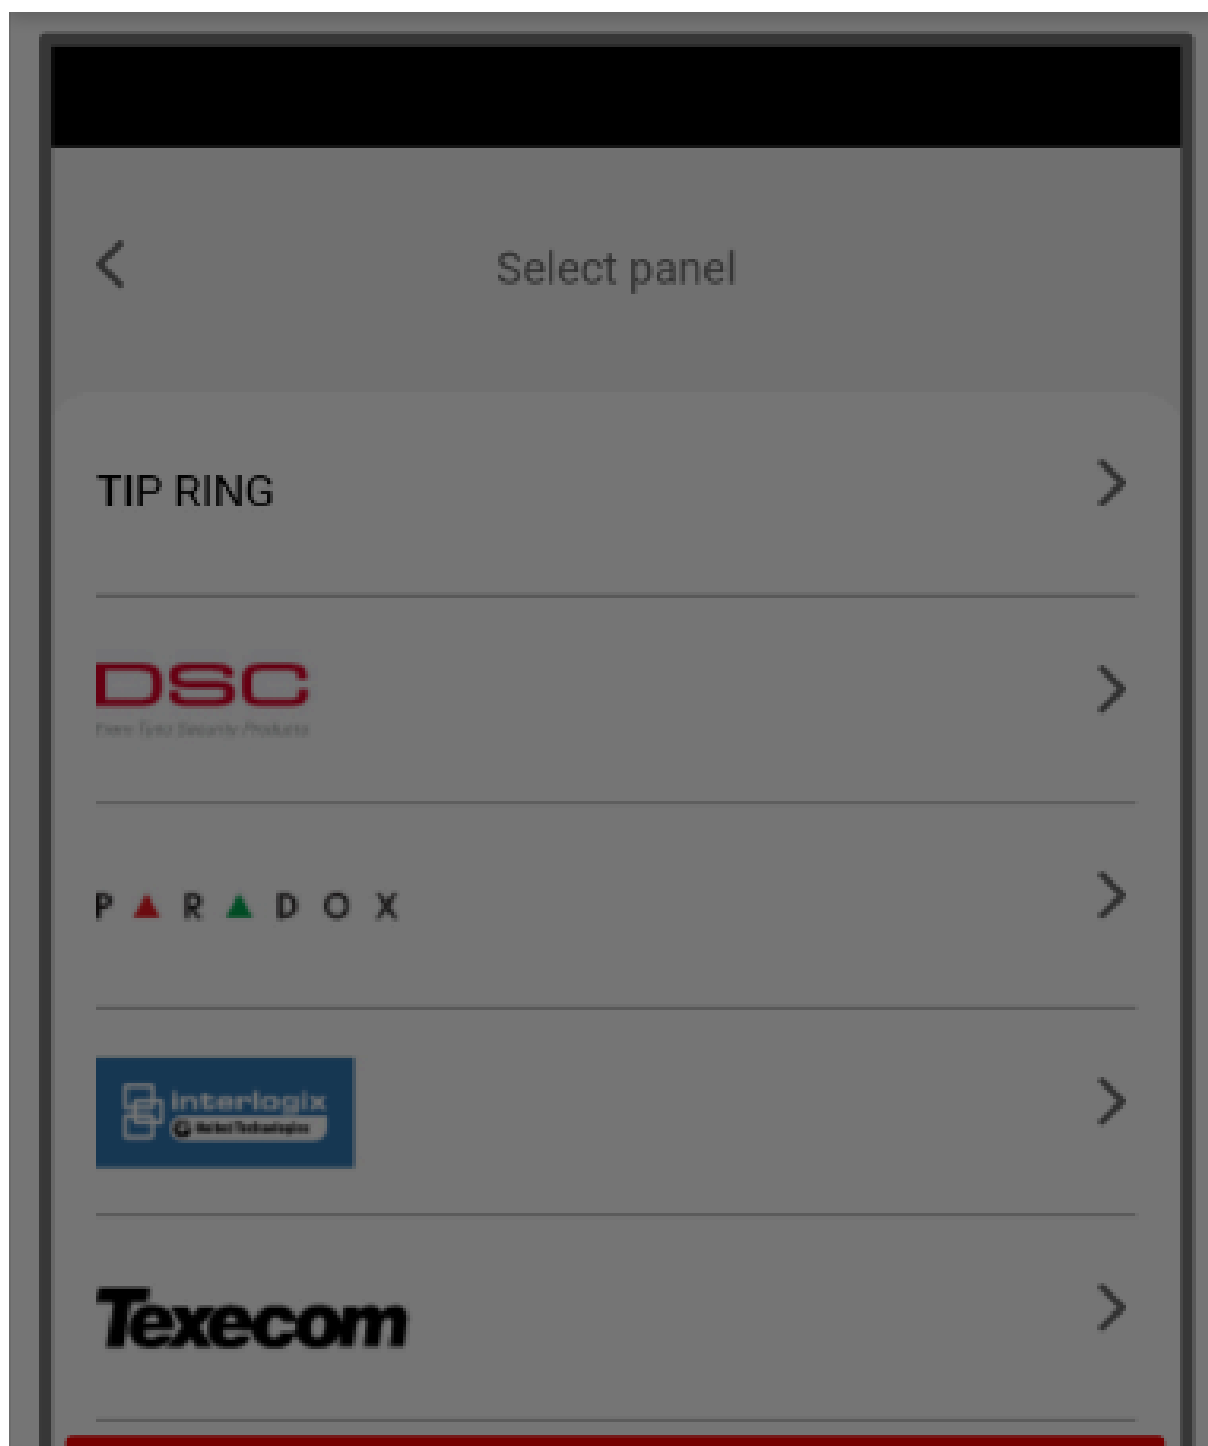

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel

Žingsnis 5. Pasirinkite **Vista 48 (Vista 20, Vista 15)**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Žingsnis 6. Įveskite **Object ID** ir **Module ID**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



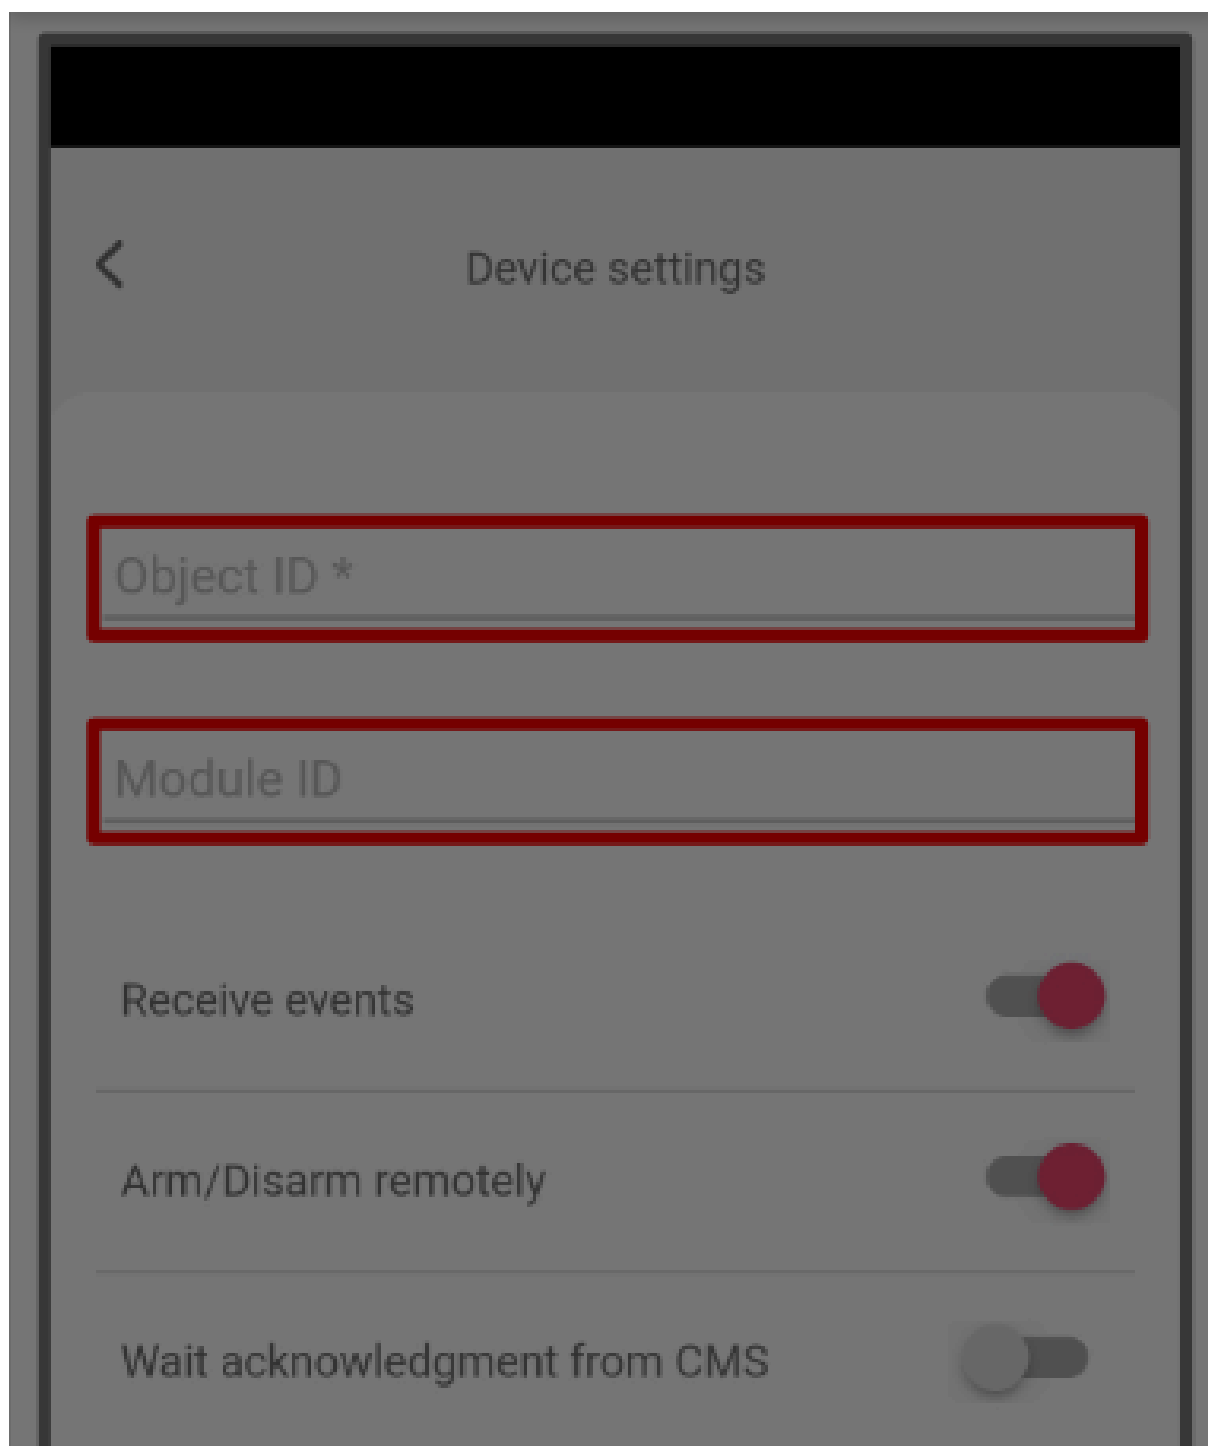


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 7. Palaukite, kol įrašomi duomenys.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



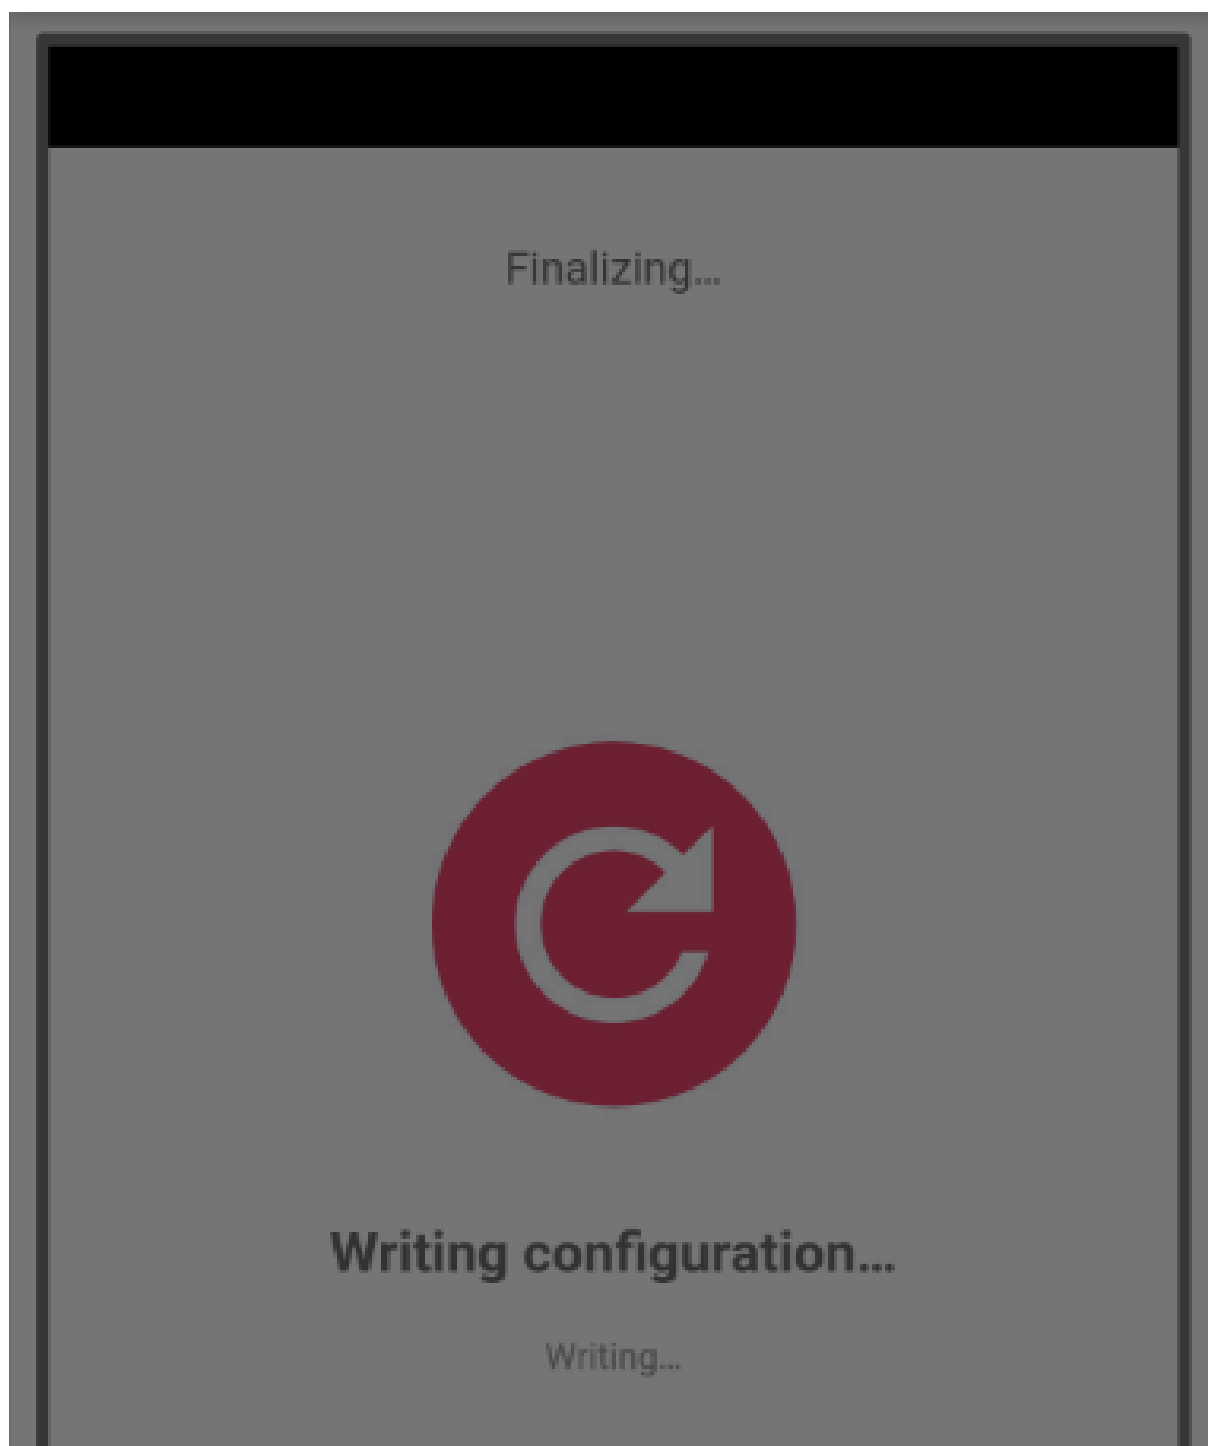

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Cancel

Žingsnis 8. Paspauskite **Pridėti į Protegus2**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

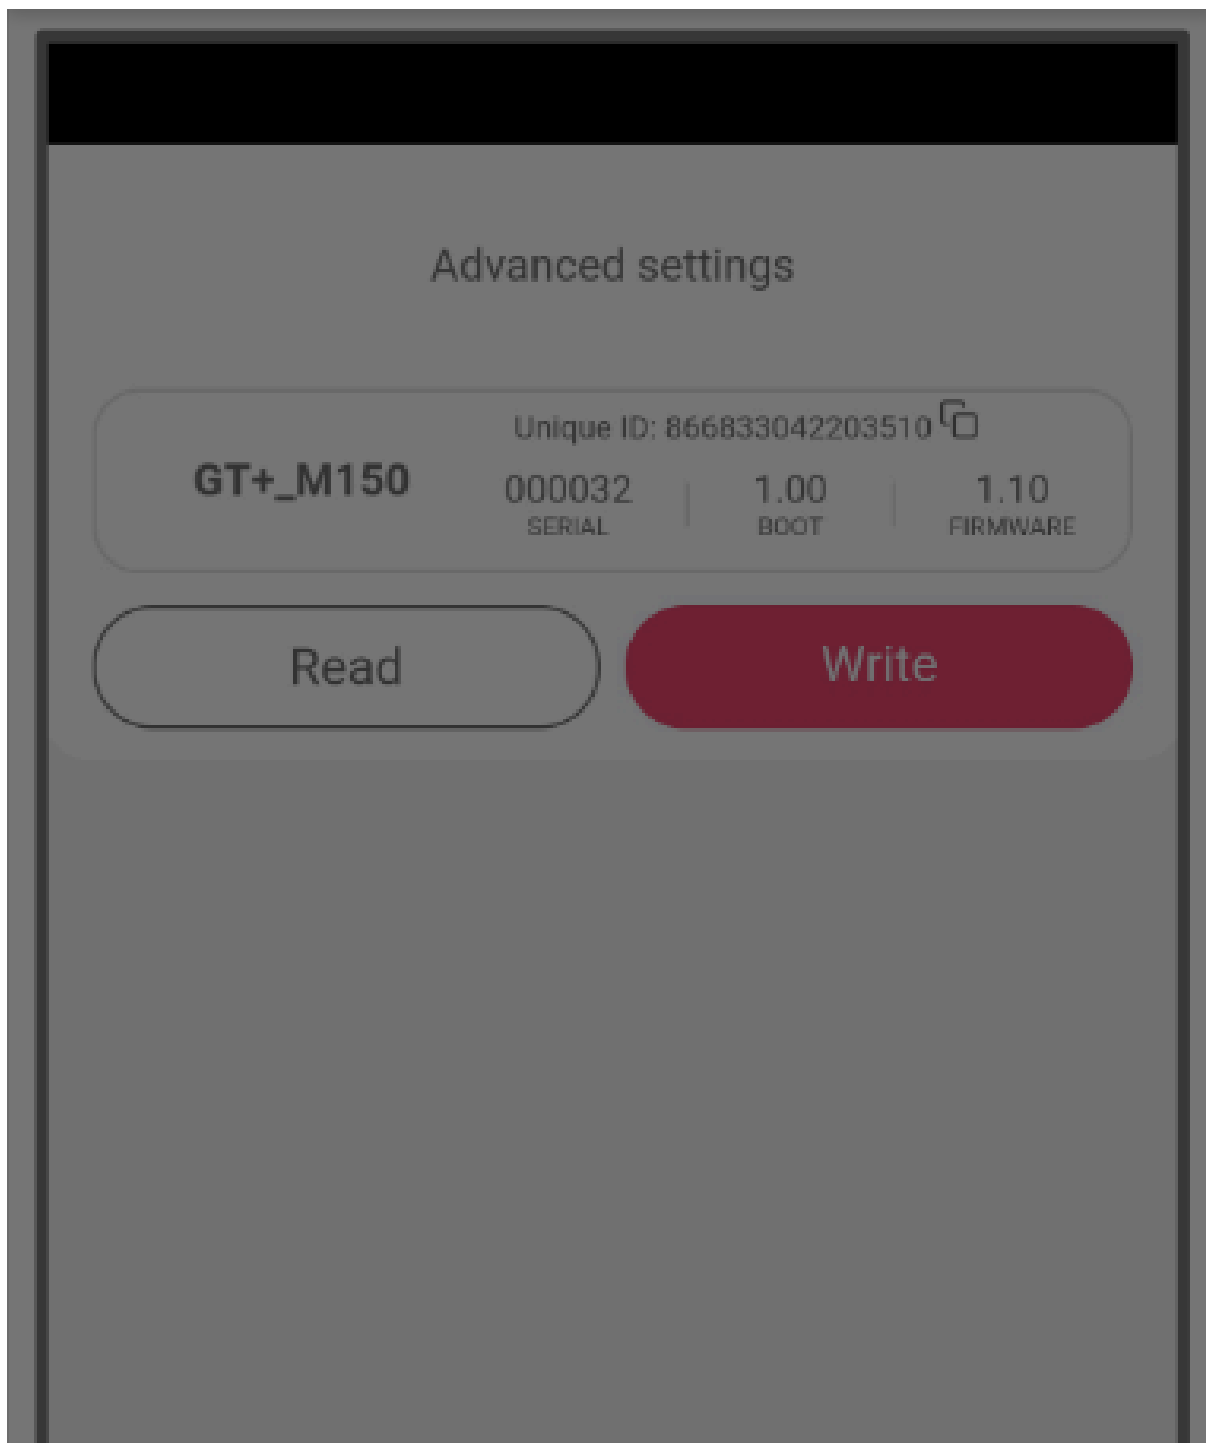


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



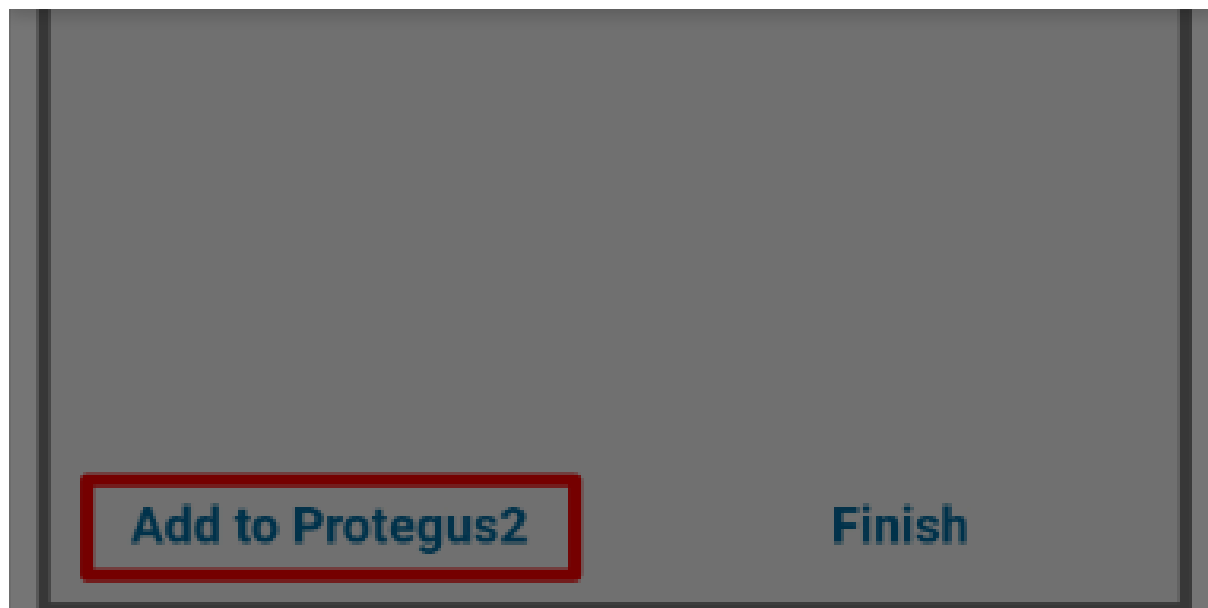


Žingsnis 9. Įveskite sistemos **Pavadinimą**, paspauskite **Toliau**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



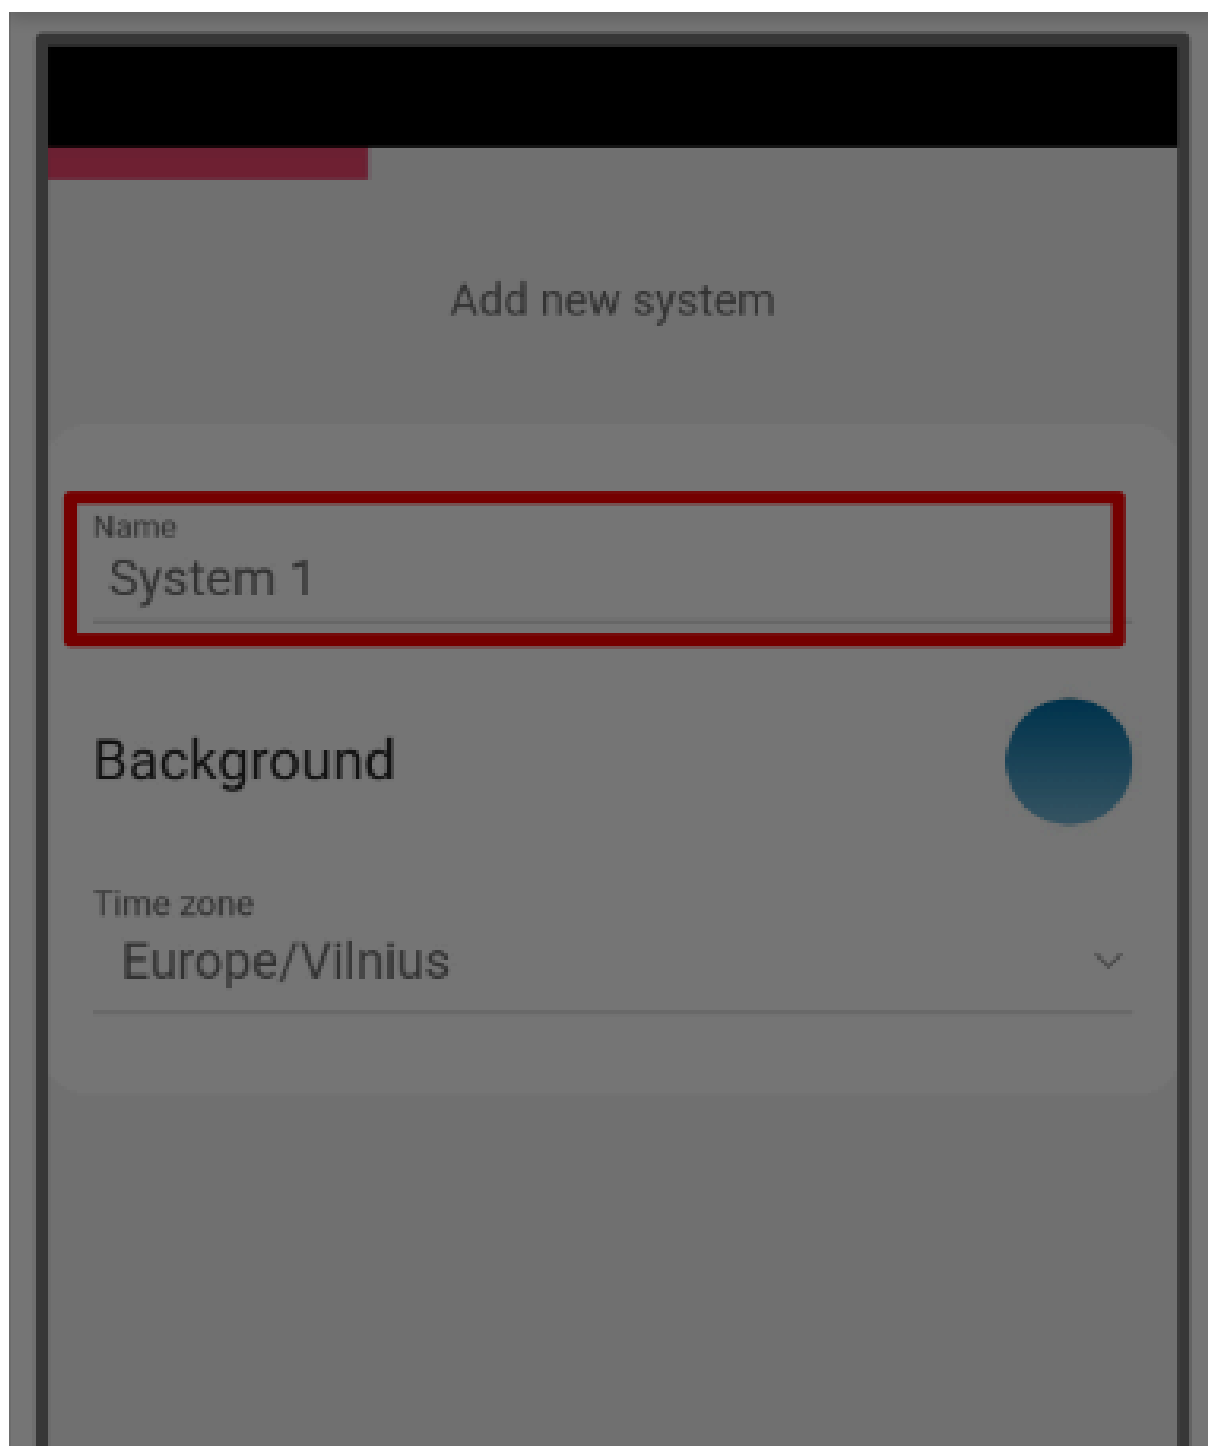


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 10. Paspauskite **Praleisti**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



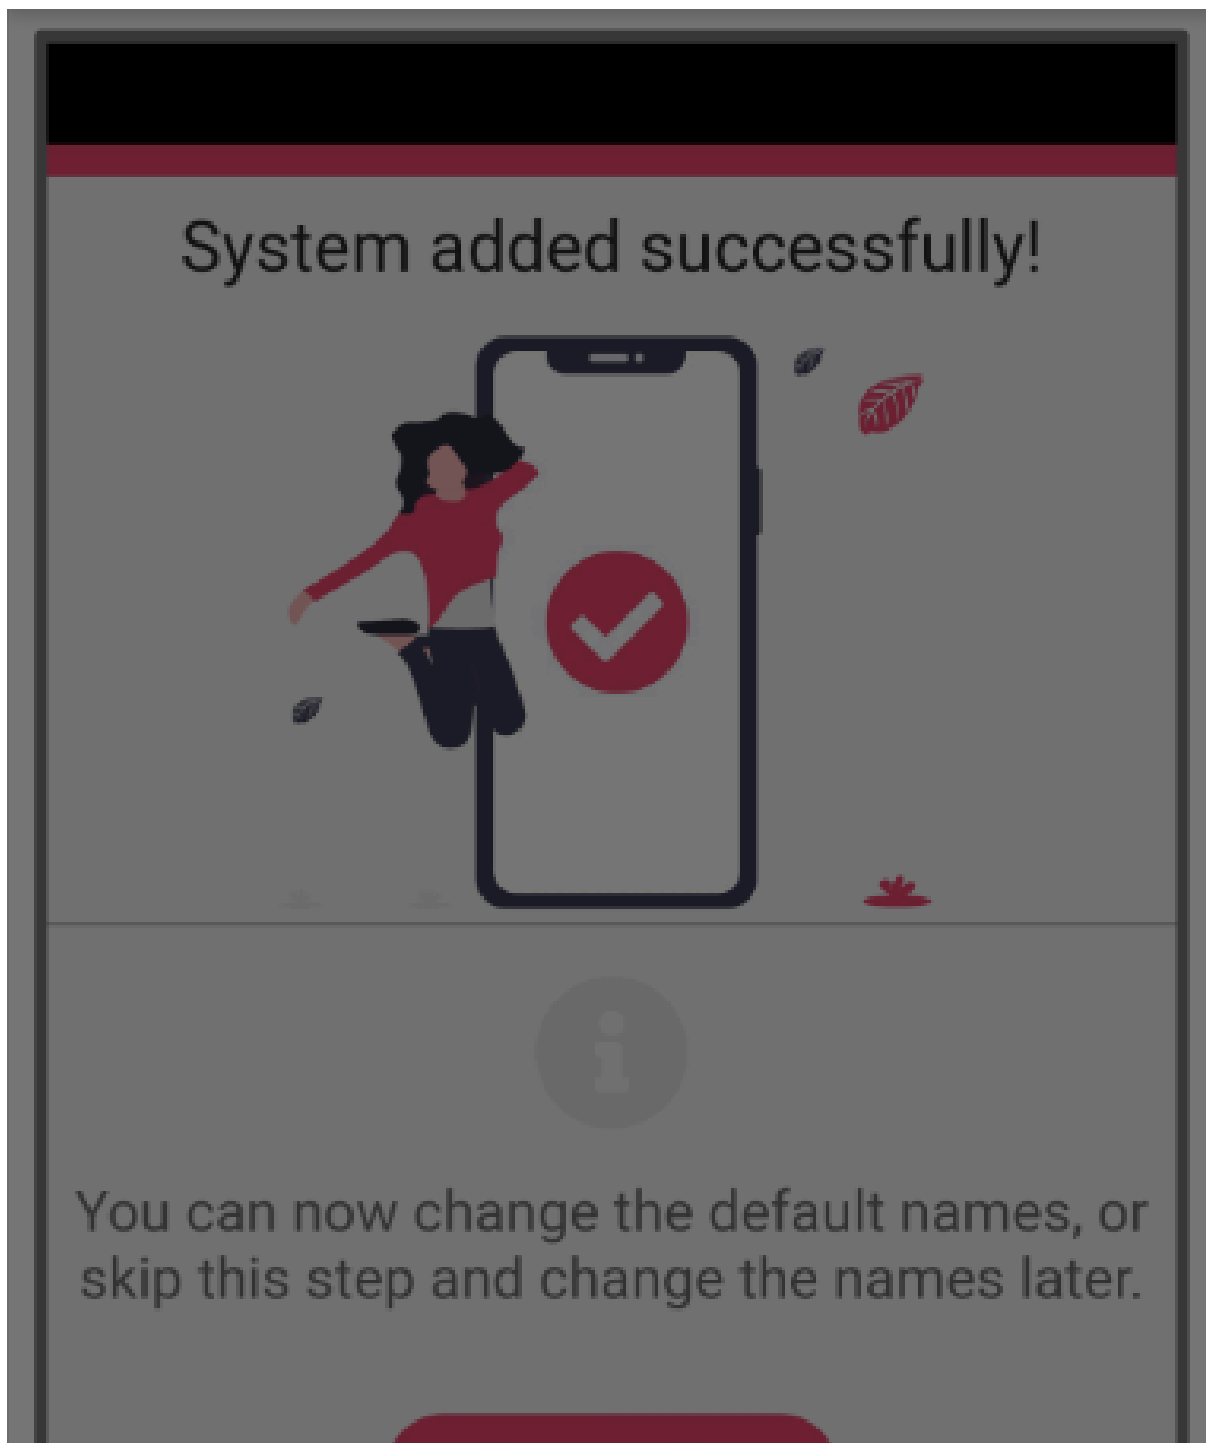

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




Skip

Žingsnis 11. Paspauskite ant sistemos.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

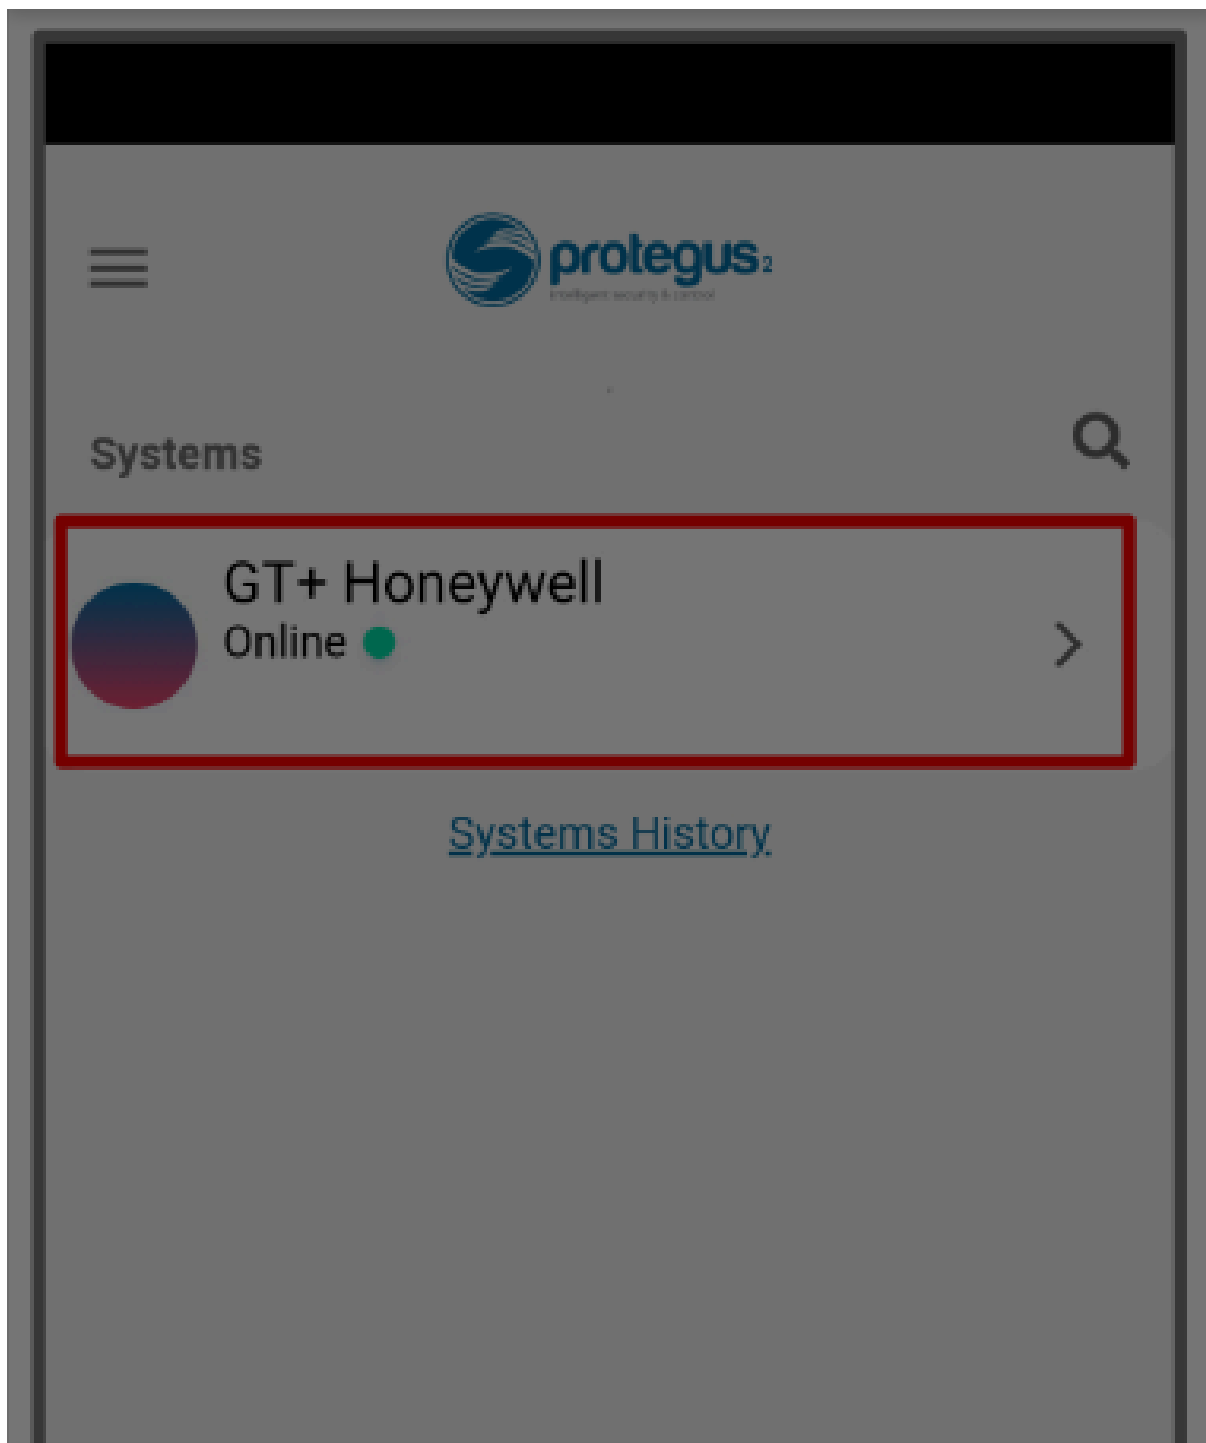

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Žingsnis 12. Palaukite 1 minutę, kol užbaigiama, ir paspauskite **Perduoti**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

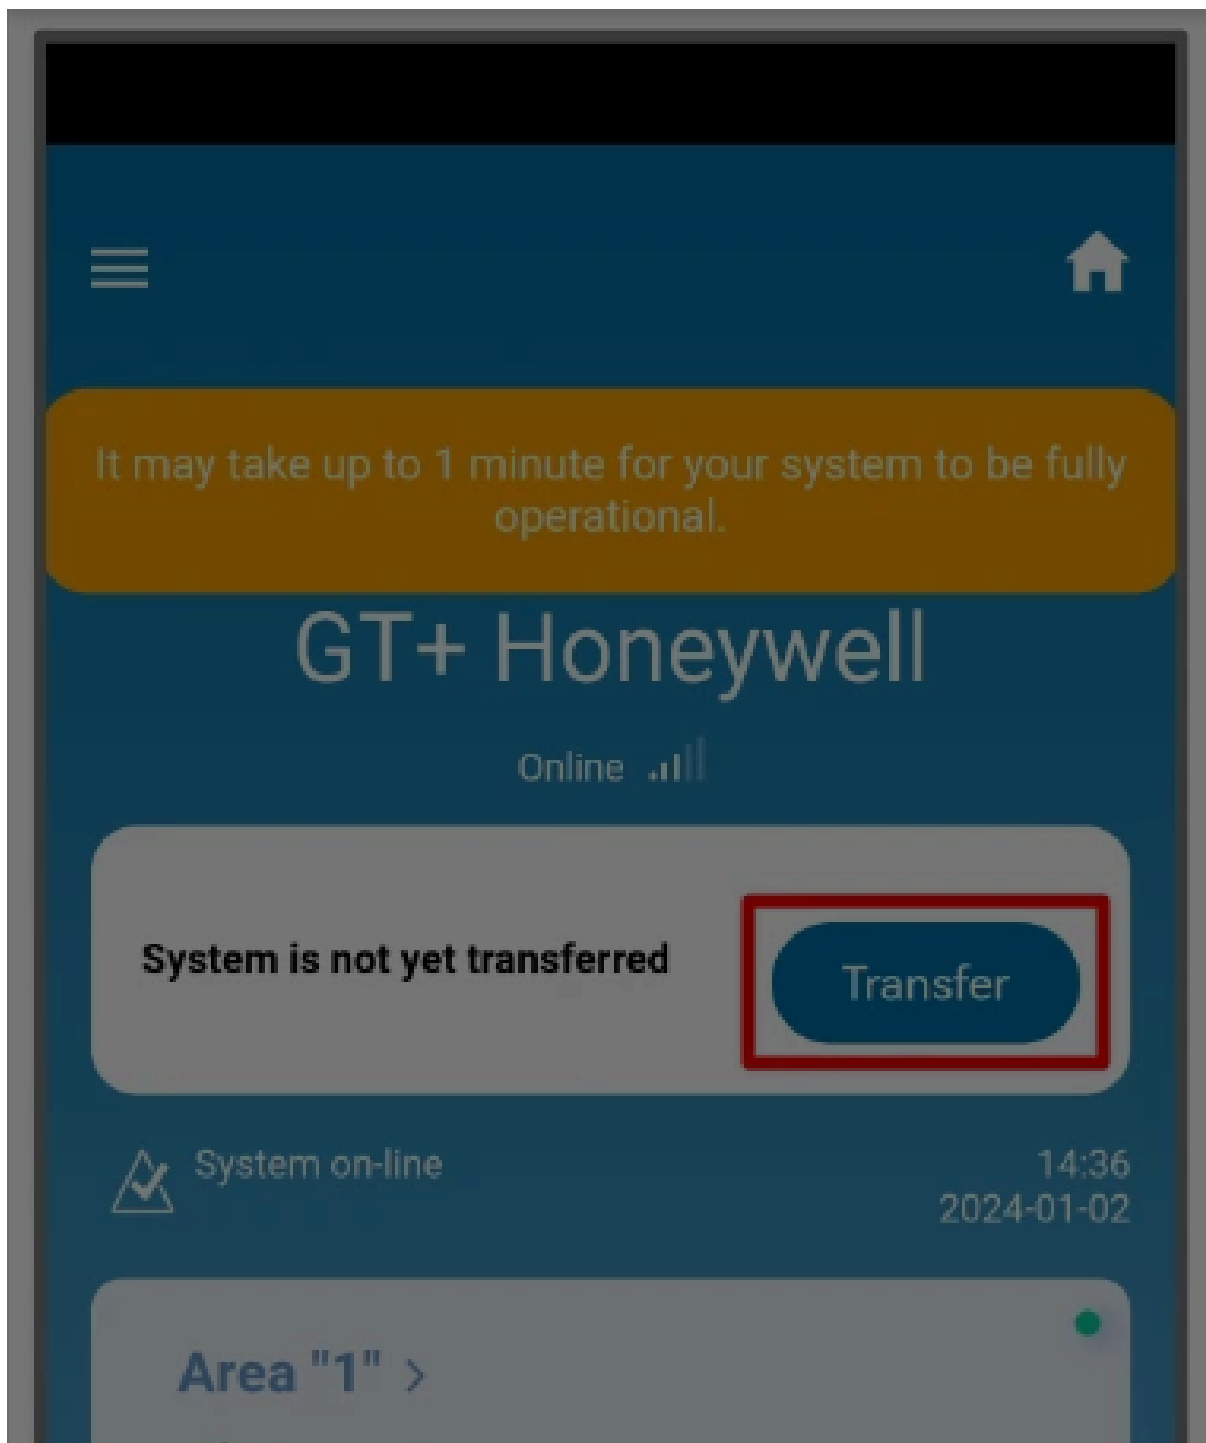


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



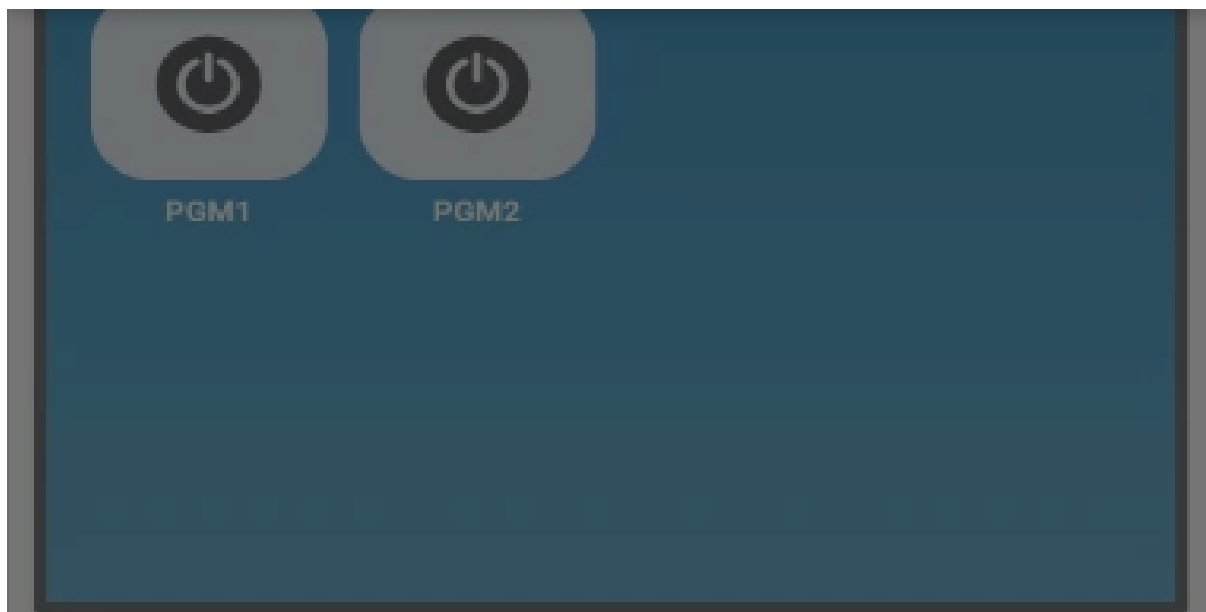


Žingsnis 13. Įveskite naudotojo el. paštą, kuriam montuotojas perduos sistemą.
Paspauskite **Perduoti**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



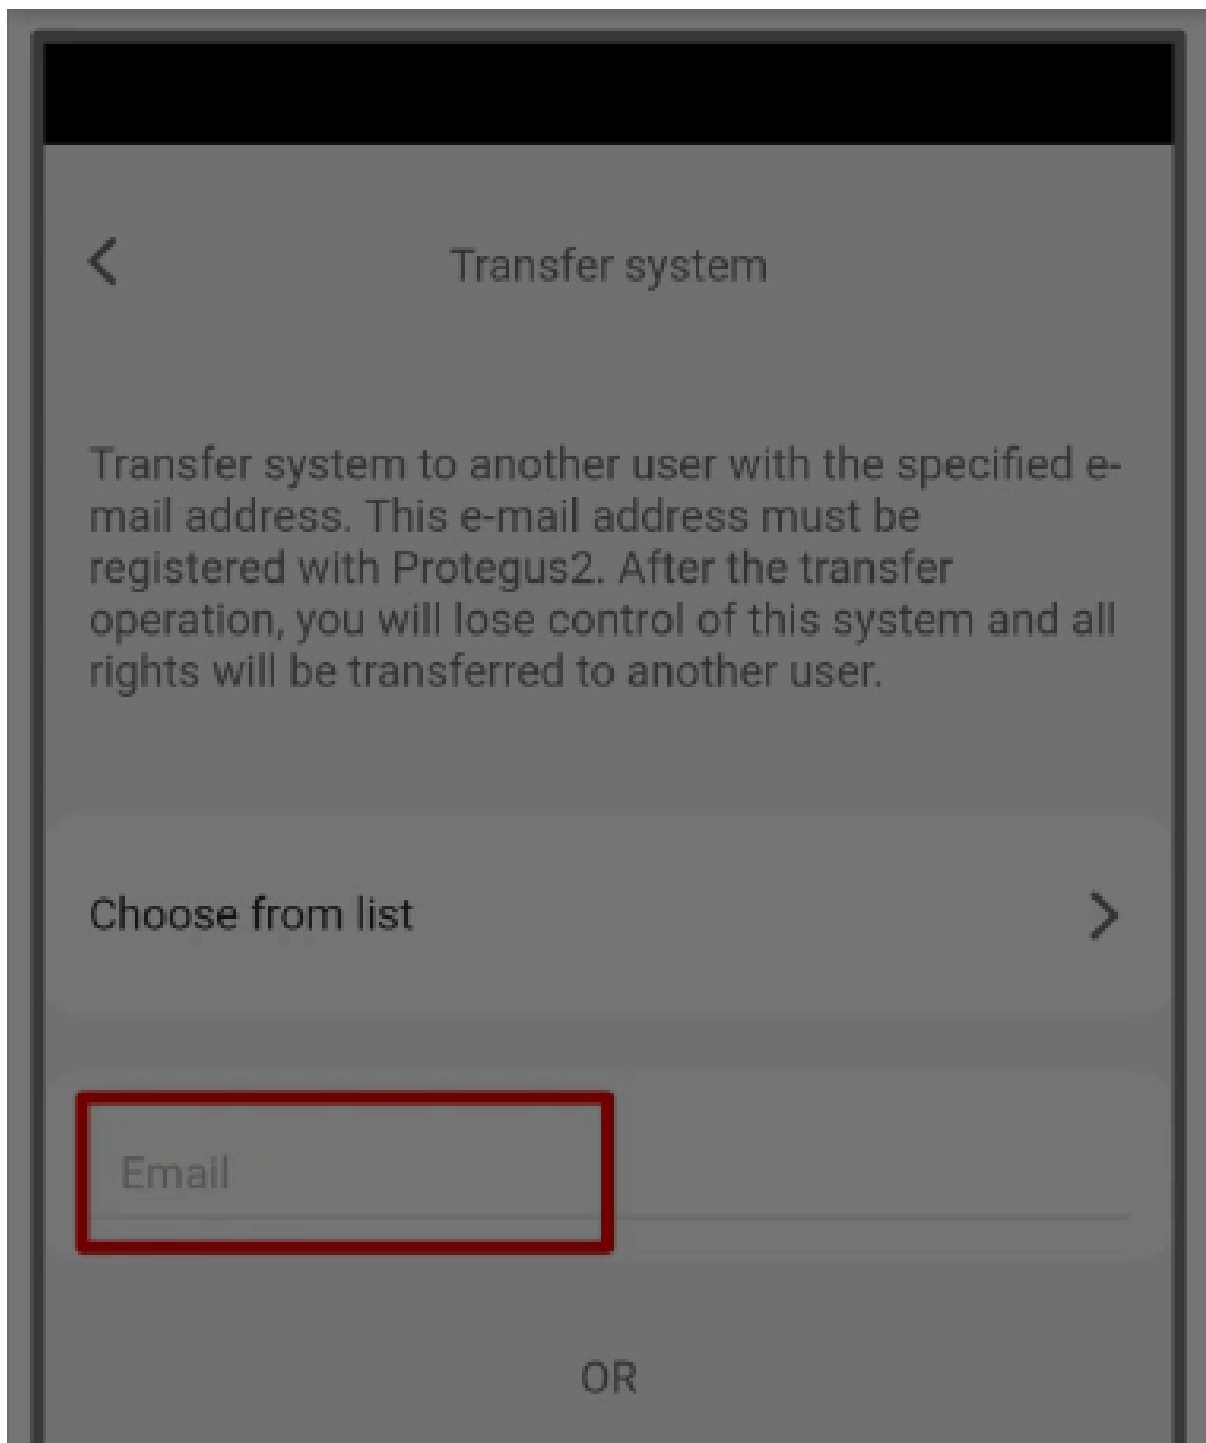


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



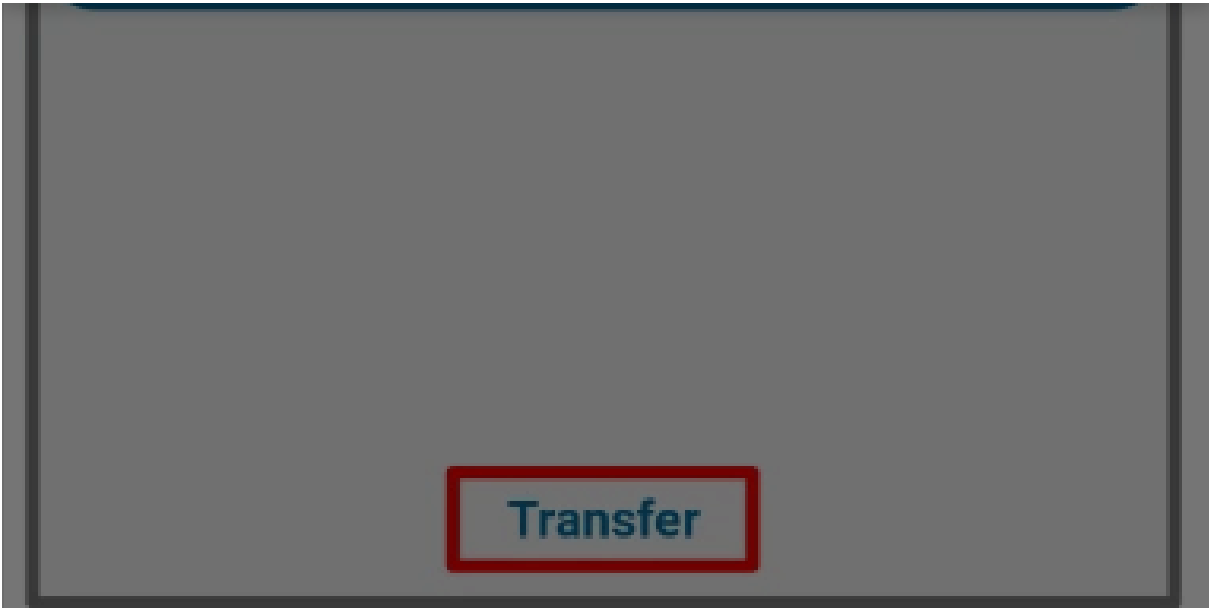


Transfer

Žingsnis 14. Sistema atsiras Protegus naudotojo telefone.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

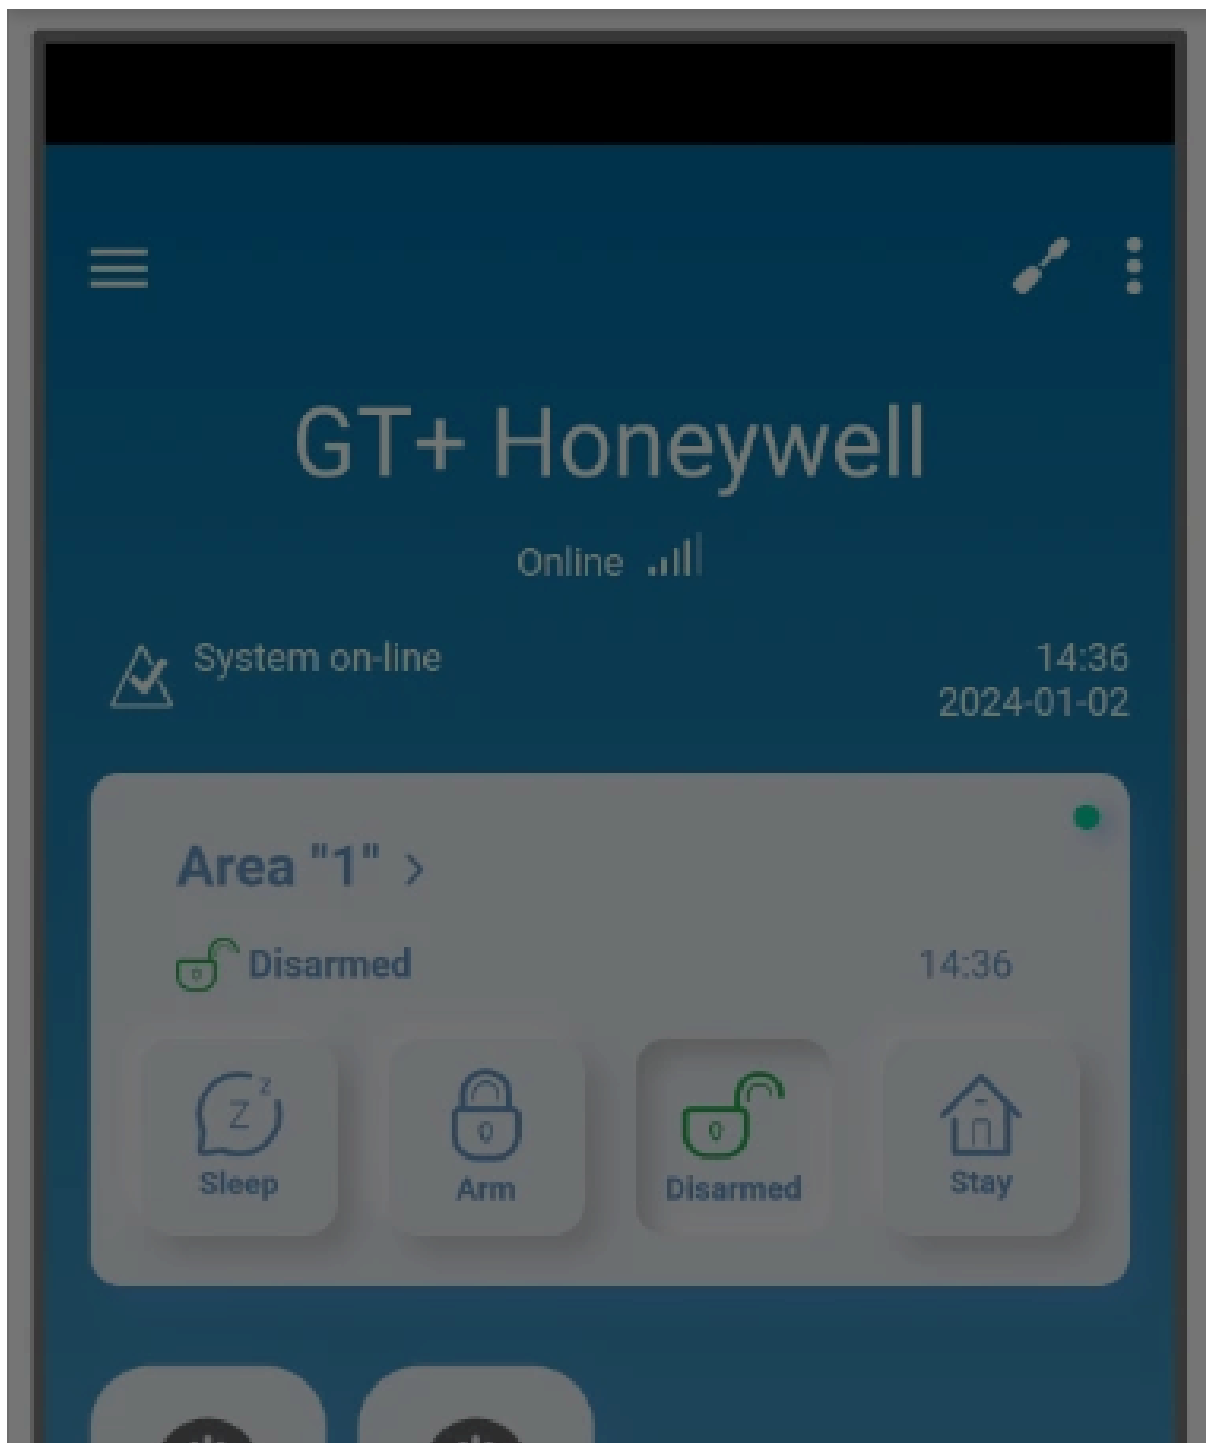

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





PATARIMAS

Baigę įrengimą ir nustatymus atlikite sistemos patikrą:

1. Sukurkite įvykį:
 - įjunkite/išjunkite sistemą centralės klaviatūra.
 - sukelti zonos aliarmą, kai apsaugos sistema įjungta.
2. Įsitikinkite, kad įvykis pasiekia CMS (Central Monitoring Station) ir Protegus2 programėlę.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

