

КОММУНИКАТОРЫ

Honeywell Vista-48 с GT/GT+/GET быстрая настройка



GT product
image
GT



GT+ product
image
GT+



GET product
image
GET

Краткие шаги по подключению и программированию для подключения коммуникатора GT/GT+/GET к панели Honeywell Ademco Vista-48 (Vista-20, Vista-15) через KeyBus, затем добавления системы в Protegus2. Используйте вместе с полными руководствами для остальных настроек. (Обозначения клемм на GT/GT+/GET могут немного отличаться, но подключения одинаковые.)

ОСТОРОЖНО

Установку и обслуживание должны выполнять только квалифицированные специалисты. Перед подключением отключите питание. Несанкционированные изменения аннулируют гарантию.

1. Требования

1. Прошивка GT/GT+/GET 1.21, SIM-карта установлена, PIN отключен, активен тариф с передачей данных.
2. Панель Honeywell Ademco Vista-48 (Vista-20, Vista-15) с доступом к клавиатуре (есть код установщика).
3. Номер учетной записи CMS, если используется передача в CMS.


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

Accept

Reject

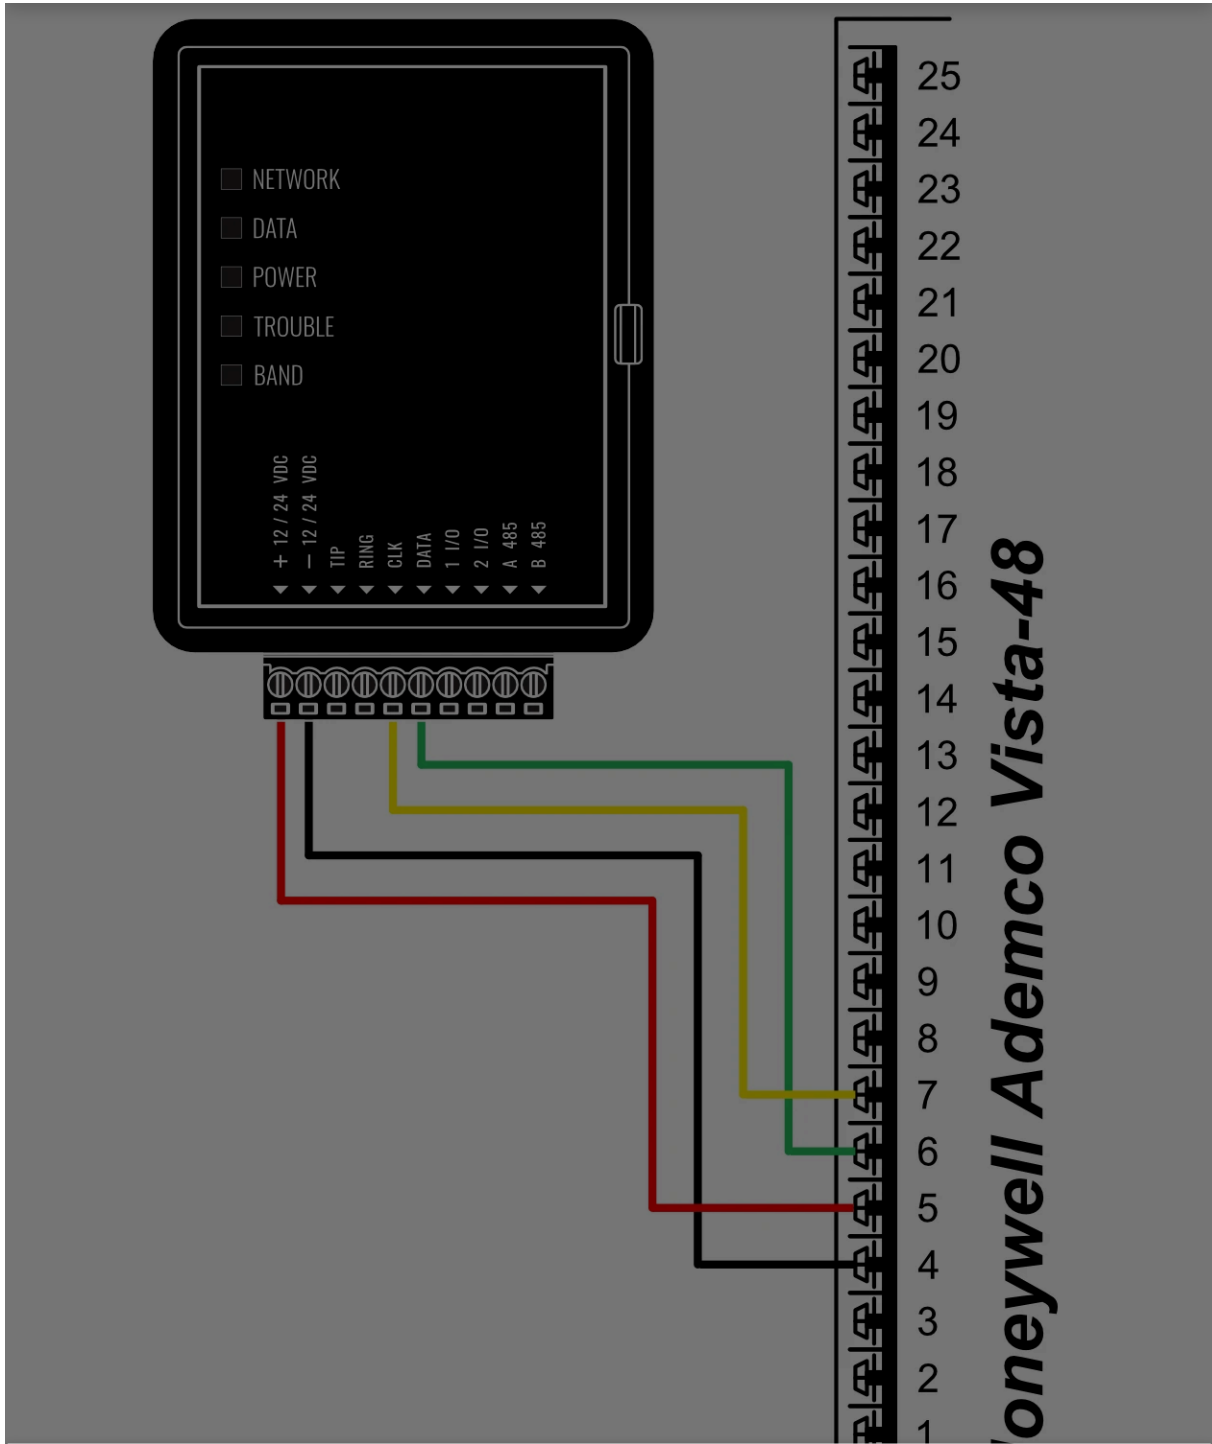

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

- Google Analytics



**Включение отчетов Contact ID**

Ввод с клавиатуры	Описание действия
*4112800 *	Войти в режим программирования
*591 *	Включить "Exit Error Report Code".
*601 *	Включить "Trouble Report Code".
*611 *	Включить "Bypass reporting Code".
*621 *	Включить "AC Mains Loss Report Code".
*631 *	Включить "Low Battery Report Code".
*641 *	Включить "Test Report Code".
*651 *	Включить "Open Report Code".
*661 *	Включить "Arm Away/Stay Report Code".
*671 *	Включить "RF Low Battery Report Code".
*681 *	Включить "Cancel Report Code".
*691 *	Включить "Alarm Restores".
*701 *	Включить "Alarm Restore Report Code".
*711 *	Включить "Trouble Restore Report Code".
*721 *	Включить "Bypass Restore Report Code".
*731 *	Включить "AC Mains Restore Report Code".
*741 *	Включить "Low Battery Restore Report Code".
*751 *	Включить "RF Low Restore Code".
*761 *	Включить "Test Restore Report Code".
*291 *	Включить "ECP Contact ID Output for ACM".
*1891 *	Включить "AUI Device 1 and 2 Enable".
*99	Выйти из режима программирования.


4. Добавление системы в Protegus2

Шаг 1. Нажмите **Add new system**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

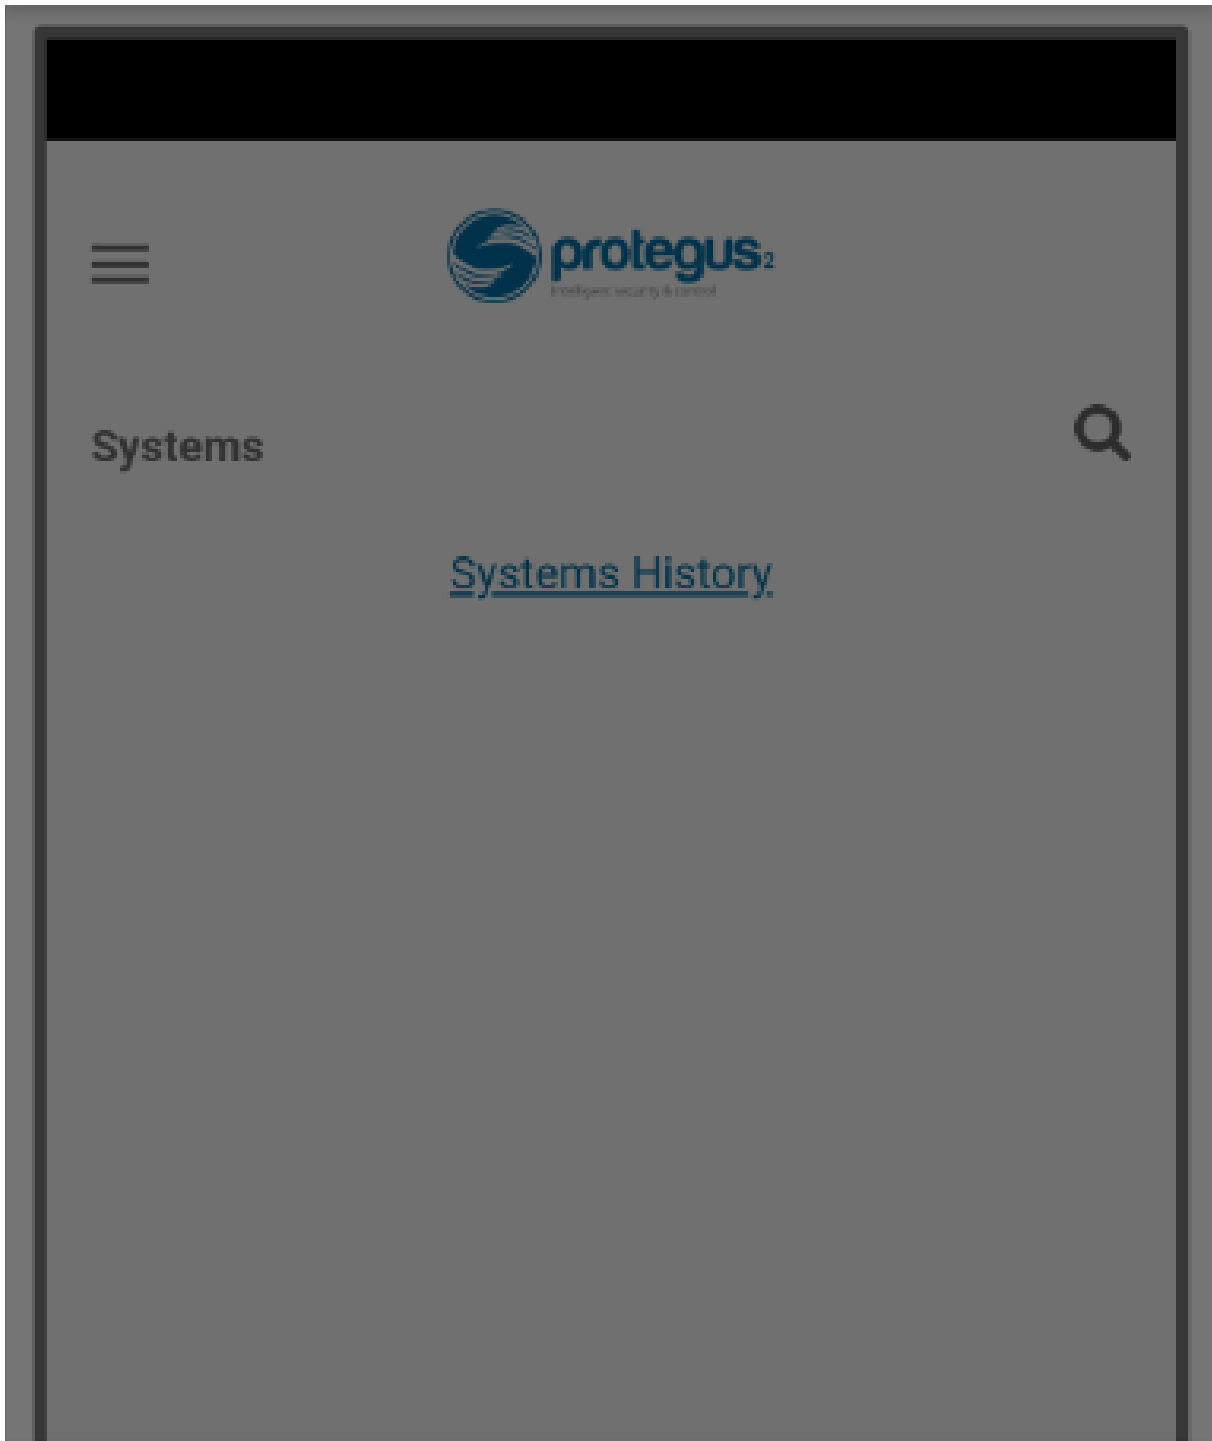

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Шаг 2. Введите **IMEI** коммуникатора, нажмите **Next**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



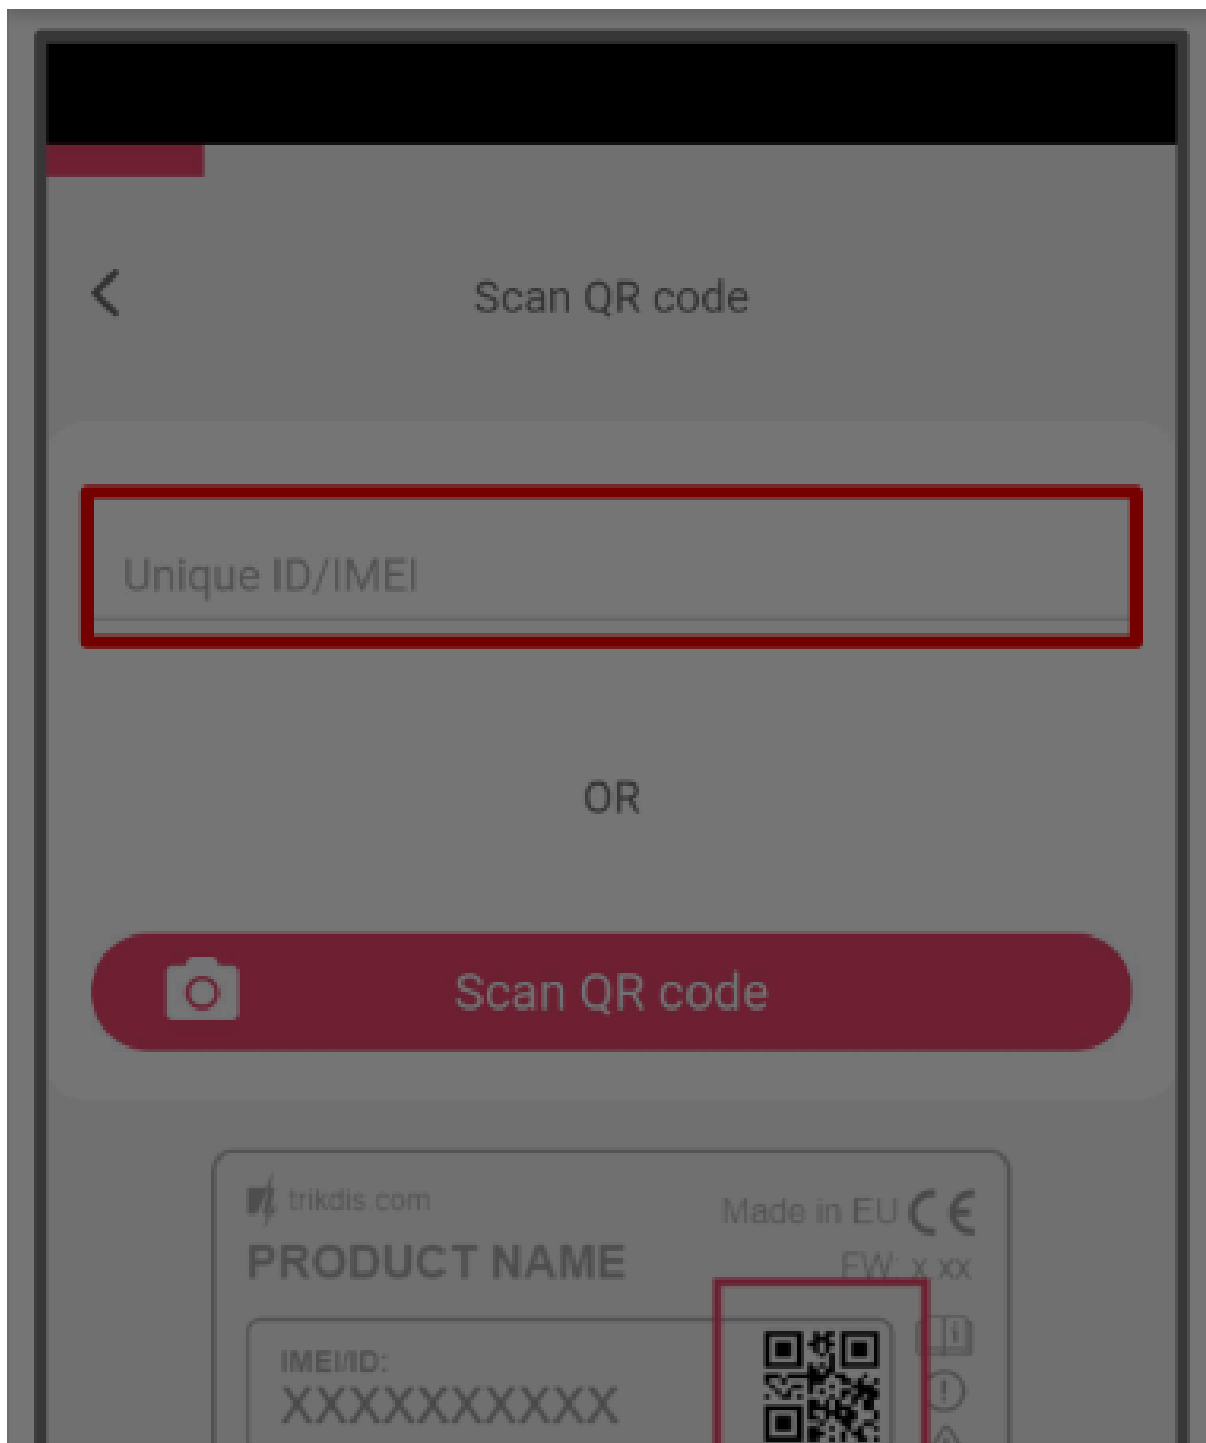


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



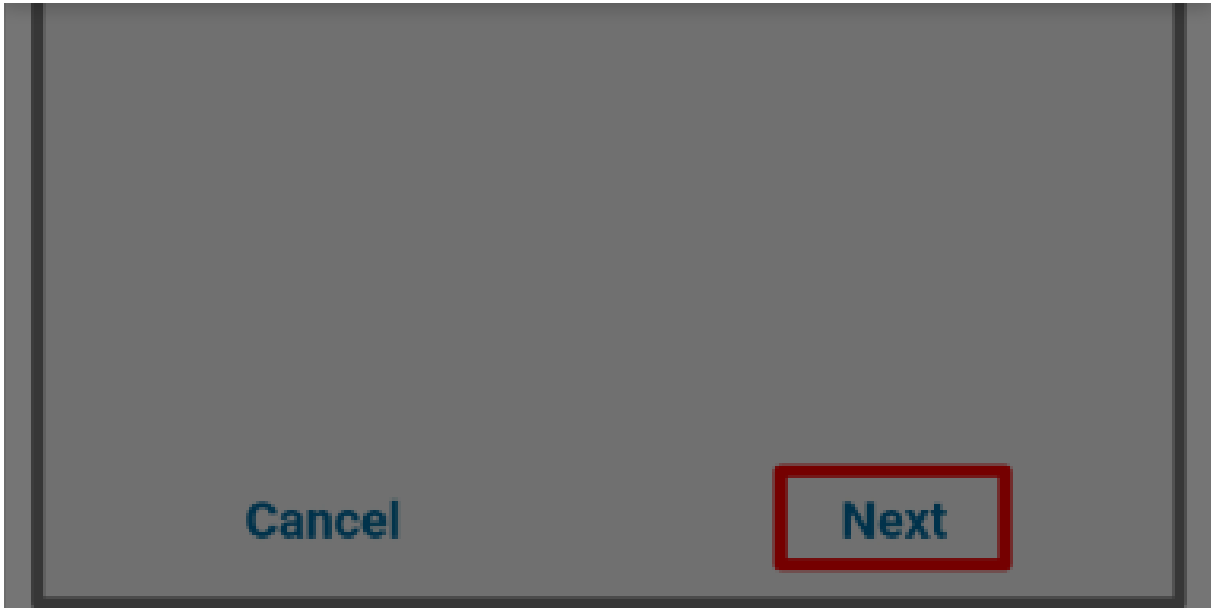


Шаг 3. Выберите охранную компанию.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



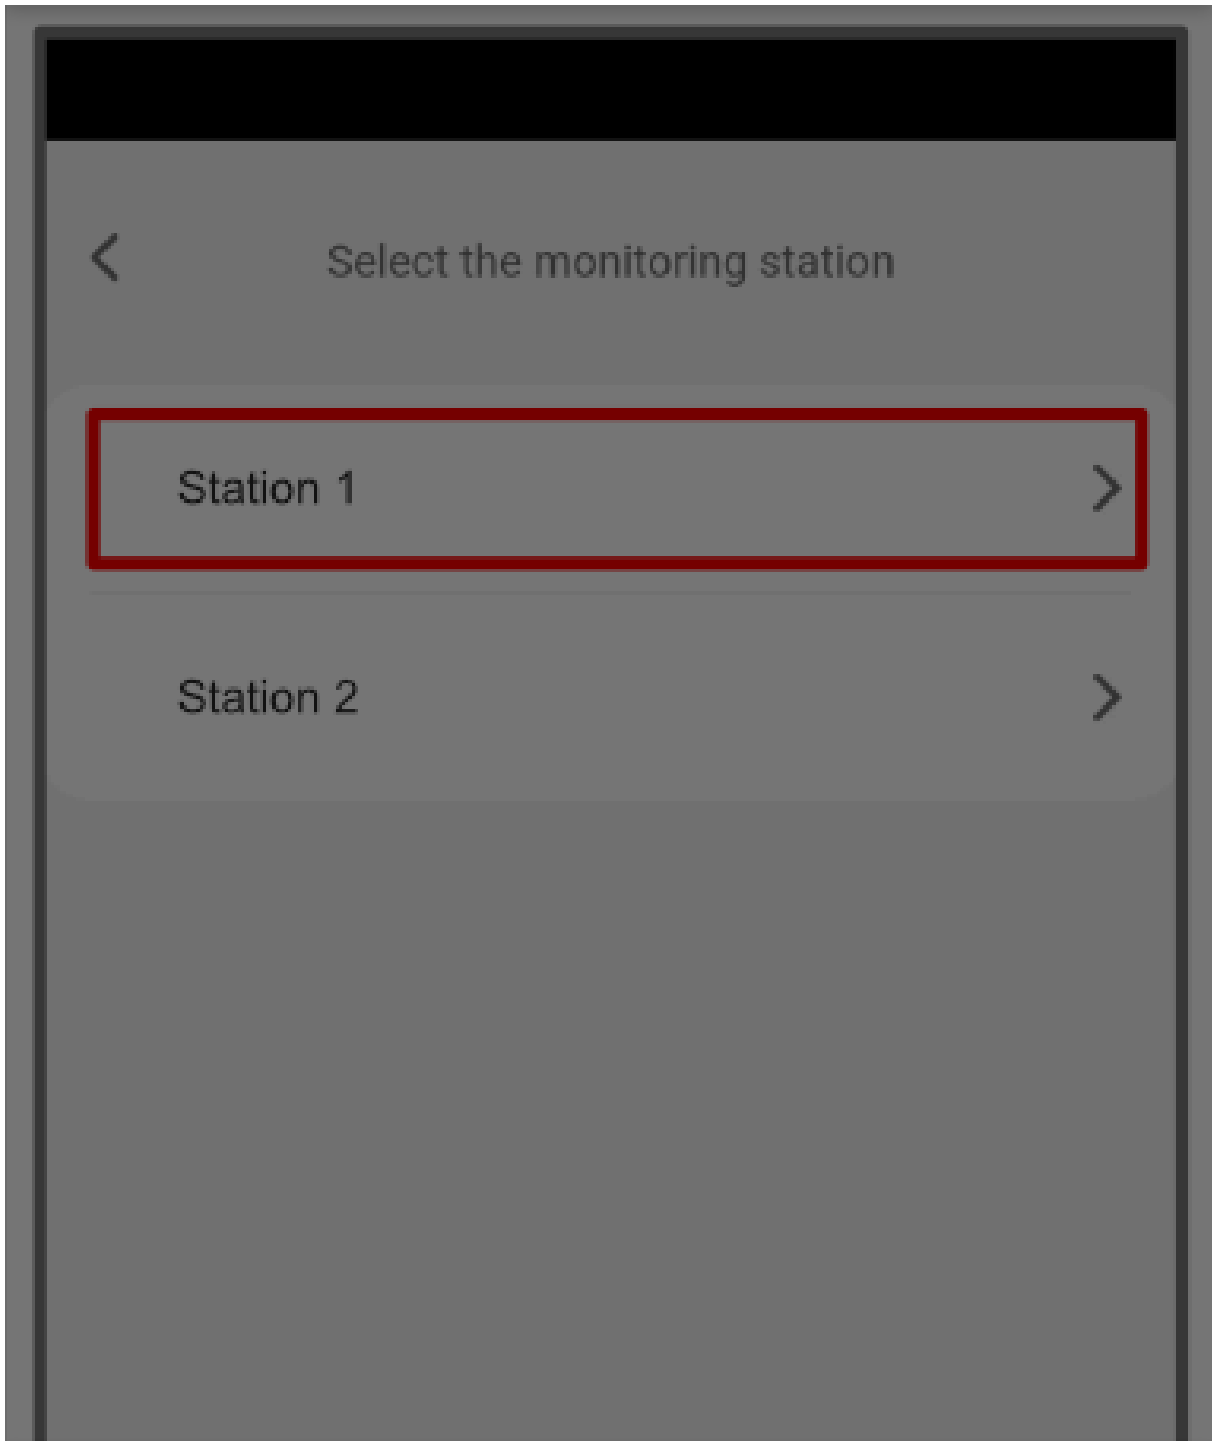

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel

Add only to Protegus2


Шаг 4. Выберите **Honeywell**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



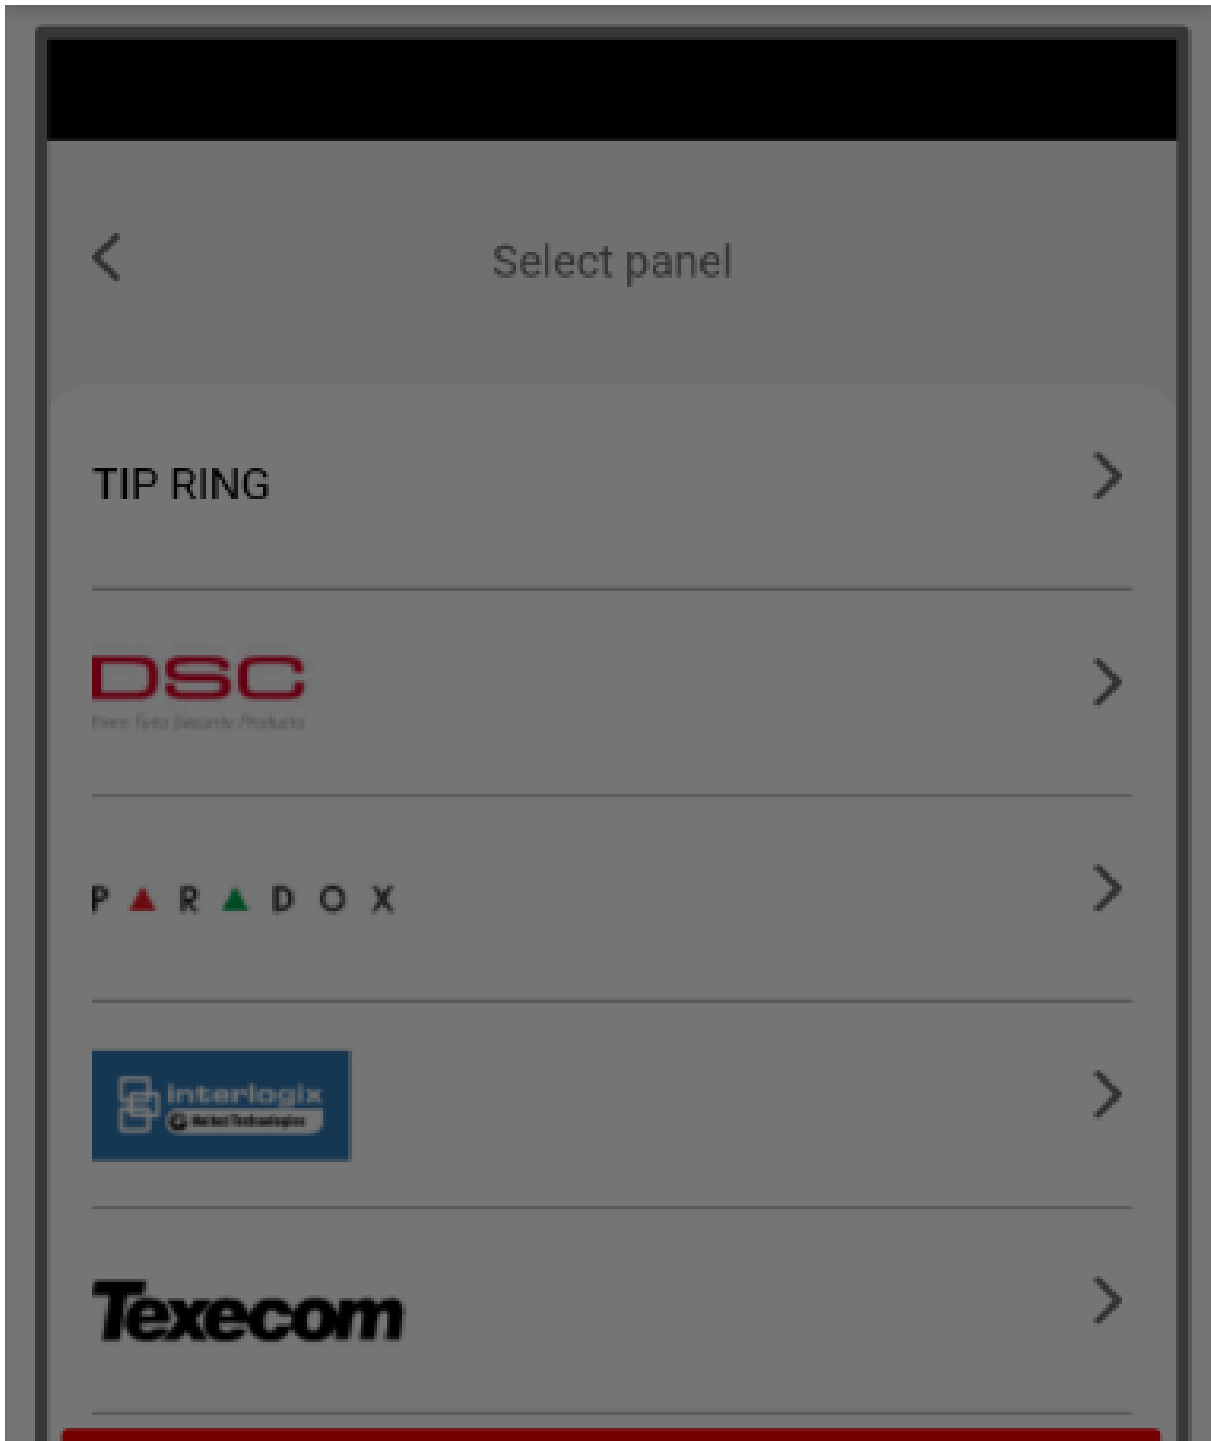

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



Cancel


Шаг 5. Выберите **Vista 48 (Vista 20, Vista 15)**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Шаг 6. Введите **Object ID** и **Module ID**, нажмите **Next**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




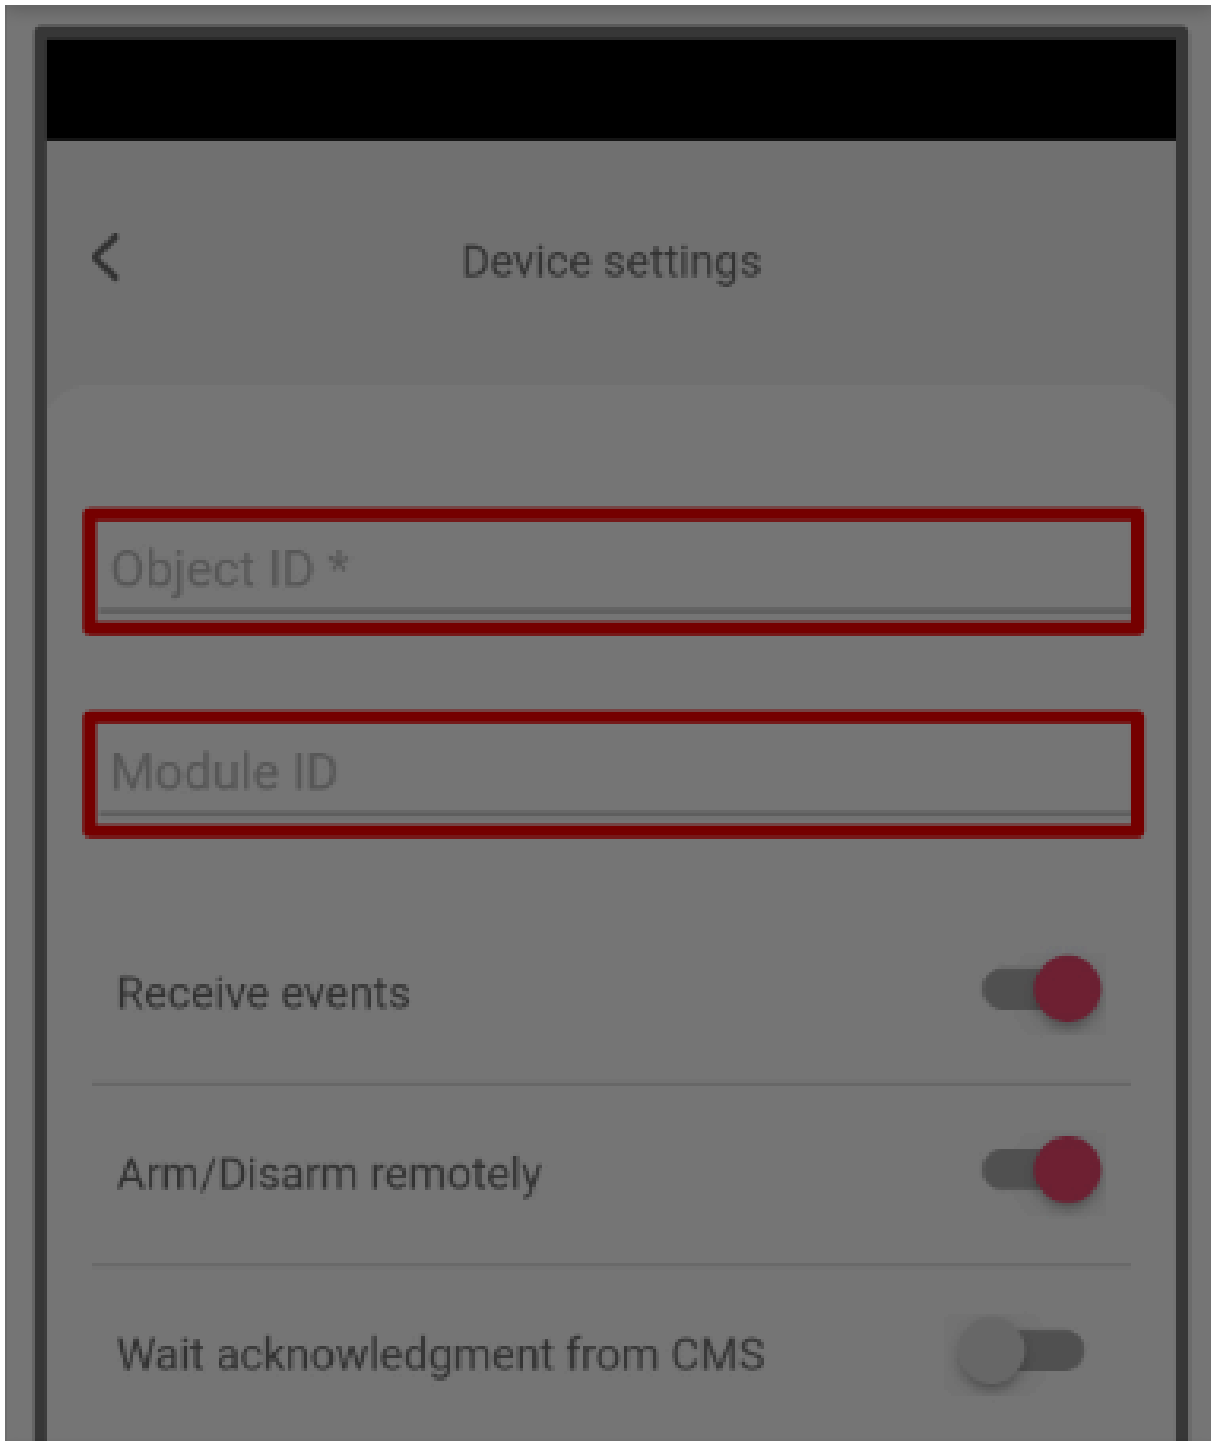

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




Шаг 7. Подождите, пока записываются данные.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



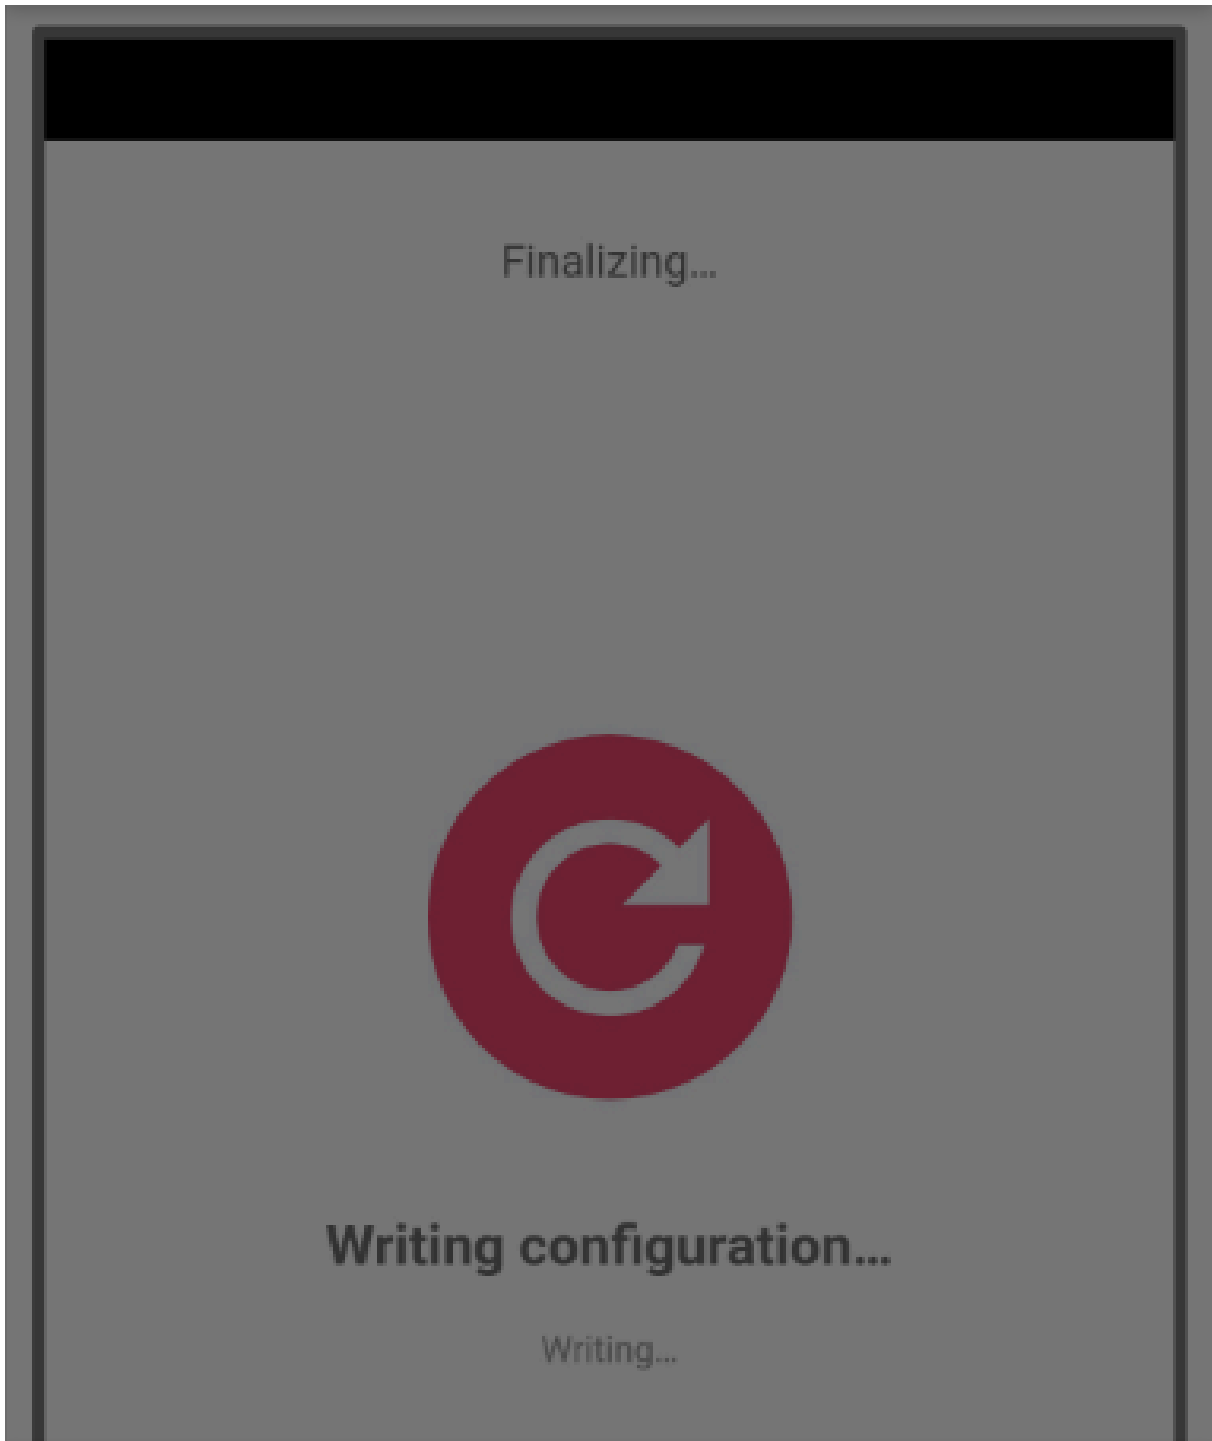

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





Cancel


Шаг 8. Нажмите **Add to Protegus2**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




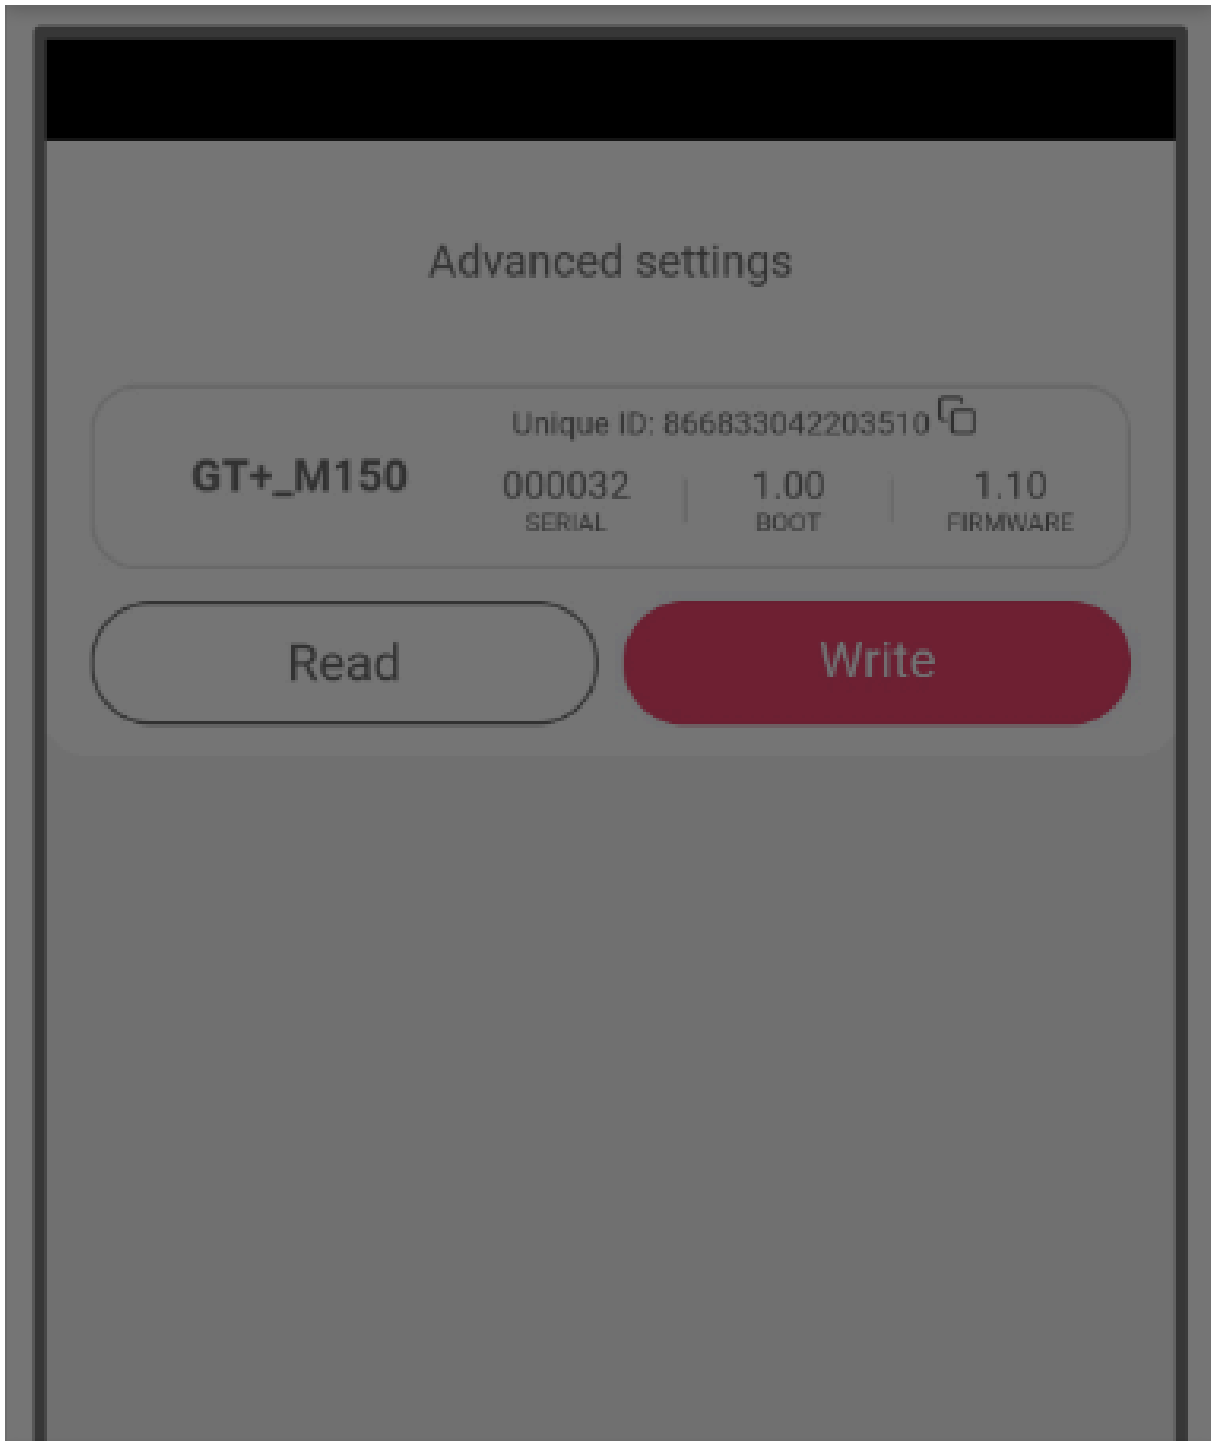

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

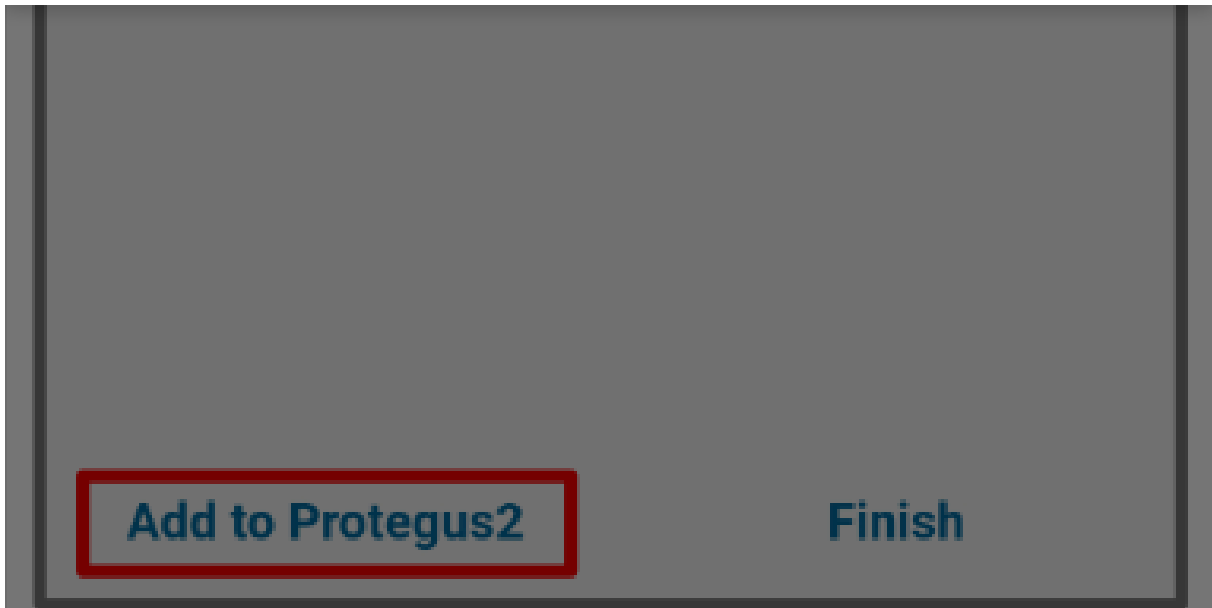


Шаг 9. Введите **Name** системы, нажмите **Next**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics




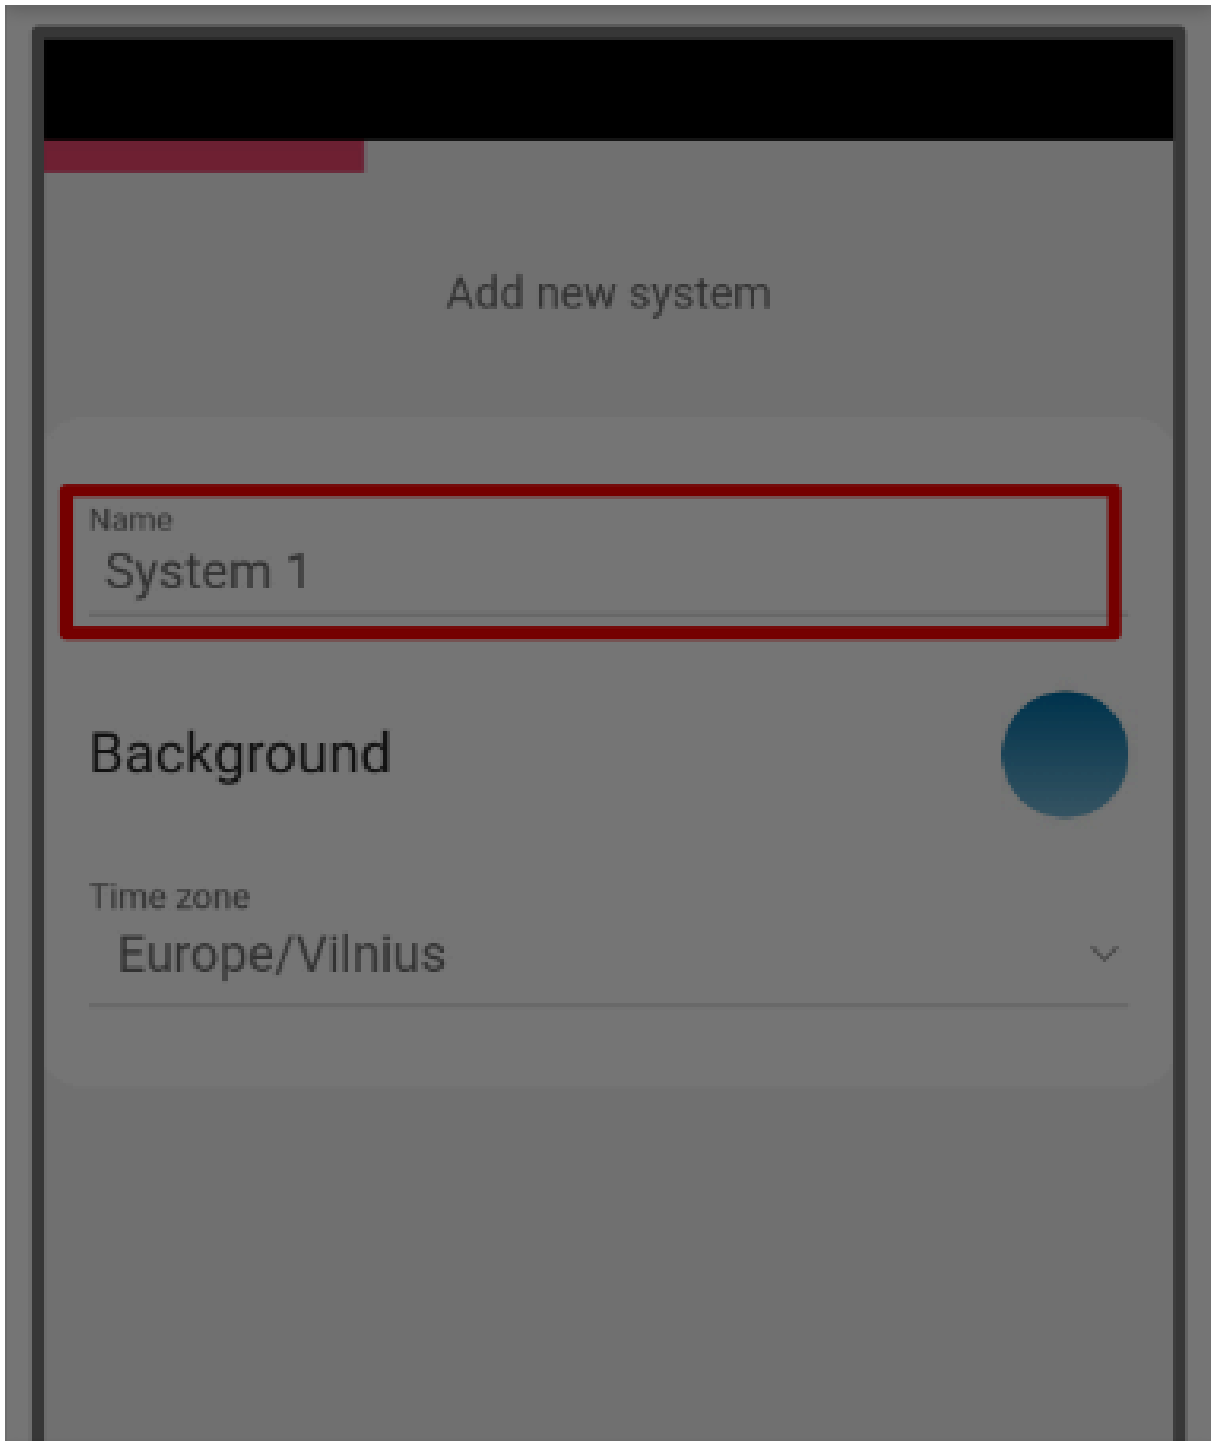

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

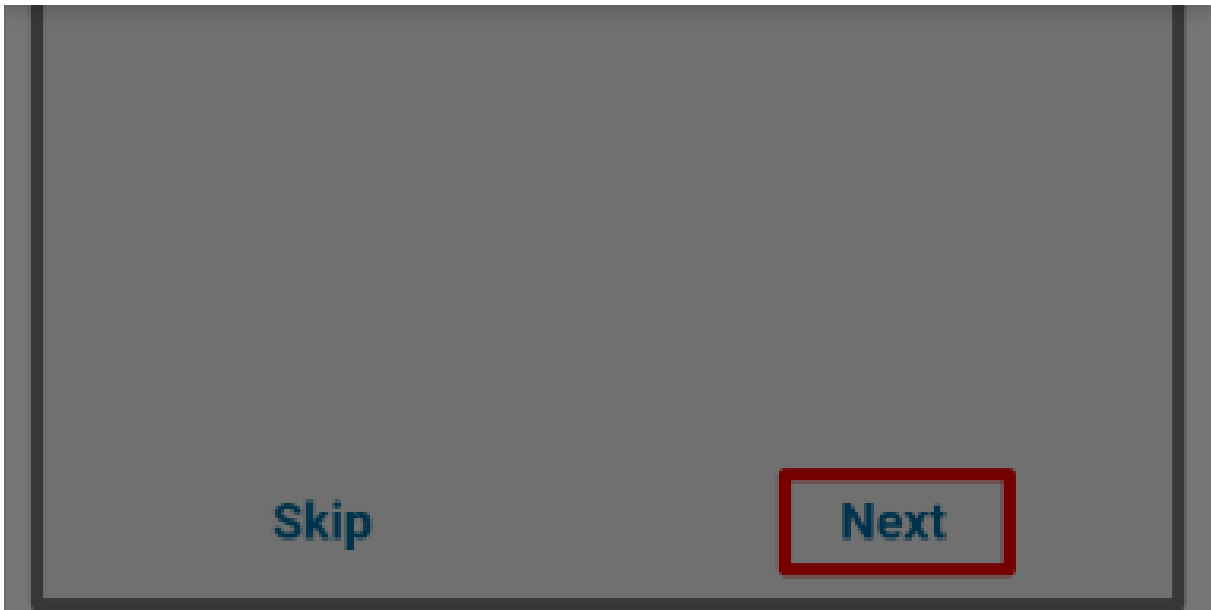


Шаг 10. Нажмите **Skip**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



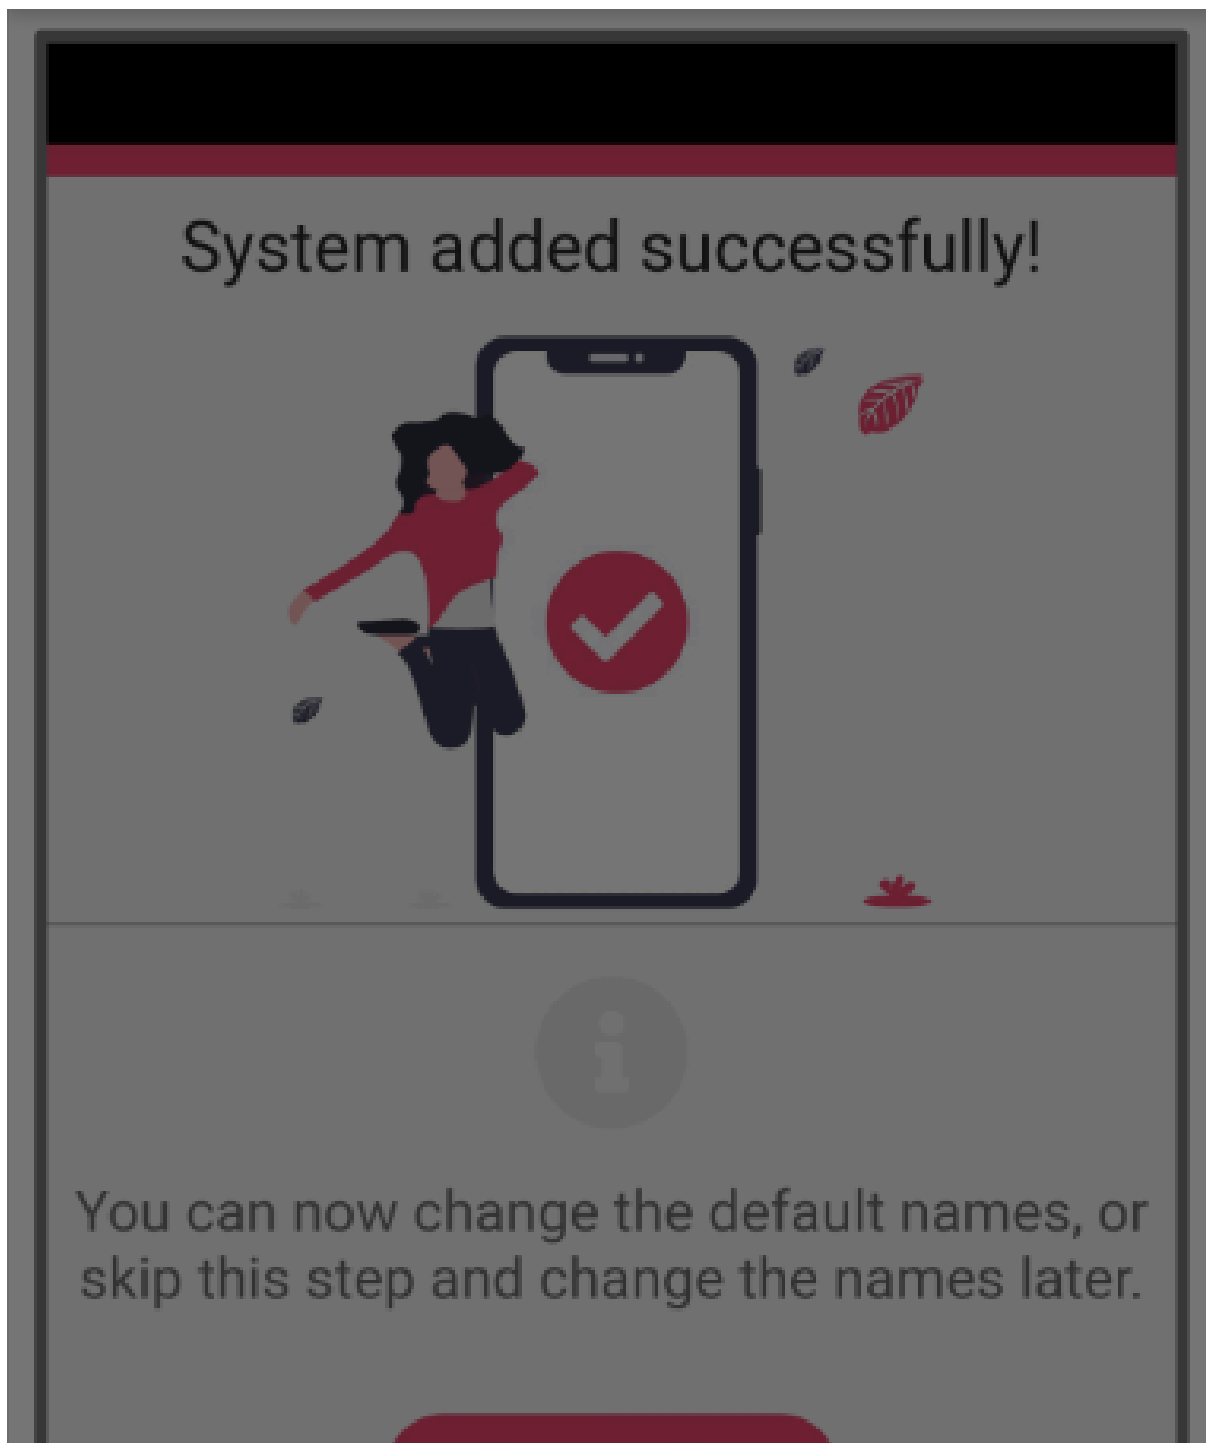


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Шаг 11. Нажмите на систему.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



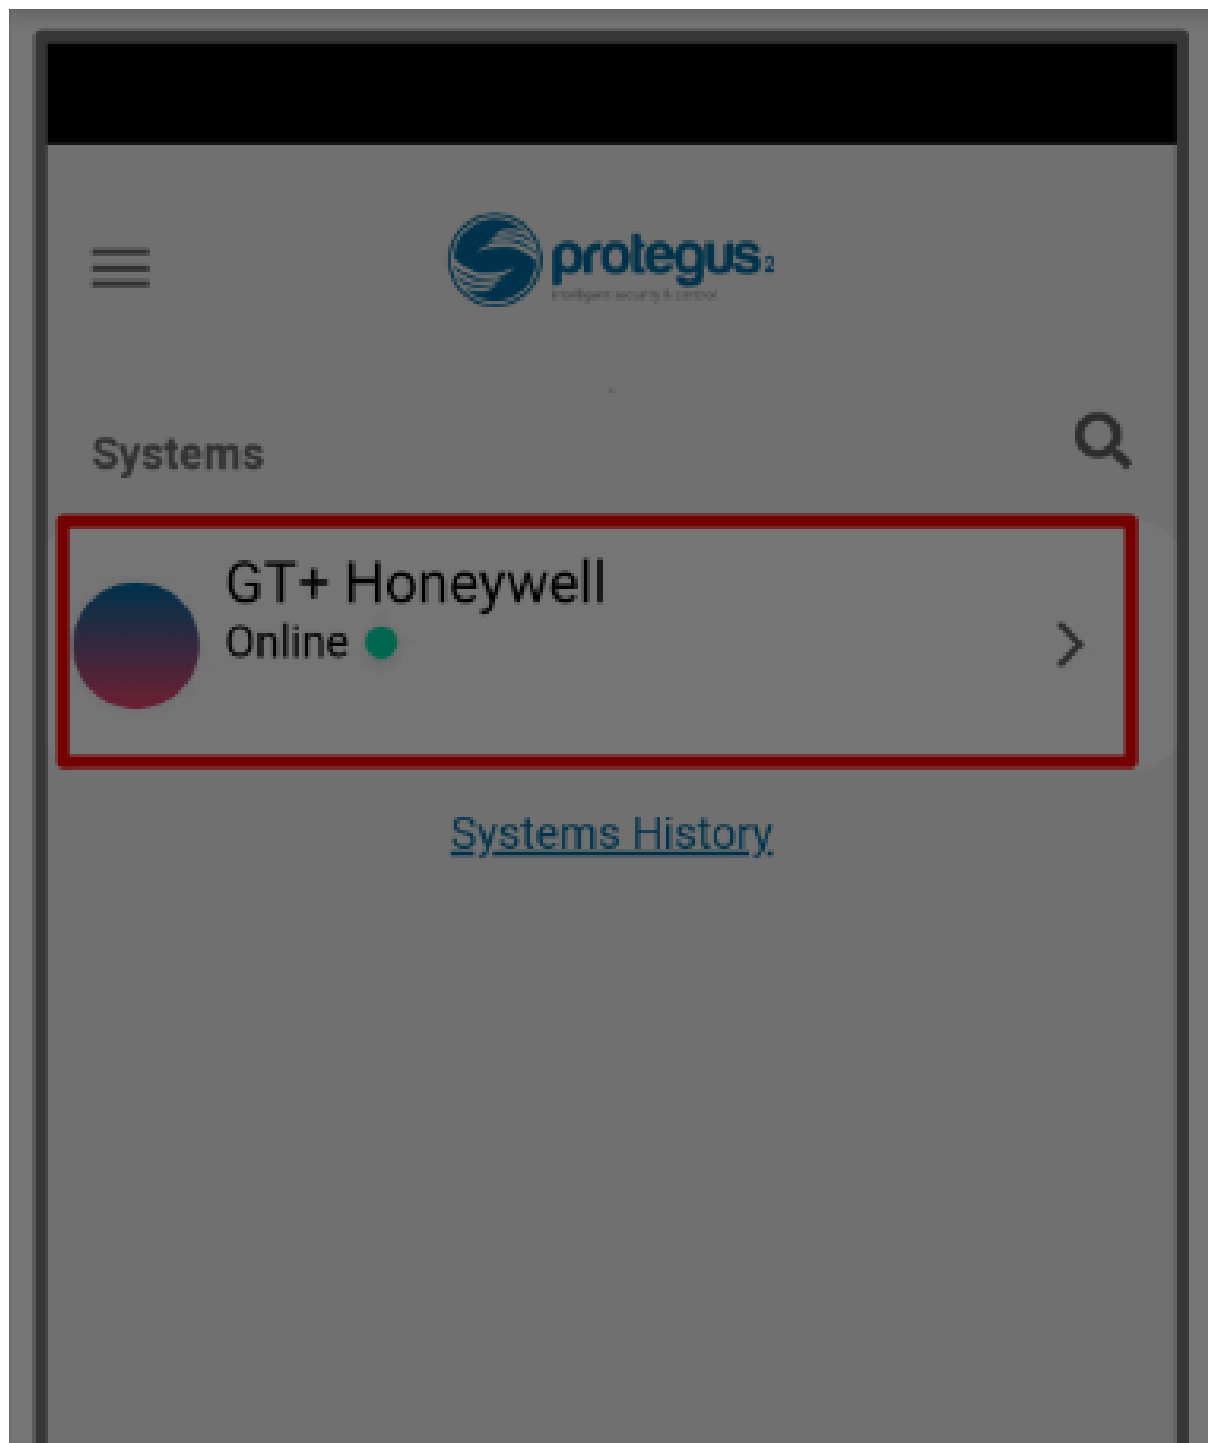

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics






Шаг 12. Подождите 1 минуту для завершения и нажмите **Transfer**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



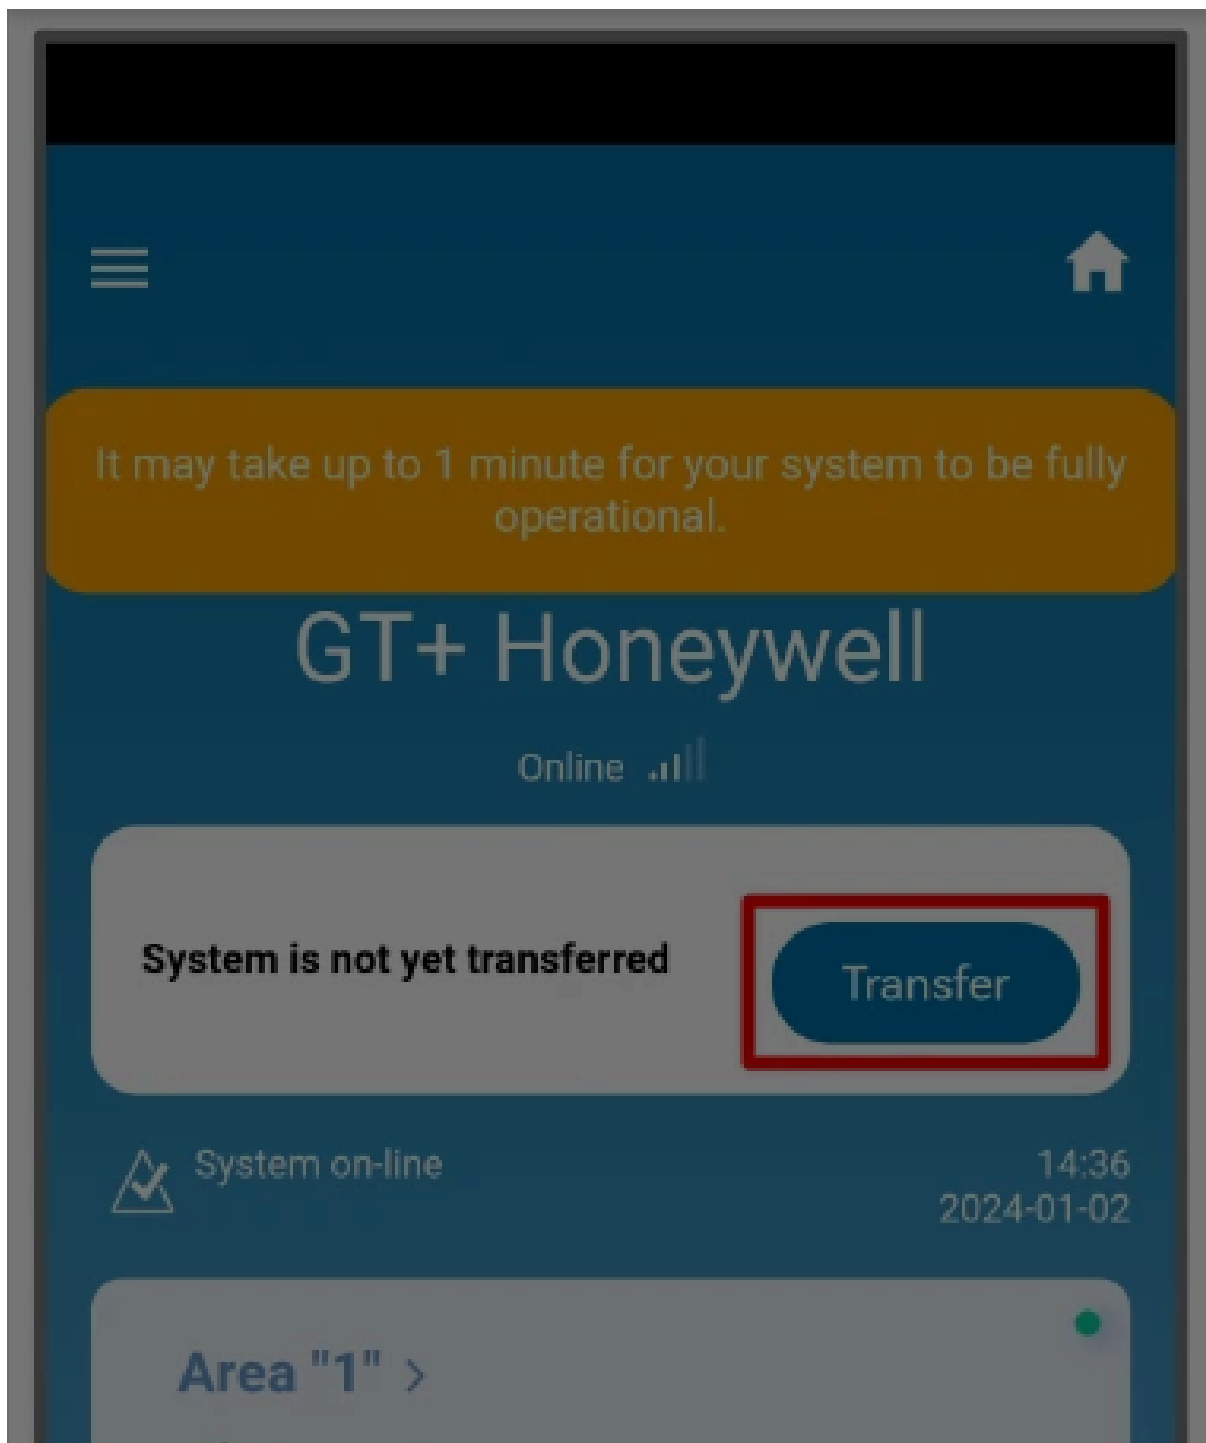


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



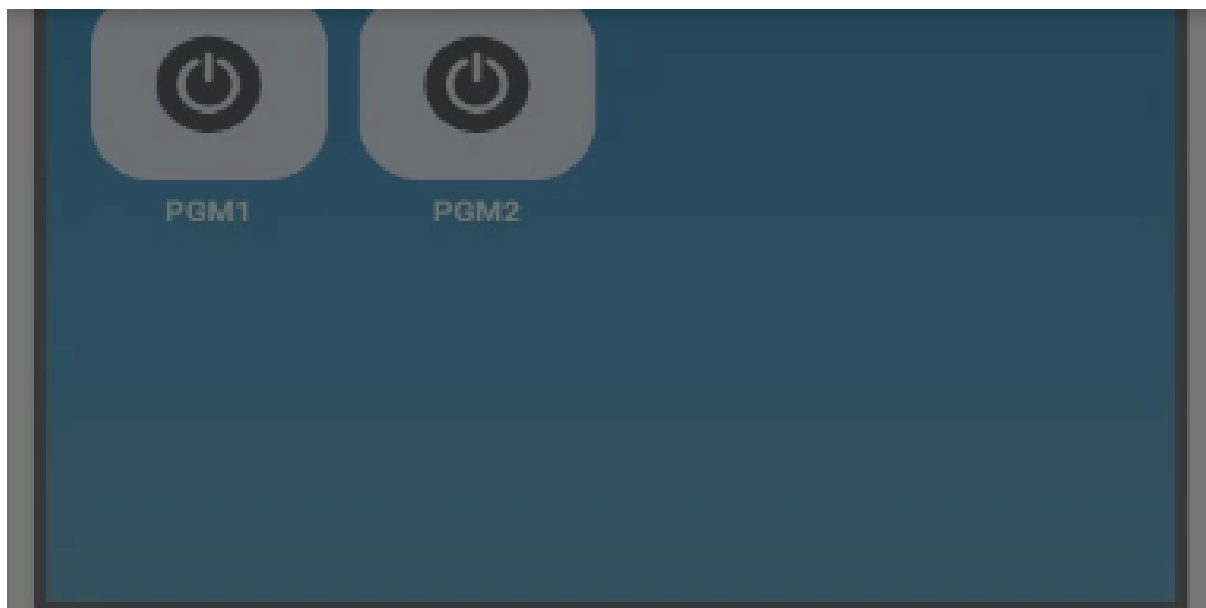


Шаг 13. Введите e-mail пользователя, которому установщик передаст систему.
Нажмите **Transfer**.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



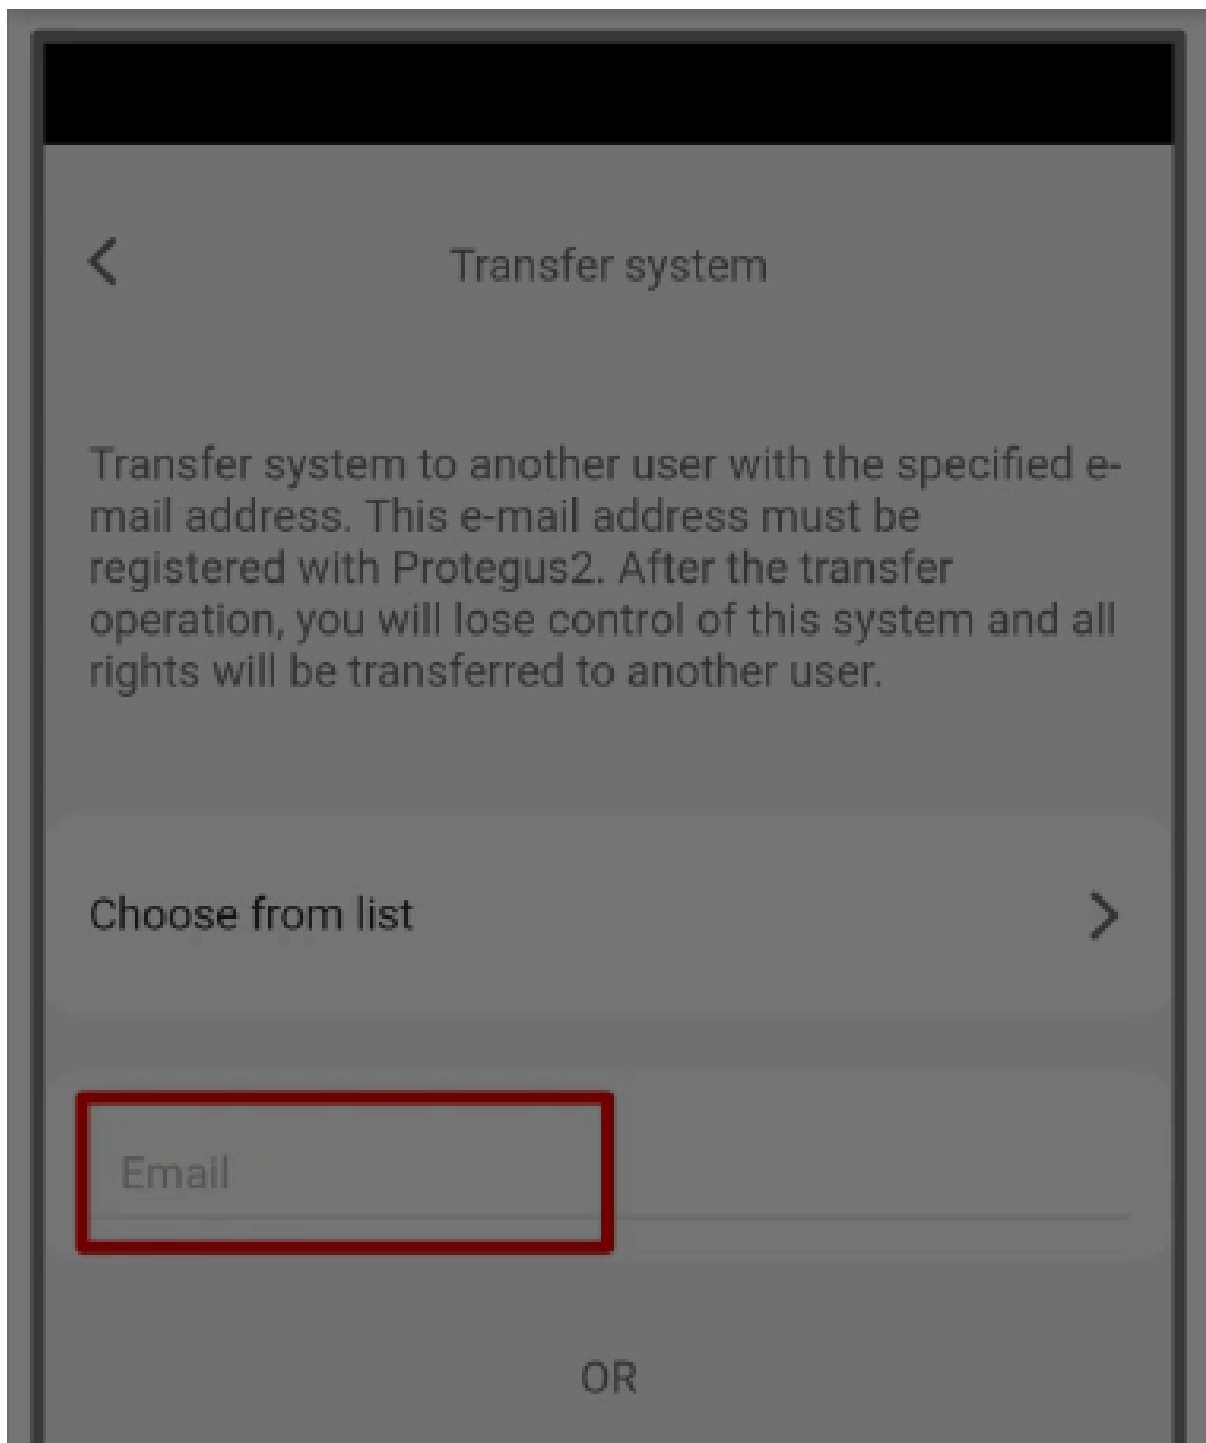


Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



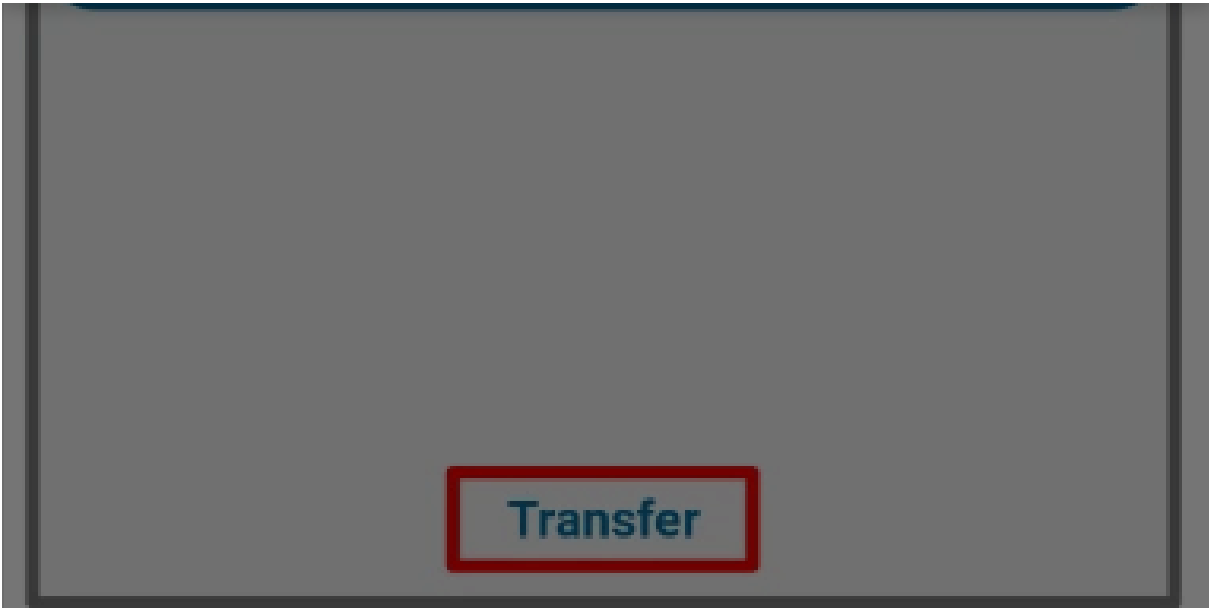

Transfer


Шаг 14. Система появится в Protegus на телефоне пользователя.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics



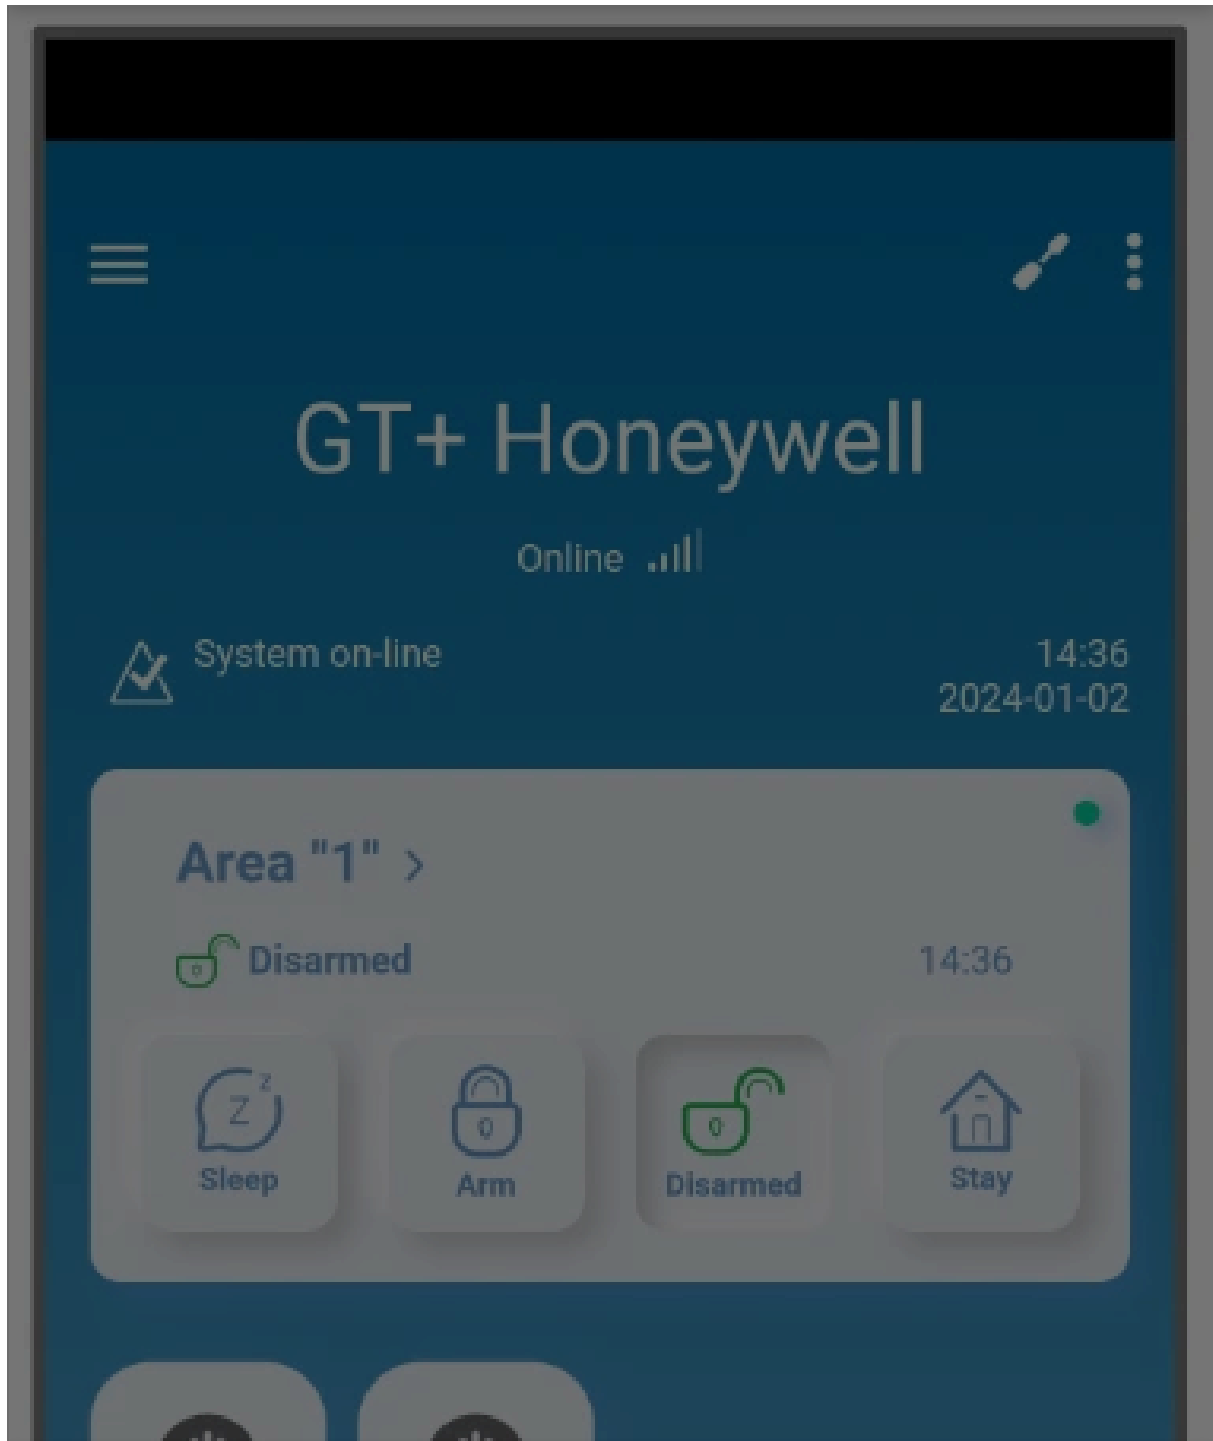

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics





СОВЕТ

После завершения установки и настройки выполните проверку системы:

1. Создайте событие:

- поставьте/снимите систему с охраны с клавиатуры панели управления.
- вызовите тревогу зоны при включенной охране.

2. Убедитесь, что событие поступает в CMS (Central Monitoring Station) и в приложение Protegus2.

Cookie consent

We use cookies to measure the effectiveness of our documentation and whether users find what they're searching for. With your consent, you're helping us to make our documentation better.

Google Analytics

